June 1982 $2.95

73 MAGAZINE
FOR RADIO AMATEURS

TVRO Receiver Project

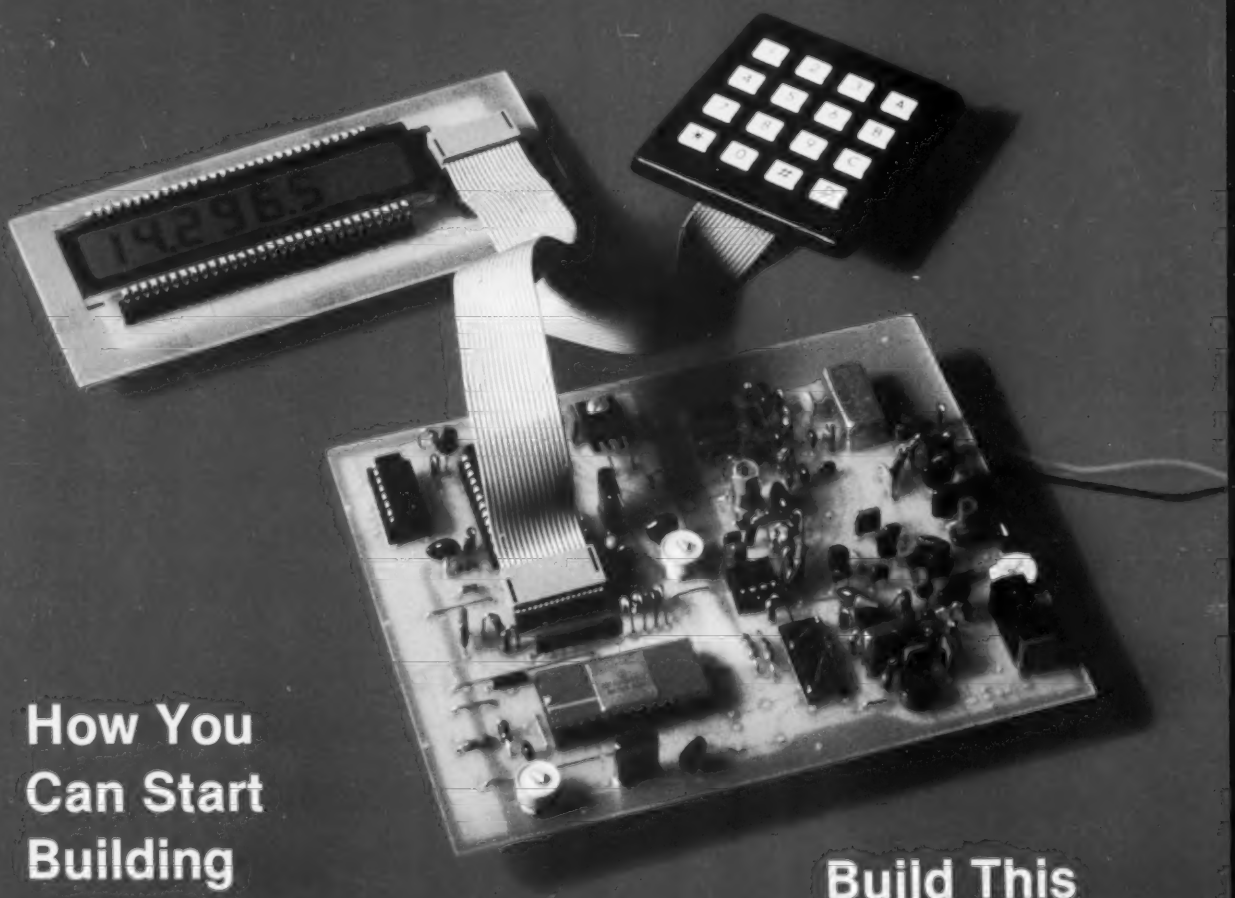

How You Can Start Building

Build This Digital Vfo

0 74470 65946 06

ICOM IC-720A

Multi mode operation includes CW/AM/SSB/RTTY — Normally used side band selected automatically.

Simple to use Dual VFO's standard Data transfer button for marking a frequency of interest and storing it in unused VFO.

Continuously variable power from 10W to full power — speech processor — LDA channeling module included provides auto band changing capability when increasing your power using the IC-2KL broad banded solid state linear.

Broadbanded solid state transceiver operation on the 9 amateur HF bands — Readout of mode in use and VFO — Status LEDs for push button functions.

General coverage receiver from a 0.1MHz to 29.999.9MHz – Split VFO operation — Frequency memorized in standby VFO.

Use of RF/ALC switch in conjunction with the internal top hatch cover switches allows monitoring relative RF Out, SWR, and ALC.

The ICOM HF System. We Have You Covered.

HF/VHF/UHF AMATEUR AND MARINE COMMUNICATION EQUIPMENT

ICOM

ICOM AMERICA, INCORPORATED

Sales Service Centers located at:

2112 116th Avenue NE
Bellevue, WA 98004
Phone (206) 454-8155

3331 Towerwood Dr., Suite 307
Dallas, TX 75234
Phone (214) 620-2780

All stated specifications are approximate and subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions.

5-STORE BUYING POWER *in action!*

YAESU
HAND HELD's

2 METER FM

CALL FOR SPECIAL PRICES

70CM FM

FT-208R FT-708R

ETO ALPHA

ALL ALPHA AMPLIFIERS ARE IN STOCK FOR FAST DELIVERY

CALL FOR SPECIAL PRICES

MIRAGE B-1016
2 METER AMPLIFIER

160W OUTPUT, SSB, FM, CW.

Freq. range:144-148MHz ● RF out:160W nom. (10W in) ● RF power in. 5-15W ● DC operating pwr: 13.8VDC @ 20-25A ● Intermittent duty cycle ● Built-in receiver pre-amp. Automatic internal or external relay keying.

REGULAR $279.95 **$249.95**

KLM/TRI-EX

KLM KT-34A
4 element tri-bander

Regular $389.95 *Sale* **$309**

KLM KT-34XA
6 element tri-bander

Regular $569.95 *Sale* **$469**

KLM 7.2-1 40M rotatable dipole.
Regular $199.95 Special **$159.00**

KLM 7.2-2 40M, 2 element beam.
Regular $349.95 Special **$299.00**

KLM 7.2-3 40M, 3 element beam.
Regular $529.95 Special **$449.00**

KLM 7.0-7.3 4A 40M, 4 element beam.
Regular $749.95 Special **$629.00**

144-148-13LB. 2M, 13 el.long boom.
Regular $89.95 Special **$77.95**

432-16LB 432MHz, 16 el. long boom.
Regular $74.95 Special **$60.70**

144-150-16C, 2M, 16 el. Cir pol.
Regular $116.95 Special **$93.55**

420-450-18C 435 MHz 18 el. Cir pol.
Regular $69.95 Special **$58.70**

TRI-EX W51, 51 foot tower.
Regular $999.95 Special **$829.95**

COMBO DEALS

W51 TOWER w/ KT-34A
$1099

W51 TOWER w/ KT-34XA
$1239

PRICES ARE FOB CALIFORNIA.
FREIGHT IS NORMALLY EXTRA
ON ANTENNAS & TOWERS
except for certain combinations. Please inquire.

KENWOOD
BIG FIVE

Cash in on our 5-store buying power. Most items in stock for fast delivery.

CALL NOW!

TS-930S

TS-130S

TR-2500

TR-7730

TS-830S

ALL LISTED ANTENNAS/TOWERS IN STOCK...no wait.

WE'LL MATCH OR BEAT ANY LEGITIMATE KLM/TRI-EX PRICE!

SERVING HAMS BETTER.
North...south...east...west.

Bob Ferrero,W6RJ/K6AHV, Jim Rafferty, N6RJ other well known hams give you courteous, personalized service.

FREE PHONE 800 854-6046

9:30AM to 5:30PM PACIFIC TIME.
OVER-THE-COUNTER, 10AM to 5:30PM.
MONDAY THROUGH SATURDAY
CALIFORNIA CUSTOMERS PLEASE PHONE OR VISIT LISTED STORES

FREE SHIPMENT *(U.P.S. Brown)* CONTINENTAL U.S.A.

HAM RADIO OUTLET

ANAHEIM, CA 92801
2620 W. La Palma,
(714) 761-3033 (213) 860-2040
Between Disneyland & Knott's Berry Farm

BURLINGAME, CA 94010
999 Howard Ave., (415) 342-5757
5 miles south on 101 from S.F. Airport.

OAKLAND, CA 94609
2811 Telegraph Ave., (415) 451-5757
Hwy 24 Downtown. Left 27th off-ramp.

SAN DIEGO, CA 92123
5375 Kearny Villa Road (714) 560-4900
Hwy 163 & Clairemont Mesa Blvd.

VAN NUYS, CA 91401
6265 Sepulveda Blvd., (213) 988-2212
San Diego Fwy at Victory Blvd.

AEA • ALLIANCE • ALPHA • AMECO • AMPHENOL • ARRL • ASTRON • AVANTI • BENCHER • BERK-TEK • BIRD • B&W • CALLBOOK • CDE • COLLINS • CUSIC • CURTIS • CUSHCRAFT • DAIWA • DATONG • DENTRON • DRAKE • DX ENGINEERING • EIMAC • HUSTLER • HY-GAIN • ICOM • J W MILLER • KENWOOD • KLM • LARSEN • LUNAR • METZ • MFJ • MICRO • LOG • MINI • PRODUCTS • MIRAGE • NYE • PALOMAR • ROBOT • ROHN • SHURE • SWAN • TELEX • TELREX • TEMPO • TEN-TEC • TRISTAO • YAESU and many more!

Prices, specifications, descriptions subject to change without notice. Calif. residents please add sales tax.

INFO

Manuscripts

Contributions in the form of manuscripts with drawings and/or photographs are welcome and will be considered for possible publication. We can assume no responsibility for loss or damage to any material. Please enclose a stamped, self-addressed envelope with each submission. Payment for the use of any unsolicited material will be made upon acceptance. All contributions should be directed to the *73* editorial offices. "How to Write for 73" guidelines are available upon request.

Editorial Offices:

Pine Street
Peterborough NH 03458
Phone: 603-924-9471

Advertising Offices:

Elm Street
Peterborough NH 03458
Phone: 603-924-7138

Circulation Offices:

Elm Street
Peterborough NH 03458
Phone: 603-924-9471

Subscription Rates

In the United States and Possessions:
One Year (12 issues) $25.00
Two Years (24 issues) $38.00
Three Years (36 issues) $53.00

Elsewhere:

Canada—$27.97/1 year only. U.S. funds. Foreign surface mail—$44.97/1 year only. U.S. funds drawn on U.S. bank. Foreign air mail—please inquire.

To subscribe, renew or change an address:

Write to *73 Magazine*, Subscription Department, PO Box 931, Farmingdale NY 11737. For renewals and changes of address, include the address label from your most recent issue of *73*. For gift subscriptions, include your name and address as well as those of gift recipients. Postmaster: Send form #3579 to *73 Magazine*, Subscription Services, P.O. Box 931, Farmingdale, NY 11737.

Subscription problem or question:

Write to *73 Magazine*, Subscription Department, PO Box 931, Farmingdale NY 11737. Please include an address label.

73 Magazine (ISSN 0098-9010) is published monthly by 73, Inc., a subsidiary of Wayne Green, Inc., 80 Pine Street, Peterborough NH 03458. Second class postage paid at Peterborough NH 03458 and at additional mailing offices.
Entire contents copyright 1982, Wayne Green, Inc. All rights reserved. No part of this publication may be reprinted or otherwise reproduced without written permission from the publisher.
Microfilm Edition—University Microfilm, Ann Arbor MI 48106.

When it comes to
AMATEUR RADIO QSL's . . .

it's the
ONLY BOOK!
US or Foreign Listings

1982 callbooks

Here they are! The latest editions. World-famous Radio Amateur Callbooks, the most respected and complete listing of radio amateurs. Lists calls, license classes, address information. Loaded with special features such as call changes, prefixes of the world, standard time charts, world-wide QSL bureaus, and more. The U.S. Edition features over 400,000 listings, with over 70,000 changes from last year. The Foreign Edition has over 370,000 listings, over 60,000 changes. Place your order for the new 1982 Radio Amateur Callbooks, available now.

	Each	Shipping	Total
☐ US Callbook	$18.95	$3.05	$22.00
☐ Foreign Callbook	$17.95	$3.05	$21.00

Order both books at the same time for $39.95 including shipping.

Order from your dealer or directly from the publisher. All direct orders add shipping charge. Foreign residents add $4.55 for shipping. Illinois residents add 5% sales tax.

SPECIAL LIMITED OFFER!
Amateur Radio Emblem Patch
only $2.50 postpaid

Pegasus on blue field, red lettering. 3" wide x 3" high. Great on jackets and caps.

ORDER TODAY!

RADIO AMATEUR callbook INC.
Dept. B
925 Sherwood Drive
Lake Bluff, IL 60044, USA

r61

SWR & Power Meter

- **The most advanced automatic computing RF measuring instrument in amateur radio.**
- **Logarithmic SWR scale.**
- **Power ranges 20/200/2000 watts.**
- **Frequency range 1-30 MHz.**

Automatic. No "set" or "sensitivity" control. Computer sets full scale so SWR reading is always right. Complete hands-off operation.

Light bar display. Gives instant response so you can see SSB power peaks. Much faster than old-fashioned panel meters. Baton switch selects three power ranges.

Logarithmic SWR display. Computer expands the display where you need it so it's easier to see, easy to use.

Computer operated. Now an analog computing circuit and digital comparator automatically compute SWR regardless of power level. Frees you from checking zero, setting a "sensitivity" knob and from squinting at old-fashioned cross pointer mechanical meters. With this new meter computing is done electronically and displayed with moving light bars. Individual bars for SWR and power.

Compact, attractive. The new SWR & Power meter is in a 4×4×5 inch metal case with brushed aluminum panel and black vinyl cover. Red light bars. Baton switches. For 115-v 50/60 Hz.

Model M-827 Automatic SWR & Power Meter $97.50 in the U.S. and Canada. Add $3 shipping/handling. California residents add sales tax.

MasterCard VISA

ORDER YOURS NOW!

Palomar Engineers

1924-F West Mission Road
Escondido, CA 92025
Phone (714) 747-3343

Build This Digital Vfo
—a microprocessor makes it simple
. . . . . WA5VQK **12**

Surviving the Unthinkable
—part II: some practical ideas. . . . AKØQ **30**

'Lite Receiver IV
TV —the second half
. . . . . WA4CVP, WA4OSR **52**

TVRO Transducer
TV —waveguide-to-coax transition
. . . . . WA4CVP, WA4OSR **58**

The MTV Music Box
TV —Satellite Central, part VII
. . . . . Gibson **60**

june 82
73 MAGAZINE
Vol. XXII No. 9

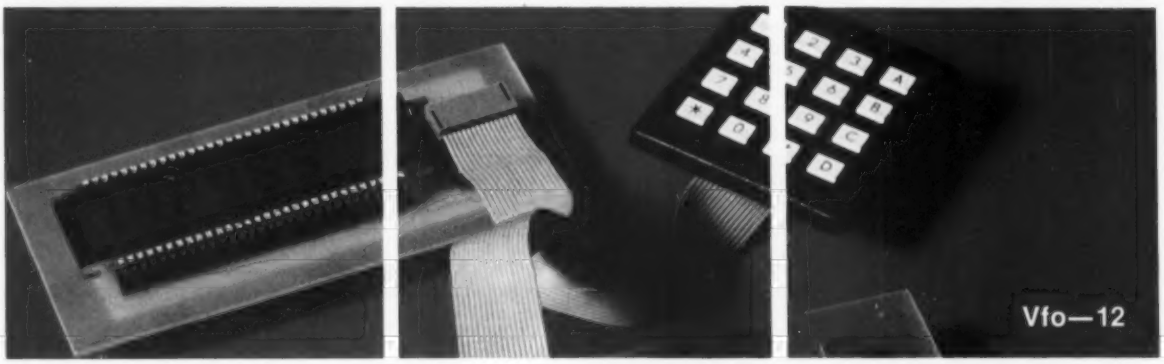

A Split Personality for the KDK FM2015R
. . . . . KØBV **40**

Building for Beginners
—happiness is a hot soldering iron
. . . . . N1II **42**

Coping with PC Boards
—it's not easy to be virtuous KC7M **48**

Tune In the World's Tinderbox
—SWLing from Cairo to Kuwait
. . . . . Peterson **66**

Are You Ready for 900 MHz?
. . . . . WB4LNM **74**

Crime-Stoppers' Textbook
—rules of thumb for would-be gumshoes
. . . . . Diefenbach **84**

Never Say Die—6, Ham Help—64, 92, 94, 95, 108, 118, Corrections—64, 96, Social Events—88, Satellites—97, Fun—98, DX—99, Letters—101, Contests—104, Awards—106, Reader Service—114, Review—115, New Products—119, Dealer Directory—162, Propagation—162

W2NSD/1
NEVER SAY DIE
editorial by Wayne Green

HOOKED

You know, after over forty years of hamming I still don't know exactly what it is that grabs the interest of a teenager and turns him from a normal rotten kid into a raving electronic maniac. I'm told by the doddering grey-bearded old-timers who have taken over most of the ham clubs in the country that youngsters are exposed to the whole world on television and thus find little exciting about talking to weird places.

Hmmm. I'm not convinced. No, amateur radio didn't gradually die off. It was killed with one blow back in 1963. Before that it had been growing at 11% per year for 17 years, right on up through the evolution of television. TV never even slowed it down.

My first exposure to amateur radio must have made a strong impression, because after 50 years I still remember it. Yep, sonny, I was a shaver of ten and while visiting the best friends of my grandparents in Bethlehem, New Hampshire, I met Harry Stevenson W1CUN. His mother, along with Johnny Macauley, ran the Valley View Inn. That was back in the heyday of hotels in Bethlehem. . .30 hotels and 100 rooming houses, the billboard at the entry to town said.

Harry was sitting there laconically talking on a 75m rig. . .a breadboard construction with a big copper tube final coil. He didn't pay a lot of attention to the visiting kid. It didn't occur to me, at ten, that I might ever be able to understand the wizardry of that mass of wires and tubes.

Like a time bomb ticking away, that experience lay hidden, waiting for the spark of puberty to set it off. By 14, I was already familiar with the excitement of the police calls at the top of the broadcast radio dial. Then all it took was an exposure to a fantastic radio my grandfather in Littleton, New Hampshire had. . .with a shortwave band on it! Wow! There were all those foreign broadcast stations. . .and a myriad of hams. I was a roly-poly kid, but the family still had trouble tearing me away from the twenty-meter ham band to eat.

It was at just this juncture that some fiend dumped a box of radio parts in my lap one Sunday at church. Most of the parts were brand new and in their original cartons, so I couldn't just throw them away. Oh, I tried to sell them to the local radio repairman (now gone the way of the ice man), but he sneered at the parts as antiques. *Popular Mechanics* had a radio construction project each month, many of them using parts just like those in my collection, so I put together a radio in an old cigar box. . .and unfortunately it worked. I was hooked.

HOME-BREW CONTEST WINNERS

- 1st place, $250 prize: "Smart Squelch for Single-Sideband Receivers" by Frank Reid W9MKV and David Link W9YAN, both of Bloomington IN.
- 2nd place, $100 prize: "Six-Meter Double-Sideband QRP Transmitter" by Larry Jack KL7GLK of Annapolis MD.
- Honorable mention, $50 each: "MB-1 Function Circuit" by Mike Strange WA2BHB, Pine Hill NJ, "Splattometer" by Penn Clower W1BG, Andover MA, and "Weather Converter for Your Two-Meter Rig" by Paul Danzer N1II, Norwalk CT.

We're sure you have heard it said that "hams are not building anymore; they're just appliance operators." Well, *73*'s Home-brew Contest proves that rumor to be baloney. We were literally buried with entries. The winning projects show that hams are not only building, but that they are still innovating, too.

Our editorial staff burned the midnight oil in early April, choosing five finalists from more than 100 entries. The winners were then picked by three of *73*'s veteran home-brewers: AG9V, K1XR, and W1XU.

The Home-brew Contest winners will be published in future issues of *73*. In the meantime, keep your soldering iron hot—*73* is having another contest. This time there will be a $50 limit for the project's parts.

$$ HOME-BREW II CONTEST $$

Between now and October 1, we'll be looking for articles describing the best home-brew projects in the land for under $50. All useful projects will be published in *73*, and the cream of the crop will share $500 in cash prizes. Top prize in the contest is $250, with $100 going to the second place project and $50 to each of three honorable mentions. These prizes are over and above the payment that all authors receive for having their articles published in *73*.

Contest Rules

1. All entries must be received by October 1, 1982. To enter, write an article describing your best home-brew construction project, and submit the article to *73 Magazine*. Any construction article received before the October 1 deadline is automatically entered in the contest. Any entries for the first Home-brew Contest which meet the $50 requirement for Home-brew II will be automatically entered. If you haven't written for *73* before, please send an SASE for a copy of our author's guide.
2. The total cost of the project must not exceed $50, even if all parts are purchased new. Be sure to include a detailed parts list, with prices.
3. All parts used in the project must be available to the average radio amateur or electronics experimenter. To be on the safe side, include sources for any unusual components.
4. Projects will be judged by the *73* technical staff on the basis of usefulness, reproducibility, economy of design, and clarity of presentation. The decision of the judges is final.
5. All projects must be original, i.e., not previously published elsewhere.
6. All rights to articles purchased for publication become the property of *73 Magazine*.

Send your entries to:

Home-Brew II Contest
73 Magazine
80 Pine Street
Peterborough NH 03458

Winners will be announced in the December, 1982, issue of *73*. Have fun!

KENWOOD

...pacesetter in amateur radio

R-1000
$30.00 OFF

$ CASH NOW! $

ASK YOUR DEALER FOR DETAILS

TR-7730
$30.00 OFF
WITH OR WITHOUT
MC-46

TS-130SE or
TS-130S
$15.00 OFF

TR-8400
$30.00 OFF

TS-530S
$15.00 OFF

Participating Trio-Kenwood Authorized Dealers:

ALABAMA
Long's Electronics
Birmingham, AL 35233
(205) 252-7589

ALASKA
Reliable Electronics
Anchorage, AK 99503
(907) 279-5100

ARIZONA
Power Communications
Phoenix, AZ 85015
(602) 241-9288

CALIFORNIA
Ham Radio Outlet
Burlingame, CA 94010
(415) 342-5757
Ham Radio Outlet
San Diego, CA 92123
(714) 560-4900
Ham Radio Outlet
Van Nuys, CA 91401
(213) 988-2212
Ham Radio Outlet*
Oakland, CA 94609
(415) 451-5757
Ham Radio Outlet
Anaheim, CA 92801
(714) 761-3033
Henry Radio, Inc.
Los Angeles, CA 90025
(213) 820-1234
Henry Radio & Electronics
Anaheim, CA 92801
(714) 772-9200

COLORADO
CW Electronic Sales Co.
Denver, CO 80202
(303) 832-1111

FLORIDA
Amateur Electronic Supply
Orlando, FL 32803
(305) 894-3238
Amateur Radio Center
Miami, FL 33137
(305) 573-8383

HAWAII
Honolulu Electronics
Honolulu, HI 96814
(808) 949-5564

IDAHO
Ross Distributing Co.
Preston, ID 83263
(208) 852-0830

ILLINOIS
Erickson Communications
Chicago, IL 60630
(312) 631-5181

INDIANA
Graham Electronics
Indianapolis, IN 46204
(317) 635-5453
Hoosier Electronics
Terre Haute, IN 47802
(812) 238-1456
Kryder Electronics
Fort Wayne, IN 46815
(219) 485-6434

IOWA
HI, Incorporated
Council Bluffs, IA 51502
(712) 323-0142

KANSAS
Associated Radio Comm.
Overland Park, KS 66204
(913) 381-5901

MARYLAND
Electronic Int'l Service
Wheaton, MD 20902
(301) 946-1088
The Comm. Center
Laurel, MD 20810
(301) 792-0600

MICHIGAN
Radio Supply & Engineering
Detroit, MI 48201
(313) 435-5660

MINNESOTA
Midwest Amateur Radio Supply, Inc*
Minneapolis, MN 55142
(612) 521-4662

MISSOURI
Ham Radio Center
St. Louis, MO 63132
(314) 993-6060
Henry Radio Company
Butler, MO 64730
(816) 679-3127
MidCom Electronics
St. Louis, MO 63144
(314) 961-9990
Missouri Radio Center*
Kansas City, MO 64150
(816) 741-8118

MONTANA
Conley Radio Supply
Billings, MT 59101
(406) 259-9554

NEBRASKA
Communications Center
Lincoln, NB 68508
(402) 476-7331

NEVADA
Amateur Electronic Supply*
Las Vegas, NV 89106
(702) 647-3114

NEW HAMPSHIRE
Tuft's Radio & Elect. Supply
Hudson, NH 03051
(603) 883-5005

NEW MEXICO
Electronic Module
Hobbs, NM 88240
(505) 397-3022

NEW YORK
Adirondack Radio Supply
Amsterdam, NY 12010
(518) 842-8350
Harrison Radio Corp.
Long Island, NY 11735
(516) 293-7990
Radio World
Oriskany, NY 13424
(315) 736-0184

OHIO
Amateur Electronic Supply
Wickliffe, OH 44092
(216) 585-7388
Srepco Electronics
Dayton, OH 45404
(513) 224-0871
Universal Amateur Radio, Inc.
Reynoldsburg, OH 43068
(614) 866-4267

OKLAHOMA
Derrick Electronics*
Broken Arrow, OK 74012
(918) 251-9923
Radio, Inc.
Tulsa, OK 74119
(918) 587-9123

OREGON
Portland Radio Supply
Portland, OR 97205
(503) 228-8647

PENNSYLVANIA
Hamtronics/Trevose
Trevose, PA 19047
(215) 357-1400
J.R.S. Distributors
York, PA 17404
(717) 854-8624

SOUTH CAROLINA
G.I.S.M.O. Communications
Rockhill, SC 29730
(803) 366-7157

SOUTH DAKOTA
Burghardt Amateur Center
Watertown, SD 57201
(605) 866-7314

TENNESSEE
Amateur Radio Supply of Nashville
Madison, TN 37115
(615) 868-4956
Memphis Amateur Electronics
Memphis, TN 38108
(901) 683-9125

TEXAS
Douglas Electronics
Corpus Christi, TX 78404
(512) 883-5103
Electronics Center
Dallas, TX 75201
(214) 526-2023
Hardin Electronics
Ft. Worth, TX 76112
(817) 429-9761
Madison Electronics
Houston, TX 77010
(713) 658-0268
Kennedy Associates
San Antonio, TX 78222
(512) 333-6110

WASHINGTON
A-B-C Communications
Seattle, WA 98155
(206) 364-8300
Amateur Radio Supply Co.
Seattle, WA 98108
(206) 767-3222
C-COMM*
Seattle, WA 98107
(206) 784-7337

WISCONSIN
Amateur Electronic Supply
Milwaukee, WI 53216
(414) 442-4200

*Interim Dealers

SAVE NOW!

BONUS BUCKS

This KENWOOD BONUS BUCKS coupon, when presented to any factory authorized dealer in TRIO-KENWOOD COMMUNICATIONS products, may be used as partial payment in the amount of $30.00 toward the purchase of any new KENWOOD model R-1000, TR-8400, or TR-7730 with MC-46 or basic UP/DOWN microphone, or may be used as partial payment in the amount of $15.00 toward the purchase of any new KENWOOD model TS-130S, TS-130SE, or TS-530S amateur radio product. The purchase must be made during the period March 1, through June 15, 1982. The customer must present a separate coupon (one only) for each of the listed models being purchased. Additional coupons are available from our authorized dealers. TRIO-KENWOOD assumes no responsibility for the inability of any of its dealers or of itself to deliver any specific product within the period specified in the foregoing. Offer valid only in the U.S.A. Void where taxed or prohibited by law. Resellers are not eligible to participate in this program. This coupon is a part of TRIO-KENWOOD COMMUNICATIONS "BONUS BUCKS" sales program. It has no value unless submitted in compliance with the rules of that program prior to June 15, 1982.

	/ /1982
Model Purchased	Date Purchased

Dealer Name: _____

Customer Name: _____ Call Sign: _____

Address: _____

City: _____ State/Zip: _____

Customer Signature _____

KENWOOD
TRIO-KENWOOD COMMUNICATIONS
1111 West Walnut, Compton, California 90220

73-BB/82

Good Mar. 1 through Jun. 15, 1982.

STAFF

PUBLISHER/EDITOR
Wayne Green W2NSD/1
EXECUTIVE VICE PRESIDENT
Sherry Smythe
ASSISTANT PUBLISHER/EDITOR
Jeff DeTray WB8BTH
MANAGING EDITOR
John Burnett
ASST. MANAGING EDITOR
Susan Philbrick
EDITORIAL ASSISTANTS
Nancy Noyd
Richard Phenix
Steve Jewett
CONTRIBUTING EDITORS
John Ackermann AG9V
Tim Daniel N8RK
Larry Kahaner WB2NEL
ASSISTANT TO THE PRESIDENT
Matthew Smith KA1JEI
ADMINISTRATIVE ASSISTANT
Pat Graham
ASSOCIATES
Robert Baker WB2GFE
John Edwards KI2U
Bill Gosney KE7C
Sanger Green
Dr. Marc Leavey WA3AJR
Bill Pasternak WA6ITF
Peter Stark K2OAW

PRODUCTION MANAGER/ PUBLICATIONS
Nancy Salmon
ASST. PRODUCTION MANAGER/PUBLICATIONS
Michael Murphy
ADVERTISING GRAPHICS MANAGERS
Steve Baldwin
Bruce Hedin
Jane Preston
PRODUCTION
Frances Benton
Betty Butler
Fiona Davies
Linda Drew
Sandra Dukette
Denzel Dyer
Dianne Ritson
Theresa Ostebo
Scott Philbrick
Mary Seaver
Deborah Stone
Irene Vail
Judi Wimberly
David Wozmak
PHOTOGRAPHY
Bryan Hastings
John R. Schweigert
Robert M. Villeneuve
Thomas Villeneuve
TYPESETTING
Sara Bedell
Melody Bedell
Marie Barker
Debbie Davidson
Michele Desrochers
Jennifer Fay
Anne Rocchio
Ellen Schwartz
Kelly Smith
Karen Stewart
Lisa Steiner

GENERAL MANAGER
Debra Boudreau
CONTROLLER
Peter Correia
EXECUTIVE ASSISTANT
Leatrice O'Neil
ACCOUNTING MANAGER
Knud Keller KV4GG/1
CIRCULATION MANAGER
Patricia Ferrante
CIRCULATION
Doris Day
603-924-9471
Pauline Johnstone
BULK SALES MANAGER
Ginnie Boudreau
ADVERTISING
603-924-7138
Jim Gray W1XU, Mgr.
Nancy Ciampa, Asst. Mgr.
Ross Kenyon KA1GAV
Cornelia Taylor

At 15, I was busily bootlegging on 40-meter CW with my Hallicrafters SX-19 receiver and a homemade 6L6 rig. I was pretty good at the code, but every time I'd go down to take my license exam, I'd go into a total panic and flub it. I think the only reason I ever passed was that one day I went along with a friend who was being examined. I hadn't practiced or even studied for the written test. Once we got there, since the test was free, I said what the hell and sat down.

The code came through, sounding like five words per minute. I got good copy. My buddy, who had been whipping off 15 per the night before, had an almost empty page. I got my ticket and he never did get his. Pity, for he became a well-known electronic engineer. Panic.

The ham DXing originally got me interested, but I didn't get into that aspect of it until years later. I was mostly active in my early days on 160m and 2½m. DX is relative, of course, once you get into the hobby. My contacts across town on 112 megs were as much fun as working Swaziland 30 years later.

As a jaded old-time ham, you may not find much excitement in whipping out an HT and making a contact with some friend fifty miles away, but I'll bet that a lot of youngsters would find it fantastic. Oh, they're familiar with CB. . .but it is never like this.

If CB had been around when I was a kid, would I have been side-tracked into it? Undoubtedly. Would my eventual disillusionment with CB stop me from getting into amateur radio? I don't know. . .and that *might* be some of the reason for our low level of newcomers. Still, with the entry into amateur radio now at five words per minute and the technical test totally bypassed by the Bash books, there are few barriers.

I learned the Morse code one evening while getting dressed to go to a Boy Scout meeting. I'd put it off until the last minute, as usual, and had to demonstrate my code ability at the meeting. Within one hour, I learned the letters and was doing at least five words per. I was 14 at the time.

To digress, as usual, my enthusiasm for getting rid of the Morse code test for a ham license and replacing it with a

Continued on page 121

Well. . . I Can Dream, Can't I? **by Bandel Linn K4PP**

"The Russian embassy says they're ordering the 'Woodpecker' to stop while you're on the air."

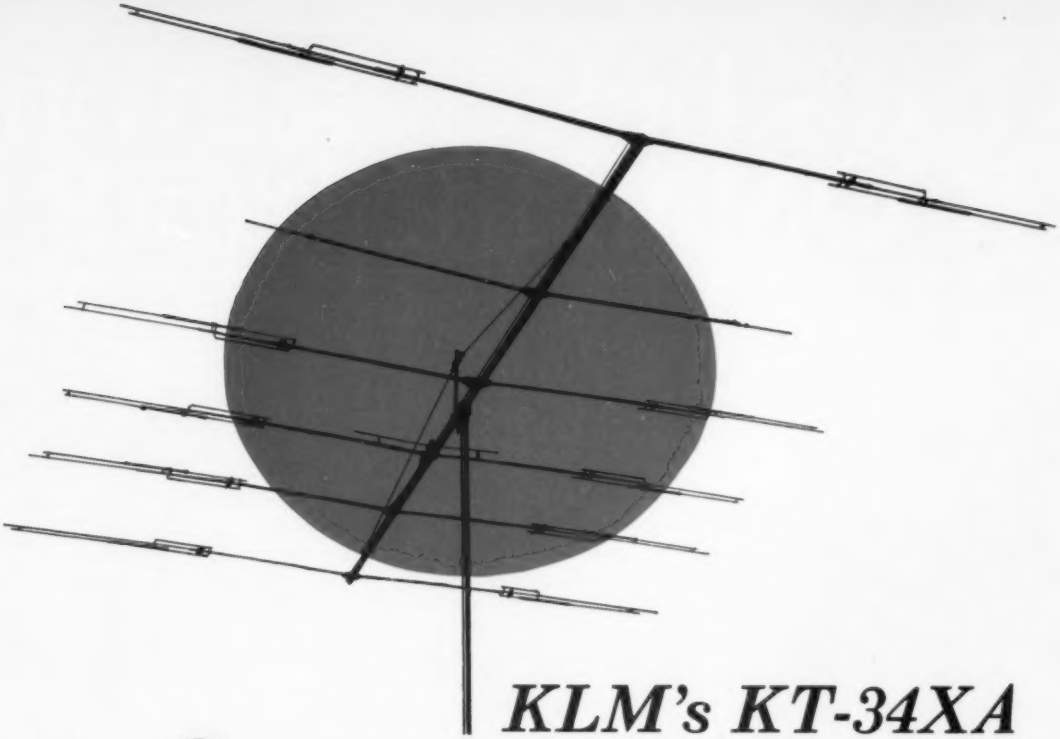

KLM's KT-34XA

Outperforms ALL commercially available tribanders and many monobanders, too!

KLM's KT-34XA TRIBANDER is the 2nd generation of a unique new series of antennas designed to provide superior **broadband** coverage on 20, 15, and 10 meters. The combination of lossless linear loading and hi-Q air capacitors enables the KT-34XA to outperform **all** commercial available tribanders and meet or exceed the performance of a conventional stacked monoband system. The lower weight and windload of a single antenna mean reduced tower and rotator requirements. Thus, overall system costs can be kept to a minimum while enjoying the best of monobander-type performance.

KLM's field proven KT-34A is the heart of the "XA" model. The boom length of the "XA", however, has been doubled, and one tri-resonant and one full size 10 meter element have been added. These changes increase the gain to **11-11.3 dBd** on 10M, **9-9.5 dBd** on 15M, and **8.5-9 dBd** on 20M. Two driven elements are used to make the KT-34XA unusually broadbanded (a concept applied to many KLM antennas). Gain is virtually flat across each band except for 10 meters which has been optimized for the DX'er, 28-29 MHz. The chart below shows the remarkable performance qualities of the KT-34XA.

KT-34XA GAIN vs. VSWR

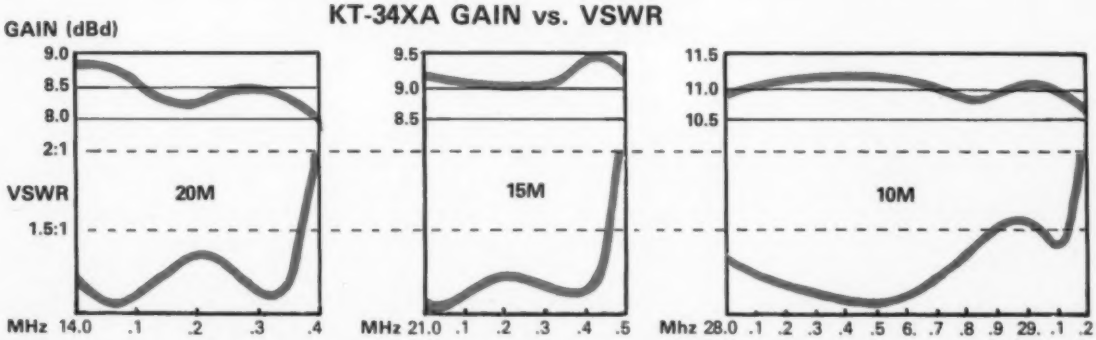

KLM

P.O. Box 816, Morgan Hill, CA 95037
(408)779-7363

What's better than one ICOM in the hand?

Meet the new ICOM 220 MHz IC-3AT. Providing full coverage of the 220 MHz band, the IC-3AT is similar in appearance and size to the popular IC-2AT. All accessories, including battery packs, chargers, microphone, etc., are completely compatible between the two series.

The IC-3AT includes a 16 button Touchtone® Pad and covers 220 to 224.99MHz both simplex and duplex operation. The IC-3AT system comes complete with IC-BP3 NiCd battery pack, AC wall charger, belt clip, "rubber duckie" antenna, wrist strap all standard at no extra cost.

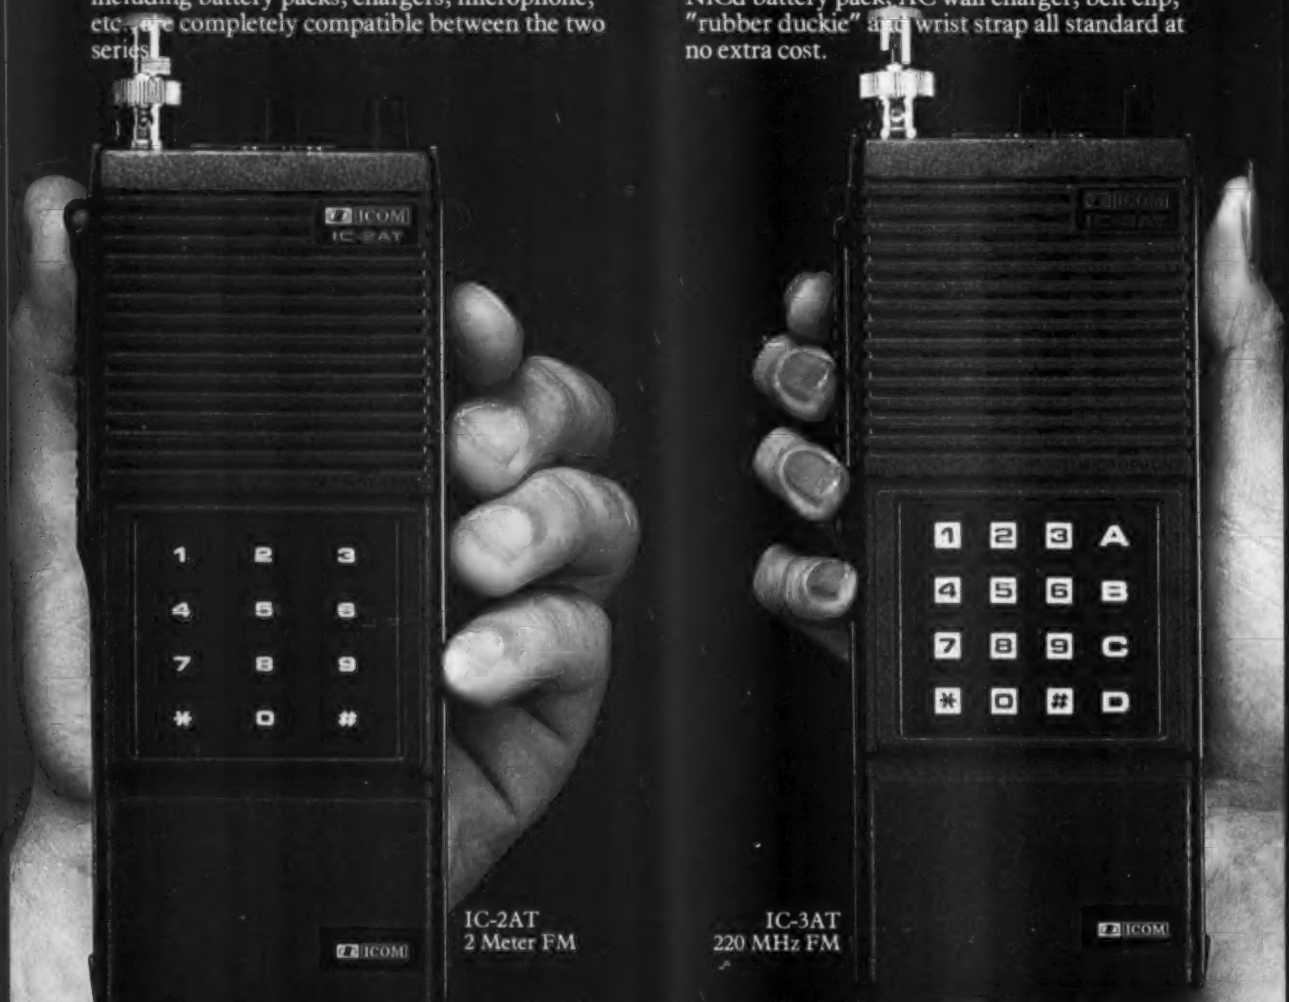

IC-2AT
2 Meter FM

IC-3AT
220 MHz FM

2112 116th Avenue N.E., Bellevue, WA 98004 / 3331 Towerwood Dr., Suite 307, Dallas TX 75234

All listed specifications are approximate and subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions

ICOM

IC-22U

ICOM VHF Mobile Performance at a Budget Price

Imagine IC-22S performance and simplicity . . . plus 800 channels . . .

Easy to Operate.

- Convenient pushbutton frequency selection
- Monitor repeater inputs at the flip of a switch
- Hi/Low power pushbutton selectible
- Touch Tone® available with optional HM8 microphone
- Convenient hookup points for sub-audible tone encoder or continuous tone controlled squelch system
- 5 KHz step (800 T/R channels standard)
- Covers the complete 144-147.995 MHz ham band

ICOM Performance.

- 5 helical resonators for outstanding selectivity
- Continuous duty rated 10 watt transmitter — rugged performance
- Excellent receiver sensitivity
- Patterned after ICOM's extremely successful and reliable IC-22S.
- APC circuit for protection of finals

Versatile.

- Easily set up for CAP/MARS use
- 8 pin mic connector
- 9 pin undedicated accessory socket
- Remotable frequency selection option (Ex-199)
- Compact size [6.2 in (W) x 2.3 in (H) x 8.6 in (D)]

ICOM

2112 - 116th Avenue NE, Bellevue WA 98004
3331 Towerwood Dr., Suite 307, Dallas, TX 75234

All stated specifications are approximate and subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions.

Tim Ahrens WA5VQK
Microcomponent Applications Engineer, Motorola
3501 Ed Bluestein Blvd.
Austin TX 78721

Build This Digital Vfo

—a microprocessor makes it simple

Ed. Note: The MC6805T2L2 microprocessor IC used in this project must be ordered directly from Motorola. Send a money order only (no checks) for $11.50, payable to Motorola, to: Tim Ahrens, Motorola, 3501 Ed Bluestein Blvd., Austin TX 78721, Attention: Mail Stop L-2787.

This article describes a microprocessor-controlled vfo which may be used as a remote vfo for existing stations or incorporated into new radio-system designs. The vfo features ten battery-backed-up memories, keypad entry of frequency, up/down scanning, a real-time clock, plus a liquid crystal display.

As a remote, the vfo tunes from 5 to 6 MHz in 100-Hz increments and is directly compatible with radios which use a 5-to-5.5-MHz internal vfo (e.g., FT-107, FT-707, etc.). If using one of these radios, only small modifications within the radio are required to allow the remote vfo to change bands at the touch of a finger!

Microprocessor Selection

The vfo is designed around Motorola's MC6805T2 microprocessor. Within this multi-function chip (now called a microcomputing unit—MCU—because of all the integrated functions on board), I/O plays a very important part. This is the portion of the MCU which does the actual communicating with switches, LEDs, bells, and whistles. The MC6805T2 MCU used in this project (we will refer to it as the "T2") has a small amount of RAM, ROM (2.5 K bytes), a timer, parallel I/O lines, and one other feature that makes it ideal in the radio environment—a built-in frequency synthesizer. A block diagram of the synthesizer is shown in Fig.1(a); Fig.1(b) is a block diagram of the entire vfo.

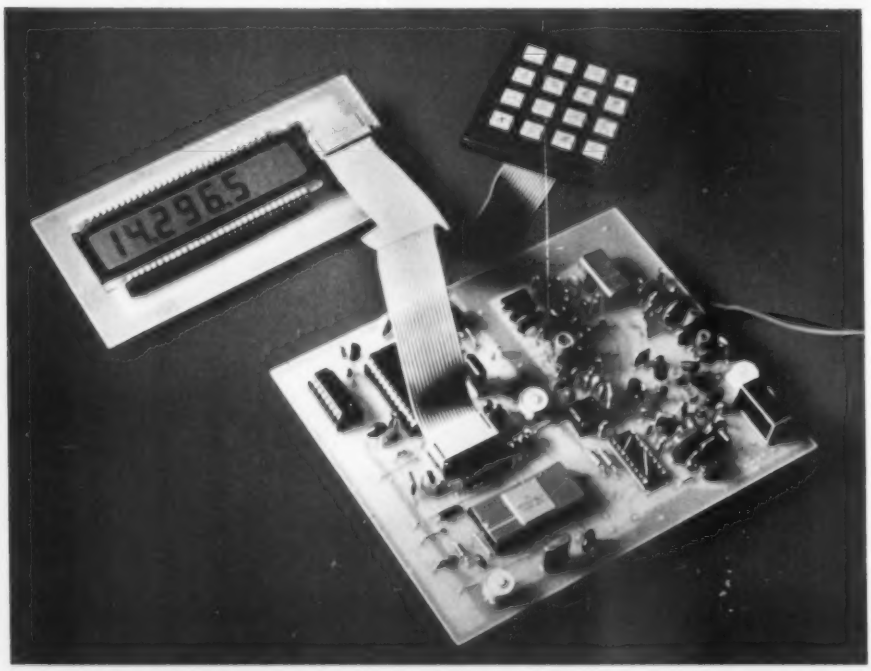

The vco signal which is fed back into the T2 may have an amplitude as low as one-half volt and be as fast as 16 MHz. With external prescaling, the vco frequency may be considerably higher. However, any external prescaling will multiply the step size by the prescaling factor.

In addition to its on-chip synthesizer, the T2 contains enough ROM to hold all the software needed for the vfo control program. In fact, the T2 with the vfo program in ROM is available from any Motorola distributor.

An alternative to the T2 is the MC68705P3 MPU. The P3 is very similar to the T2 except that it requires an external synthesizer and it contains on-board EPROM instead of ROM. The EPROM on the P3 is user-programmable, so you should use the P3 if you need a control program other than the one avail-

able in ROM on the T2. See the box for further information on programming and use of the P3.

The circuit-board layouts given in this article can be jumpered for use with either MPU. The figures and text explain where differences occur. For those who prefer not to etch their own boards, a source for boards as well as components is given in the small box.

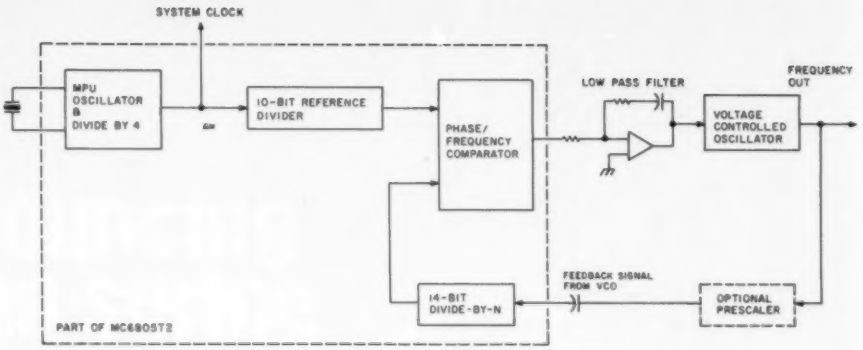

Fig. 1(a). Block diagram of synthesizer on MC6805T2 MCU chip.

Using the Vfo

Upon power-up, the MCU reads the last-entered frequency from the RAM on board a battery-backed-up MC146818 clock chip, enters it into the synthesizer, and displays it. If powering up from a "dead" system (no battery backup), garbage will be both displayed and entered into the PLL system.

After the power-up sequence is completed, numbers for a different frequency may be entered via the keyboard. When the display shows the frequency desired, depress "enter" and the PLL system will be set up. By entering the frequency in this manner, it is also stored in RAM so that if a power failure should occur, the correct frequency will be read from the battery-backed-up system and the PLL restored.

If the displayed frequency is to be stored into memory for later recall, press "memory" followed by a digit, 0-9. To retrieve a previously stored frequency, press "recall" followed by the desired digit. All of these memories have battery backup.

If you want to move up in frequency, press and hold the "up" button. If you want to go up fast, press and hold the "fast" button at the same time. The frequency will go up until it reaches XX.999.9, at which time it will roll over to XX.000.0. To make the system go down in frequency, the same procedure may be followed using the "down" key.

To set the time, press "recall" followed by "memory." At this time, the display will show EEEEEE, signifying that the time may now be entered. Enter the time in 24-hour format, and when satisfied with the display, press "enter." At this time, the data will be placed into the clock chip's registers and time-keeping will commence. When "enter" is depressed, the frequency that was on the display before setting the clock will be restored to the display. The actual PLL systems are not disturbed by entering into either this mode or the time-display mode.

To display the time with an update every second, press "recall" followed by "enter." You may exit this mode by pressing any key, which will return the display to the previous frequency.

As you can see, the combination of the MC6805T2 MCU and the MC146818 clock chip provides the radio designer with capabilities that far surpass the previously acceptable methods of frequency control. The 6818 may be omitted, but the clock feature, stored frequencies, and the battery backup of them will also be deleted.

Vfo Circuit Design

The rf circuitry I used is given in Fig. 2, while the MCU and its peripherals are shown in Fig. 3.

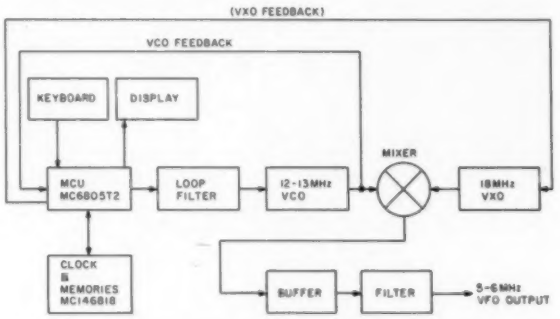

Fig. 1(b). Block diagram of entire microprocessor-controlled vfo.

As the MCU's minimum step is 1 kHz, some method of refinement must be incorporated because 1 kHz is not adequate resolution in the HF bands. By using four of the I/O lines from the MCU for a voltage-summing network, 100-Hz stepping increments may be realized. The output of the summing network is used as an "offset" voltage to shift the frequency of the vfo. Because the frequency will be locked (basically to itself), changing the main vco frequency would achieve nothing. There are, however, two methods of

PARTS AVAILABILITY

The varactor diodes (D2 and D3) and most of the integrated circuits used in this project are Motorola devices and are available from Motorola distributors. In many parts of the country, Hamilton-Avnet Electronics is a source for these parts. Excluding the LCD unit, a set of ICs for this project should cost between $45 and $70, depending on which microprocessor you select for your version.

The MD108 double-balanced mixer is available for $12 postpaid from ANZAC, 180 Cambridge St., Burlington MA 01803. A good selection of coils and forms can be found at RADIOKIT, Box 411S, Greenville NH 03048.

Parts, as well as circuit boards, are also available from Conversion Dynamics, 2218 Old Middlefield Way, Suite N, Mountain View CA 94043. Their version uses a double-sided PC board and an LED rather than LCD frequency display. Write to them for more details.

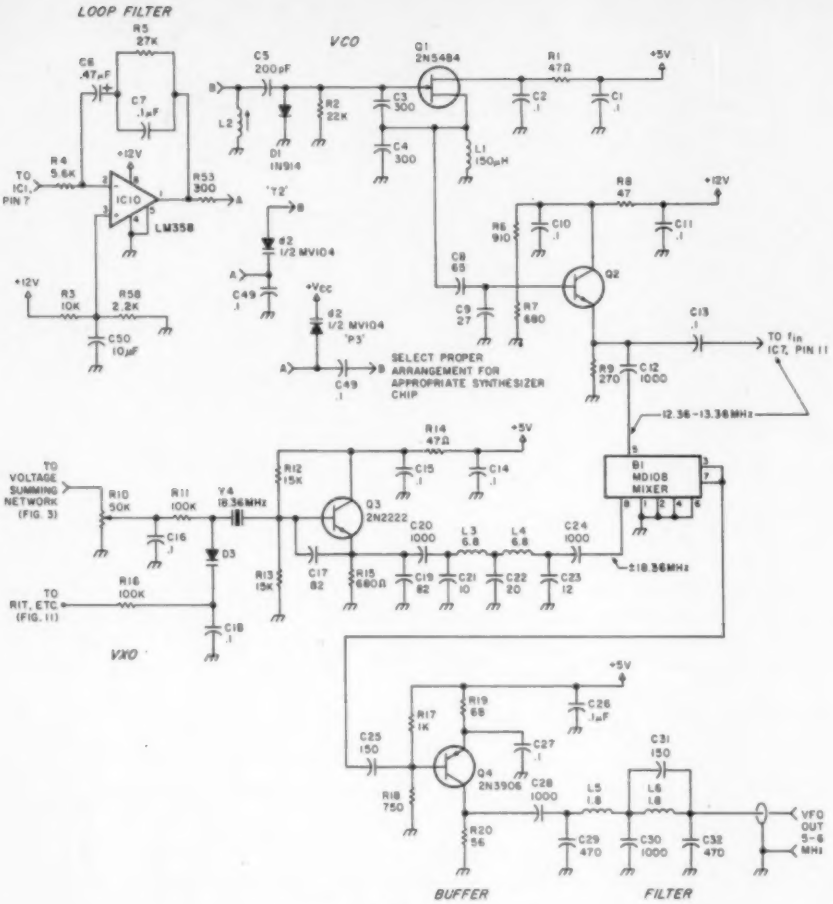

Fig. 2. Rf circuitry of vfo.

changing the frequency which would not affect the PLL system itself: Shift the reference frequency, or use an auxiliary variable crystal oscillator (vxo) and then mix the two frequencies together.

The first method was tried initially, but due to the low frequency of the crystal, I could not pull the oscillator far enough off frequency to provide the 100-Hz shift and still have provisions for RIT. So the second method, of an auxiliary vxo, was tried. The main vco tunes from 12.36 to 13.36 MHz and is then mixed with 18.36 MHz from the vxo to provide the necessary 5-to-6-MHz signal. This method of shifting through 100-Hz steps may seem a bit crude, but several commercial transceivers use this method. In fact, Icom's IC-730 uses this method to generate 10-Hz steps! Fig. 4, a spectrum analyzer photo, shows the actual vfo output.

The 18.360-MHz vxo crystal (Y4) was chosen because I had one; it is a 146.88-MHz transmit crystal for an HT-144. Either of two crystals may be used in the oscillator. An 18.360-MHz or an 18.860-MHz crystal may be selected by a jumper and a pullup/pulldown resistor on pin 27 of IC1 (see Fig. 3). The vco must be adjusted for the crystal you choose.

If a different frequency range is to be covered by the vfo, the frequency of the vxo crystal must be changed, and appropriate modifications in the filters should be made. From this, it may be seen that almost any frequency may be generated from the vfo by simply changing the vxo crystal.

The MCU and Clock Circuit

A version of the MC6805T2 is available from Motorola which already contains in ROM the program necessary to function as a vfo. This part is called an MC6805T2L2. The L2 signifies a specific program within a ceramic part, in this case, the vfo software. The MCU is used to gather data from the keyboard and execute any function which is "called up." The lines used for I/O are represented by PA0-PA7, PB0-PB7, and PC0-PC2. Port A is used for both the keyboard and interface to the MC146818 clock chip. In this application, the clock chip is battery-backed-up, and when powered down draws only 300-400 microamperes from a four-and-one-half-volt source.

The B port is used to control the four bits of the voltage-summing network plus the read/write and control lines of the clock. The C port is used to control the clock and data lines of the liquid crystal display (LCD). Only two crystals are required in this part of the vfo—a 4.096 MHz for the MCU, and a 4.194 MHz for the clock chip. These frequencies are divided down by their respective hosts for internal timing.

All of the peripherals with the exception of the 6818 are serial devices. This means that the digital data which goes to each part requires only two lines, a data line and a clock line. In the MCU environment, I/O lines are at a premium; that is why data lines are common to all parts and only the clock or enable lines are separated from the rest.

The Display

The display portion of the system uses the MC145000 multiplexed LCD driver and an 8-digit LCD, although only six digits are used.

The MC145000 requires a total of four lines—power, ground, clock, and data. This means that the display may be located away from the main PC board. This makes for a lot easier construction of the total project! Since this is digital data on two of the lines, use no more than about a foot of cable. Current consumption is quite low with this CMOS device—about 75 microamperes. As data is shifted into the 145000, every 8 bits will shift over one character from left to right. Even if only the right-hand-most digit is to be

The antenna specialists co. introduces the DURA-FLEX™ shock mount. It does everything a steel spring will do—while solving two special problems.

1. It completely eliminates spring-generated RF noise in duplex radio systems.
2. It improves radiation patterns and prevents antenna damage in rough environments by drastically dampening whip vibration.

DURA-FLEX.™ You have to flex it to believe it.

the antenna specialists co. we design solutions.

the antenna specialists co.
a member of **The Allen Group Inc.**
12435 Euclid Ave., Cleveland, OH 44106 ⌐63
Canada: A. C. Simmonds & Sons, Ltd.

⌐See List of Advertisers on page 114

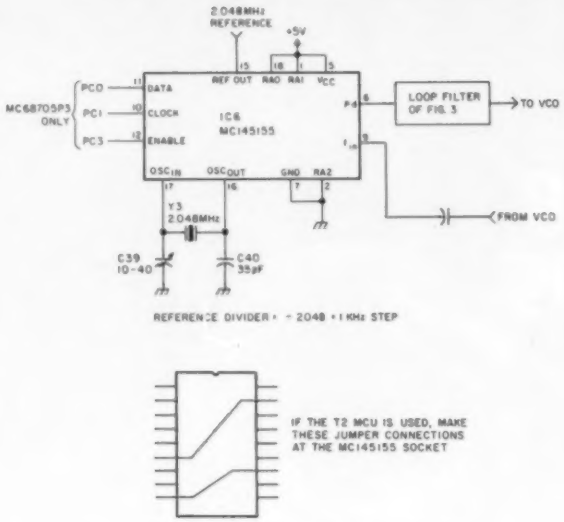

Fig. A. Using the MC145155 CMOS synthesizer.

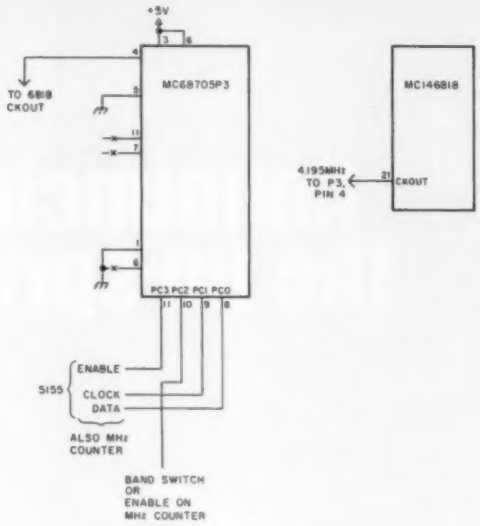

Fig. B. 6805 T2 vs. P3 differences.

Using the P3

Although designed for the MC6805T2, the vfo software was given the capability of using the MC68705P3 as a host MCU. This MCU is identical to the T2 with the following exceptions: • The P3 does not contain a PLL. • The P3 is an EPROM-type part which programs itself.

In the early stages of the design, a T2 was not available and a "simulation" was made by using a P3 and an MC145155 CMOS synthesizer. If changes to the program are desired, you may use a P3 plus an MC145155 CMOS synthesizer to simulate the T2, as shown in Figs. A and B. This allows you to use the same basic core of the program and add enhancements that might be useful.

The actual software listing for the system is available from me on receipt of a large SASE plus $3.00 to cover copying costs. It may be entered into an MCM2716 2K by 8 EPROM for programming of the MC68705P3. Fig. C is a schematic for the programmer.

The MC68705P3 MCU has the capability of programming itself. By adding only one additional part (MC14040B), the P3 can read data from a 2K by 8 EPROM and program itself from it. Two LEDs are used, which signify that the device has been 1-programmed, and 2-verified.

Because the hardware required to program the P3 is so small, even the casual amateur/hobbyist may build a programmer to take advantage of the MCU's capabilities.

Either the T2 or the P3 with the MC145155 can be used with the circuit board presented in this article. If the T2 is used, the MC145155 is not needed and two jumper connections should be made at the MC145155 socket. See Fig. A.

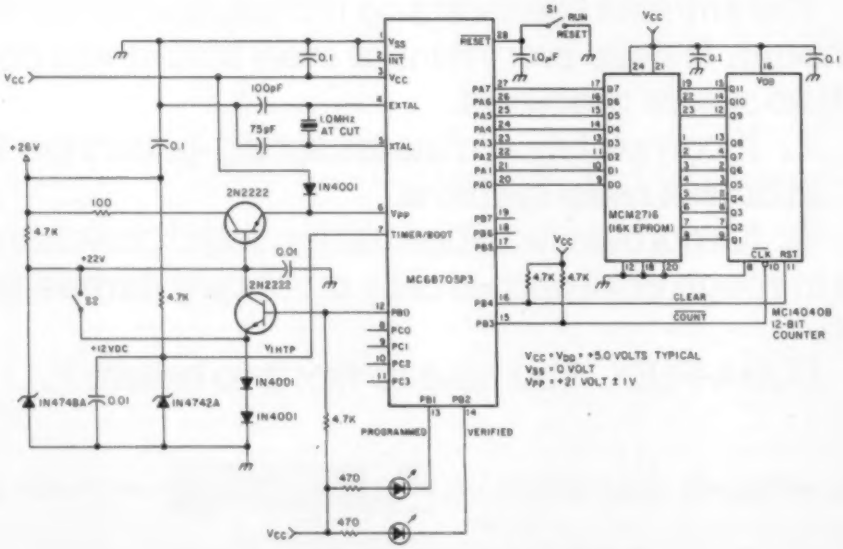

Fig. C. Programmer for the P3.

Reader Service for facing page ~81→

Is this new KDK FM2030 the best 2 meter FM radio in the world?

"...best...in the world?"

That's a pretty strong claim considering the competition.

Let's look at some of the features . . .

- KDK continues the tradition of being the ultimate in VHF FM mobile operations. We make maximum use of multiple function, multiple shaft controls and only three sets of knobs are located on the front panel. Still many new features have been added, such as digital RIT, reverse button, memory channel readout number and more!
- The new KDK 4 bit microprocessor chip is an in-house developed software which makes all these new features possible. Plug in modules are used for CTCSS tone and diode matrix duplexing.
- We gave it a very heavy textured paint finish on the case and mounting bracket that is highly resistant to scratching! No more micro-thin paint finishes!
- Modern styled front panel with dials intelligently arranged so you can best utilize the multi-function, easy to handle controls.
- Good audio with the famous KDK audio output capability of 1.5 watts . . . you can't blow out our audio IC!
- RF power is a good, clean no spurious signal of 25 watts on high and 5 watts (adjustable) on low.
- Frequency coverage 143.005 - 148.995 mhz. S/N better than 35 db at 1 uv input. Better than .2 uv at 12 db SINAD. Squelch sensitivity better than .15 uv. Bandwidth at –6db: ±6khz, at –60db: ±16khz. Image ratio better than 70db. Double superhetrodyne. Transmitter uses variable reactance frequency modulation with maximum deviation set at ±5khz.
- Nicads for memory retention built in, nothing extra to buy. Disconnect the FM2030 from the power source and the memories remain!

INTRODUCTORY PRICE!
Includes Tone Pad Microphone
and all accessories. Shipping: $5.00 eastern U.S.A. $7.50 western U.S.A.

$309

- Easy to use mobile mount with instant disconnect knobs for fast, simple removal. DC Cable and mounting hardware, spare fuse, external speaker plug and complete simplified instruction book includes circuit diagrams and even complete alignment instructions! No extras to purchase!
- Control functions: Select memories, show memory channel number, or select memories and show frequency of channel, or dial frequencies with two speed selectable control. Instant choice of either 5 or 100 hz tuning steps. Band scan or frequency scan selectable.
- Frequency shown in 5 bright LED digits. LED indicator shows when signal is received (unsquelched), LED indicator shows transmit.
- Modern LED bar meter shows signal strength of received signal and on transmit shows relative output power.
- Microphone includes tone pad, and up and down buttons to change dial frequency or memory channels.
- A standard microphone with up-down buttons only is available separately.
- The FM 2030 is basically as easy to use as a crystal receiver with rotary switch frequency selection for full "eyes-on-the-road" mobile operation.
- And, in case we forgot to mention it, we retained our good point-to-point wiring and printed circuit boards and eliminated troublesome relays and those pesky internal plugs that can give trouble.
- Smaller case size: 55mm (2 3/16") high, 162mm (6 3/8") wide, 182mm (7 3/16") deep.

NOW YOU HAVE JUST SOME OF THE FEATURES . . . IT'S UP TO YOU TO DECIDE!

Write for brochure – Dealer inquiries invited!
Warranty information available from your dealer or direct.
Company reserves the right to change specifications without notice.
Exclusive USA, Central and South American Distributor
Mail Order – COD – Bank Cards

ORDER NOW DIRECT
CALL TOLL FREE
800-251-4141
This number for ORDERS ONLY!

ORDER DIRECT or at your dealer!
DISTRIBUTED BY:

KDK DISTRIBUTING CO., INC.
617 SOUTH GALLATIN ROAD – MADISON, TN 37115 – PHONE (615) 865-7949 – TELEX 80-8327

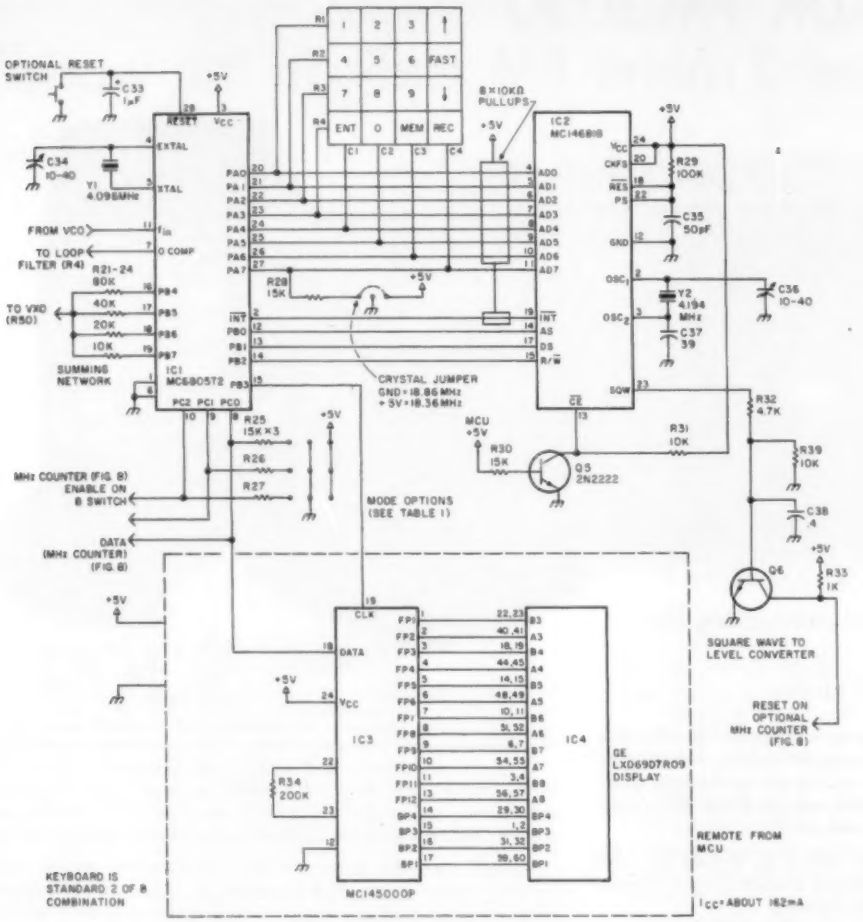

Fig. 3. MCU and peripherals.



Displayed Digit	Display Format Hex Code
0	D7
1	06
2	E3
3	A7
4	36
5	B5
6	F5
7	07
8	F7
9	B7
A	77
b	F4
C	D1
d	E6
E	F1
F	71
P	73
Y	B6
H	76
U	D6
L	D0
blank	00
— (dash)	20
= (equal)	A0
n	64
r	60
°(degrees)	33

Note: A decimal point can be added to all but the right-most display digit by setting b3 [segment (3)] to a 1.

Fig. 5. Display codes of LCD readout.

changed, all 6 digits must be present to the 145000 (48 bits worth). Fig. 5 is a chart which relates bits to digit segments.

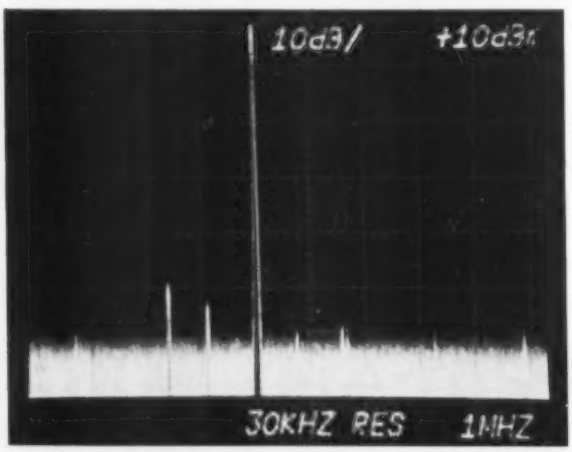

Fig. 4. Vfo output displayed on spectrum analyzer.

The Real-Time Clock

The MC146818 is a new device which not only has a real-time clock in it, but also contains 50 bytes of CMOS RAM. This makes the device an excellent choice, since data in the RAM may easily be saved in a power-down condition.

The 6818 has a clock generation circuit on chip which requires only a crystal, resistor, and two small capacitors to generate not only the time clock source, but also a clock signal for the rest of the system if desired. If the crystal mode is not chosen, the 6818 may be driven with an external frequency of 4.195 MHz, 1.048 MHz, or 32.768 kHz. An internal register tells the 6818 which frequency it is on. I have found that the 6818 draws less power when operating at the lowest frequency—32.768 kHz. In fact, by using an MC14069 inverter as a crystal oscillator at 32.768 kHz, less power is used than by using a 4.194-MHz crystal on the 6818! As with most parts of this type, the faster the clock, the more current required.

The MC146818 may be set up in a 12/24-hour type mode, plus alarms which may be set to interrupt at any time, including every hour, minute, or second. As shown in Fig. 6, there are 14 registers required to set up this data, and the entire memory map looks like 64 RAM locations.

Although the MC146818

MADISON
Electronics Supply

YAESU FT-ONE

LIST $2995.00

- three selectivity positions for CW (two for FSK!) using optional filters.
- 73 MHz first IF
- 0.3 uV sensitivity
- full break in
- Curtis 8044 keyer available as option
- front panel keyboard
- ten VFO's
- one year factory warranty

DRAKE

TR7A

Continuous Coverage Reception— no gaps—no range crystals required Amateur Band transmission, including capability for MARS, Embassy, Government, and future band expansions

1695.00

ICOM IC-720A

LIST	Madison's Price
$1498 w/AC	$1298 w/AC

ICOM'S top of the line - 9 band HF transceiver, general coverage receiver - 0.1 MHz to 30 MHz, 12 VDC operation (compatible with PS15 power supply). 2 VFO's built in.

COLLINS KWM 380

LIST	$3849.00
Madison's Price	$2795.00

ANNOUNCING THE NEW

KENWOOD TS930S Call for Quote

- 160-10 Meters, with 150kHz - 30 MHz General Coverage Receiver, quadruple conversion, digital PLL synthesized circuit
- All Solid State.
- Power input rated at 250W PEP on SSB, 250W DC on CW, 140W DC on FSK, and 80W DC on AM
- Automatic Antenna Tuner, Built-In.
- CW Full Break-In.
- Dual Digital VFO's
- Eight Memory Channels.
- Dual Mode Noise Blanker ("Pulse" or "Woodpecker").
- SSB IF Slope Tuning.
- One Year Warranty.

DONS CORNER

My spy at the Japanese factories, Tang In Stead, is back on my good side. If you have followed his doings, you will recall that he leaked the info on the new Kenwood TS-840s three months ago. Well take those three months, which is 90 days, add that to the number 840, and presto, the Kenwood TS930s. He was RIGHT! Just premature. . .but isn't that what spies are for? Tang has started rumblings about the new Icom HF rig that is about to debut. More on that next month.

Antennas, those things that you stick up on the roof or tower and then forget about, are evolving into new shapes. If you haven't checked yours recently, get up there and inspect the connectors, traps, guys, and joints. That next DX pile-up is the wrong time to discover the creeping crud. What with the new verticals and compact beams, there is no reason to use wire as your primary radiator. Call us and ask what the best alternative is for your set-up.

If you and the clan are going on a vacation, don't neglect the equipment you are taking along. Consider an amplifier, extra batteries, appropriate mobile antennas, power cords, scanning or DTMF mikes, mobile chargers, and so on. Think about how the rigs will be used and be prepared.

See you next month!

BELDEN

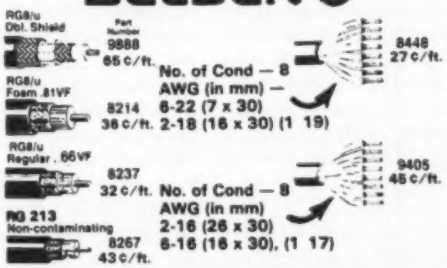

Belden Mini RG-8 (9258)-19¢/ft.

ANTENNAS

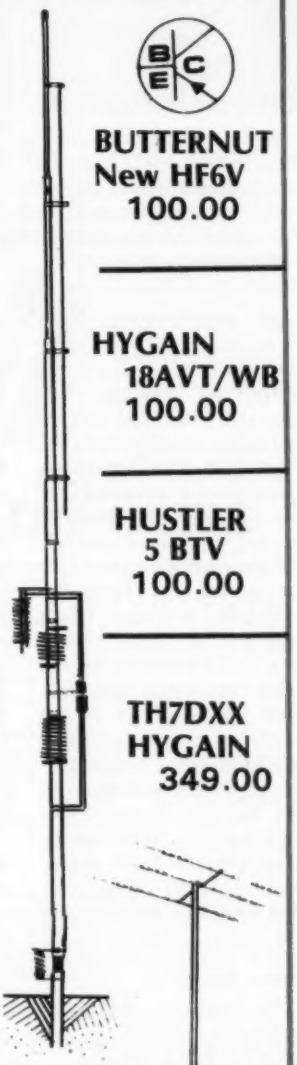

BUTTERNUT
New HF6V
100.00

HYGAIN
18AVT/WB
100.00

HUSTLER
5 BTV
100.00

TH7DXX
HYGAIN
349.00

cushcraft
A3-169.00
A4-209.00

713-658-0268 * CALL FOR QUOTES

1508 McKINNEY HOUSTON, TEXAS 77010

See List of Advertisers on page 114

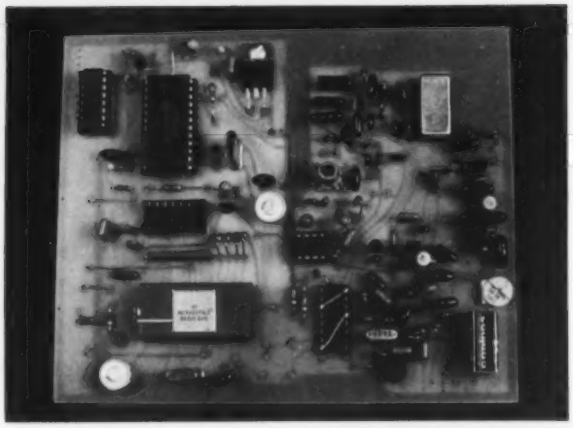

Main circuit board, using the MC6805T2L2 MPU. If the alternate "P3" MPU is used, then the socket with jumpers at lower center would be replaced with an MC145155P synthesizer chip. The empty socket at left is for the plug-in cable to the keypad. At upper right is a metal can containing the double-balanced mixer.

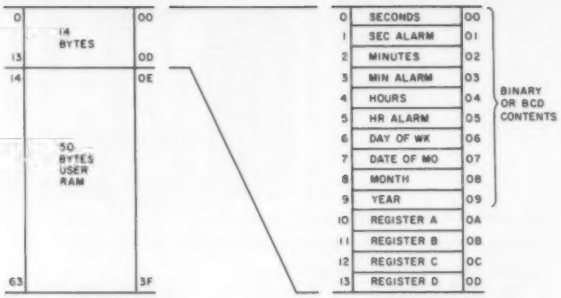

Fig. 6. Registers of the MC146818 clock chip.

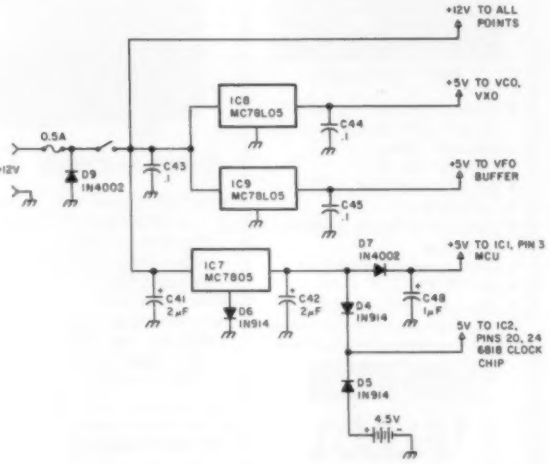

Fig. 7. Power supply. The regulated 12 V dc which drives this supply can often be derived from your transceiver. Otherwise, a simple 12-V-dc, 1-A source should be constructed.

clock chip is not designed to have any I/O pins, there is one way in which a single output bit may be "constructed." The SQW pin is a software-programmable clock output pin whose frequency is a derivative of the 6818's clock. The internal register which controls the frequency of the SQW pin can not only change the frequency of the pin, but it may also turn it off. By setting the frequency of the SQW to some relatively high frequency (it is not really that important) and providing some external filtering, when the clock is on, the output of the filter represents a "one" condition, and when off, represents a "zero" condition! This provides an extra I/O pin.

Power Supply

To supply the MC146818 with voltage both when the main system is off and on, there need to be a few smarts involved. See Fig. 7. The trick required is to use D6 to initially raise the 5 volts from IC7 one diode drop higher (.7 V), then drop the supply voltage (Vcc) to both MCU and 6818 by separate diodes (D4 and D7). This ensures that both parts are operating at basically the same voltage. For battery-backup operation, D5 is inserted from the plus lead of the battery to pin 20 of the 6818. This isolates the batteries from the rest of the system and doesn't allow any current to flow back into them when the main Vcc is on. If you are using nicads, a resistor of appropriate value could replace the diode to allow charging during on time. The value of this resistor is of little consequence to the 6818 when the main power is off because the current consumption of the 6818 is so low.

In addition to the voltage differential, there is another consideration regarding the chip enable (CE) line of the 6818. When the system is powered down (main power), the CE line of the 6818 should be brought high to ensure that the part is deselected. This is easily accomplished by using a transistor (Q5 in Fig. 3) in the classical inverter style. The base is tied to the MCU Vcc (through an appropriate resistor), and the collector resistor is tied to the 6818 Vcc. When the system is on, the collector is low, enabling the 6818, but it goes high when the system gets turned off.

The Keyboard

Because I/O lines are so valuable, each one commonly is given more than one function. Of course, every effort has been made to keep the number of lines required to a minimum (by using serial-type devices), but there are instances where large numbers of I/O pins are required. For instance, the 4×4 keypad requires eight lines just to decode the proper key. Yes, a two-to-four decoder could have been placed external to the MCU which would free up two additional lines, but it also would have required an external device to perform that function. The system designer must make the decision here. In this

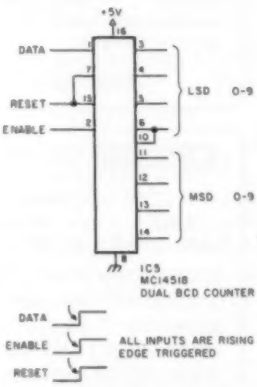

Fig. 8. MHz-counter option.

case, I chose to "multiplex" the data lines for the clock on the same I/O lines as those required for the keyboard.

The way the software works, immediately after a key is released, e.g., the "enter" key, the data direc-

DOUBLE BAZOOKA COAXIAL ANTENNA

- Injection Molded Plastic Fittings for Strength, Durability and Weather-proofing.
- Broad Banded Low VSWR
- No Tuner or Balun Required
- Feed With Any Length 50 Ohm Coax
- Power Handling Capacity - Two Kw
- Not A Kit - Ready For Use - Made in USA
- Steel Eyeletts For Installation and SO-239 Fitting Are Molded Into Antenna

80 or 40 Meter.....49.95 ea.
20, 15, or 10 Meter.....44.95 ea.

power gain systems
1007 Cypress
West Monroe, La. 71291
↵96

☐ Payment enclosed $_____
☐ VISA ☐ MC
Card no._____Exp. date_____
Signature_____
Name_____
Address_____
City_____State___Zip_____

HAVE RTTY—WILL TRAVEL

Yes, now you can take it with you! The new **HAL CWR-6850 Telereader** is the smallest RTTY and CW terminal available, complete with CRT display screen. Stay active with your RTTY and CW friends even while traveling. Some of the outstanding features of the CWR-6850 are:

- **Send and receive ASCII, Baudot, and Morse code**
- **RTTY and Morse demodulators are built-in**
- **RTTY speeds of 45, 50, 57, 74, 110, and 300 baud**
- **High or Low RTTY tones**
- **Send and receive CW at 3 to 40 wpm**
- **Built-in 5 inch green CRT display**
- **Four page video screen display**
- **Six programmable HERE IS messages**
- **Pretype up to 15 lines of text**
- **External keyboard included**
- **Runs on +12 VDC @ 1.7 Amperes**
- **Small size (12.75" × 5" × 11.5")**

Write or call for more details. See the CWR-6850 at your favorite HAL dealer.

HAL COMMUNICATIONS CORP.
BOX 365
URBANA, ILLINOIS 61801 217-367-7373
↵345

HI-Q BALUN

- For dipoles, yagis, inverted vees & doublets
- Replaces center insulator
- Puts power in antenna
- Broadbanded 3-40 MHz
- Small, lightweight and weatherproof
- 1:1 Impedance ratio
- For full legal power and more
- Helps eliminate TVI
- With SO 239 connector

only $12.95

HI-Q ANTENNA CENTER INSULATOR

Small, rugged, lightweight, weatherproof
Replaces center insulator
Handles full legal power and more
$6.95 With SO 239 connector

HI-Q ANTENNA END INSULATORS

Patent No. 4,041,350

Rugged, lightweight, injection molded of top quality material, with high dielectric qualities and excellent weatherability. End insulators are constructed in a spiral unending fashion to permit winding of loading coils or partial winding for tuned traps.

May be used for
- Guy wire strain insulators
- End or center insulators for antennas
- Construction of antenna loading coils or multiband traps

$4.95

DIPOLES

MODEL	BANDS	LENGTH	PRICE WITH HI-Q BALUN	WITH HI-Q CENTER INSULATOR
Dipoles				
D-80	80,75	130	$31.95	$27.95
D-40	40,15	66	28.95	24.95
D-20	20	33	27.95	23.95
D-15	15	22	26.95	22.95
D-10	10	16	25.95	21.95
Shortened dipoles				
SD-80	80,75	90	35.95	31.95
SD-40	40	45	32.95	28.95
Parallel dipoles				
PD-8010	80,40,20,10,15	130	43.95	39.95
PD-4010	40,20,10,15	66	37.95	33.95
PD-8040	80,40,15	130	39.95	35.95
PD-4020	40,20,15	66	33.95	29.95
Dipole shortaners - only, same as included in SD models				
S-80	80,75		$11.95 pr	
S-40	40		$10.95 pr	

All antennas are complete with a HI-Q Balun or HI-Q Antenna Center insulator, No. 14 antenna wire, ceramic insulators, 100 nylon antenna support rope (SD models only 50) rated for full legal power. Antennas may be used as an inverted V and may also be used by MARS or SWLs.

Antenna accessories—available with antenna orders

Nylon guy rope 450# test 100 feet	$4.49
Ceramic (Dogbone Type) antenna insulators	$1.50 pr
SO-239 coax connectors	.55

All prices are postpaid USA 48
Available at your favorite dealer or order direct from

Van Gorden Engineering Dealer Inquiries Invited

BOX 21305 B, SOUTH EUCLID, OHIO 44121

↵See List of Advertisers on page 114

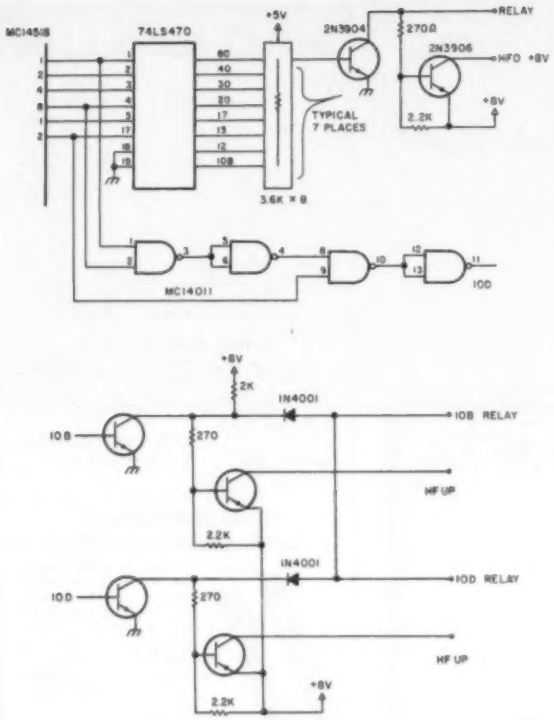

Fig. 9(a). This circuit provides automatic bandswitching for the FT-707. Alternative connections may be required for the FT-107 or other radios. Be sure to place the FT-707 bandswitch in the unused position when this hardware is connected.

ADDRESS	DATA
$03	$80
$07	$40
$10	$20
$14	$10
$18	$08
$21	$04
$24	$02
$28	$01
$29	$03

All other locations are $00.
$ denotes hexadecimal notation.

Fig. 9(b). This program must be burned into the 74LS470 PROM of bandswitching circuit.

tion registers in the MCU are set up to talk to the 6818. Data is then transferred to the 6818's RAM. As soon as the data transfer is complete, the MCU is reconfigured for inputs from the keyboard. The actual transfer time is so short (< 300 μs) that no matter how hard the operator tries, he cannot hit another key before the data transfer is complete. While in the time-display mode, once every second an interrupt is generated. As soon as the MCU recognizes this interrupt, the MCU reads the time from the 6818 and displays it. As soon as that data is read, the MCU is reconfigured for a keyboard entry. The rest of the one-second period, the MCU is waiting for a button to be pushed. The amount of time required to read the time (< 50 μs) is the only time that depressing a key could possibly disturb the actual data read. But since any key depression would be greater than 20 ms, the incorrect frequency would be displayed, then immediately jump out of the time-display mode and redisplay the last frequency.

Band and Mode Switching

For the vfo to be used conveniently with a multi-band transceiver, some method must be provided to tell the external PLL system which MHz segment it is on. This function is implemented as follows.

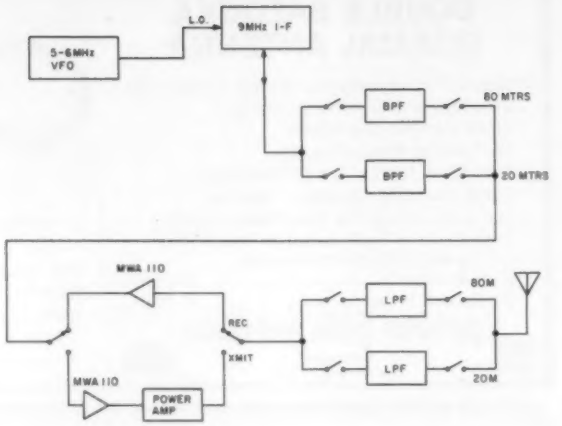

Fig. 10. Block diagram of a complete single-conversion transceiver controlled by the microprocessor vfo.

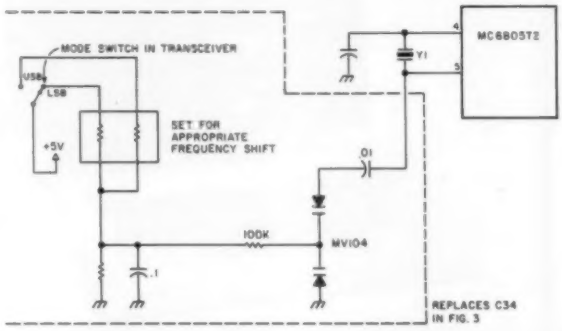

Fig. 11. Mode switching for rigs which display actual operating frequency (not carrier frequency).

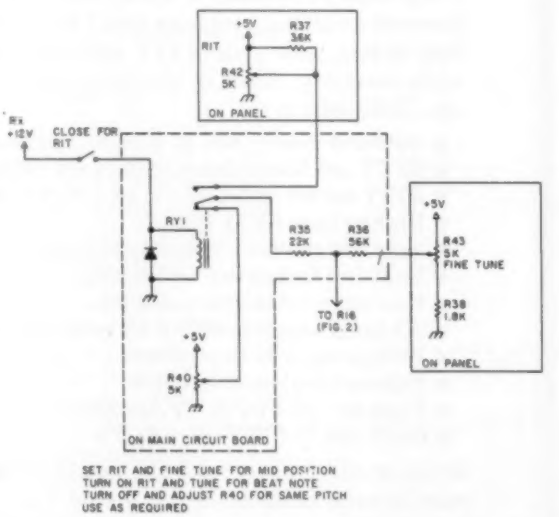

Fig. 12. Adding RIT and fine tuning to the vfo. Most of these components mount on the main circuit board.

Whenever the frequency is sent to the on-board synthesizer, the two most significant digits (MHz) are sent serially to the data pin (PC0). If operating on 5 MHz, the sequence of events is: (1) set up the 5-6-MHz synthesizer, (2) pulse the SQW pin of the 6818 (resets the external counter), (3) set the clock enable pin (allows clock line to increment counter), (4) send out five pulses (for 5 MHz), (5) clear the clock enable pin, and (6) continue with program.

The circuit for a simple decoding scheme using the MC14518 dual-BCD counter is shown in Fig. 8. One use for the outputs from the counter is to provide automatic bandswitching.

References were made earlier to bandswitching on an FT-107 or FT-707. Fig. 9(a) shows how it may be accomplished. By taking the outputs of the binary decoder of Fig. 8 and running them into a 74LS470 Programmable Read Only Memory (PROM), certain combinations of frequencies may be turned into levels which may drive circuitry to change bands. The PROM must be programmed as per Fig. 9(b). Unlike older transceivers, the FT-107 and 707 do not use a bandswitch which runs the entire depth of the rig. The actual switch is only a double-pole type which switches relays within the radio. By placing this switch in an unused position and adding appropriate drivers, the remote vfo can switch bands, too!

I originally used this vfo with a simple home-brew transceiver that operates on both 80 and 20 meters, with no external heterodyne oscillator. This single-conversion radio provides an excellent "simple" radio, with the T2 controlling everything, including the bandswitching of the filters. Fig. 10 shows a block diagram of this radio.

The vfo provides the actual frequency selection, with the display presenting the operator with the carrier frequency. If you are upgrading a standard radio such as Heath or Collins where there was an analog method of readout, there will be no problem in conversion. But if you are already using a digital readout that displays not the carrier frequency, but the actual "talk frequency," then an additional modification must be made to the system. This mod will shift the reference oscillator by 1.5 kHz, either up or

MODE (PC2,1,0)	DISPLAY	VFO FREQUENCY	PURPOSE
000	3.0000	5.0000	INVERTED 80-20M
	3.9999	5.9999	AUTO REV ON 20
	14.0000	5.9999	MHZ NOT SENT
	14.9999	5.0000	PC2 1 = 80
			0 = 20
001	XX.0000	5.5000	FT107 MODE
	XX.5000	5.0000	MHZ SENT
010	XX.0000	5.9999	INVERTED
	XX.9999	5.0000	MHZ SENT
101	XX.0000	5.0000	NORMAL
	XX.9999	5.9999	MHZ SENT
110	3.0000	5.9999	80-20M
	3.9999	5.0000	AUTO REV ON 20
	14.0000	5.0000	MHZ NOT SENT
	14.9999	5.9999	PC2 1 = 80
			0 = 20

Table 1. Vfo options. MCU I/O pins PC0, PC1, and PC2 are strapped to 1 (+5 V) or 0 (ground), depending on the vfo mode you select.

Parts List

Component	Value (Ω)	Quantity
R1,8,14	47	3
R2,35	22k	2
R11,16,29	100k	3
R4	5.6k	1
R6	910	1
R7,15	680	2
R9	270	1
R10	50k pot (small)	1
R12,13,15,26, 27,28,30	15k	7
R17,R33	1k	2
R18	750	1
R19	68	1
R20	56	1
R21	82k	1
R22	39k	1
R23	20k	1
R24,31,39, 44-51,3	10k	12
R32	4.7k	1
R34	200k	1
R36	56k	1
R37	3.6k	1
R38	1.8k	1
R40,41,42	5k pot (2 panel, 1 PCB)	3
R5	27k	1
R43	10 meg	1
R53	300	1
R58	2.2k	1
L1	150 μH	1
L2	1-2 μH (13 turns #28 ¼" form)	1
L3,4	6.8 μH	2
L5,6	1.8 μH	2
B1	MD108 double-balanced mixer	1
Y1	4.096 MHz	1
Y2	4.194 MHz	1
Y3	*2.048 MHz	1
Y4	18.36 or 18.86 MHz	
RY1	Relay (RIT)	1
C1,2,7,10,11,13,43, 44,14,15,16,18,26, 27,45,46,49	.1 μF	17
C3,C4	300 pF	2
C5	200 pF	1
C6	.47 μF	1
C8	65 pF	1
C9	91 pF	1
C12,20,24,28,30	1000 pF	5
C17,19	82 pF	2
C21	10 pF	1
C22	20 pF	1
C23	12 pF	1
C25,31	150 pF	2
C29,32	470 pF	2
C33,47,48	1 μF	3
C34,36	10-40 var.	2
C35	50 pF	1
C37	39 pF	1
C38	.47 μF	1
C39	*10-40 pF	1
C40	*39 pF	1
C41,42	2 μF	2
C50	10 μF	1
Q1	2N5484	1
Q2,3,5,6	2N2222	4
Q4	2N3906	1
D1,4,5,6	1N914	4
D2	MV104	1
D3	MV830	1
D7,9	1N4002	2
IC10	LM358	1
IC1	*MC6805T2 or 68705P3	1
IC2	MC146818P	1
IC3	MC145000P	1
IC4	GE Display	1
IC5	MC14518P	1
IC6	*MC145155P	1
IC7	MC7805	1
IC8,9	MC78L05	2

*denotes MC68705P3 option.

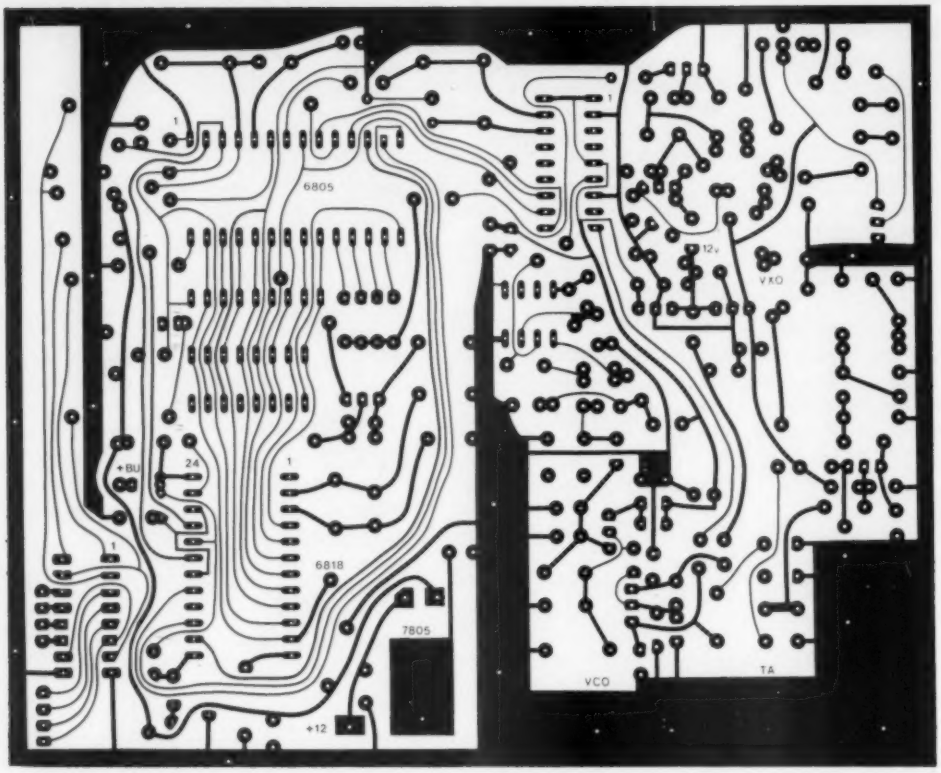

Fig. 13. Main vfo PC board (foil side).

down, depending on which sideband you are on. By tapping off the mode switch in the rig, the frequency may be shifted automatically.

Fig. 11 gives an example of how this may be accomplished. In this diagram, a voltage divider is switched, depending on what mode the radio is in. Of course, an additional position on the switch may be used for CW, AM, etc. This mod must be made if using the vfo as a companion for another digital rig which uses a 5-to-6-MHz vfo.

RIT

In almost every rig that I've owned, receiver incremental tuning (RIT) was a must for operating convenience. This vfo provides the user with not only a RIT control, but also a fine-tuning adjustment for stations between the 100-Hz resolution of the vfo. The foil pattern for all RIT components with the exception of the panel controls is on the PC board, including the relay used to switch it in and out. Fig. 12 illustrates how the RIT is implemented. (Thanks to Yaesu for their design.)

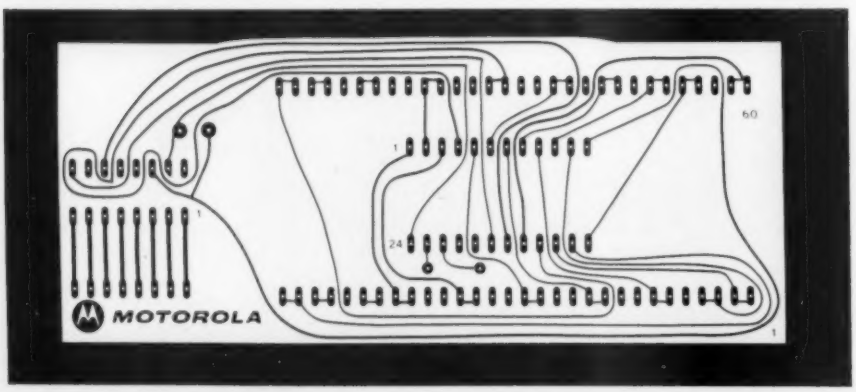

Fig. 14. Display PC board (foil side).

Construction and Alignment

I recommend that the vco be built first. This is the most difficult portion of the vfo, and the rest comes easily once this is completed. After the vco is built, check its frequency range by turning the slug in coil L2. It should encompass the 12.36-13.36-MHz range required. After this has been built, build the rest of the rf section (18-MHz vxo and filters). Only after you have 5 to 6 MHz coming out of the filter stage should you proceed with the digital section. Depending on which parts you are using (T2 or P3), select the appropriate jumpers and install the rest of the parts. The 6818 fre-

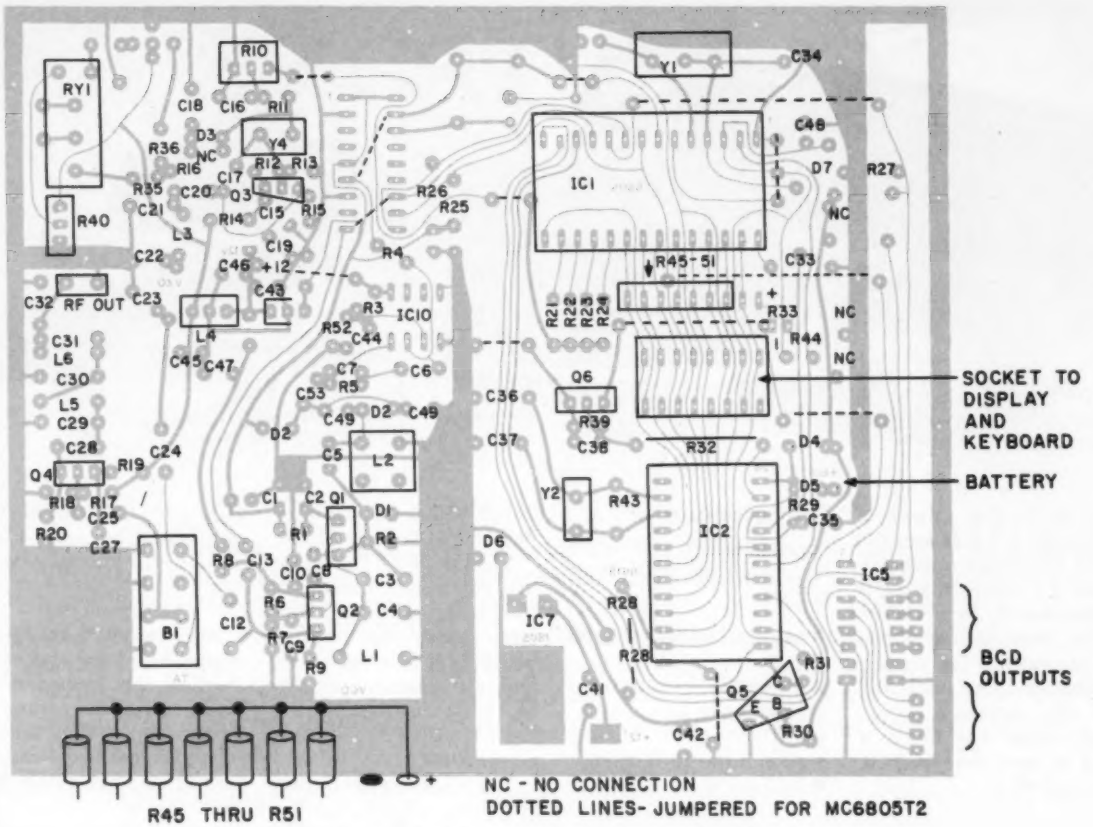

Fig. 15. Component placement, main board.

quency may be adjusted by placing a counter on pin 21. Trimmer C36 should be adjusted to read 4.194308 MHz. If you cannot bring it exactly on frequency, some adjustment of fixed capacitor C37 may be required.

If you are using the P3, the frequency of the MC145155 may be observed on pin 15 of the part. Adjust C39 for 2.048 MHz. If using the T2, use a low-capacitance probe on pin 5 of the MCU and adjust C34 for 4.096 MHz. If, upon power-up, the unit appears dead, it is time to borrow an oscilloscope to do some checking. First, check the jumpers and power supplies. Next, check to see that the oscillators are functioning properly.

If the unit seems to operate properly but the vco will not track, be sure that the loop filter is properly built and that there is a feedback frequency back to the PLL. Also, check for the obvious solder short.

Figs. 13 and 15 are the PC layouts for the vfo and display, respectively. Figs. 14 and 16 show component placement.

Table 1 lists the available modes of the vfo system. The modes are selected by strapping I/O pins PC0, PC1, and PC2 to either +5 V or ground through 15k resis-

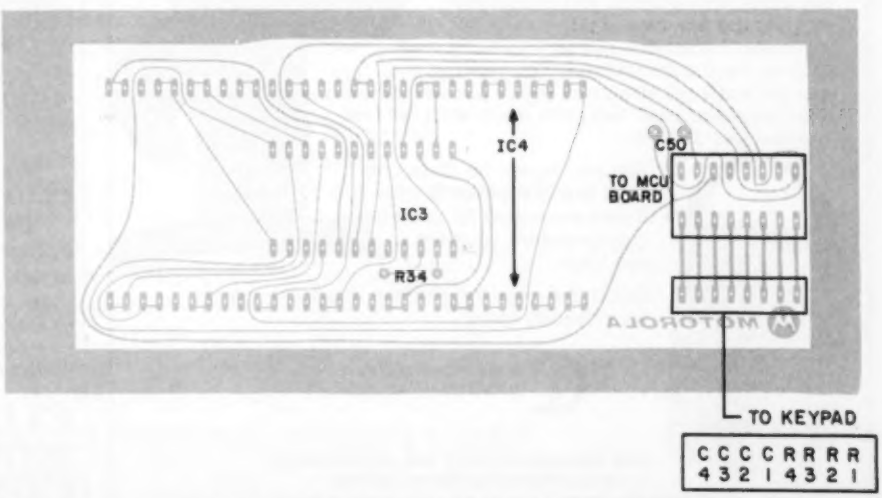

Fig. 16. Component placement, display board. Driver chip fits under display unit, on the same side of the board. Display unit is elevated above the board by segments of high-profile IC sockets (see photos).

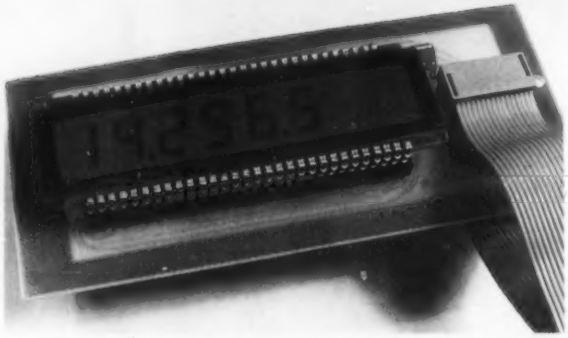

Display board. The liquid crystal display (LCD) unit plugs into a home-brew socket composed of pieces of two 40-pin IC sockets.

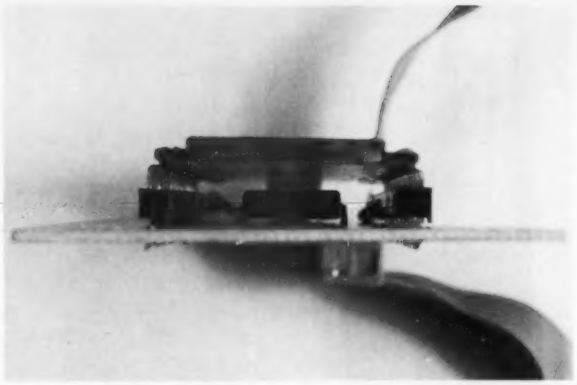

Display board. This view shows how the display driver IC mounts beneath the LCD unit.

tors. In the first column of the table, a 0 indicates the pin is connected to ground, while a 1 means the pin is connected to +5 V. The table shows the available modes vs. the frequencies produced. Also included are the purposes behind each mode. The mode is read at reset time on PC0, PC1, and PC2.

Getting the Parts

Approximate costs of the high-value items of the project are:

- MC6805T2L2—$12.00-15.00
- MC68705P3—$50.00 (not needed if the T2 is used)
- MC145155—$7.32 (not needed if the T2 is used)
- MC146818—$10.00
- MC145000—$12.49
- 8-digit LCD—$26.40

The MC6805T2 containing the program used for this project is an evaluation part under the number MC6805T2L2 (ceramic case) and is available from any Motorola distributor, as is the MC68705P3, the alternative MPU.

The liquid crystal display (GE part LXD69D7R09) is available from any GE distributor (Hamilton Avnet, etc.).

My heartiest thanks go to Helge Granberg and Mike Pendley, who provided me with some necessary rf savvy, and Ulrich Rohde, who gave me some insights into PLL system design.■

Take it from Mainerd . . . ™

"You'll have the best matched pair in town!"

Matching your antenna and transmitter requires the accuracy of our 1000-A RF Wattmeter for serious DXing. Trimming your antenna for the frequency you're working ensures you'll get maximum power out and minimum reflected power back. Get more reach with the best matched pair in town.

You can depend on Dielectric, **THE MAINE SOURCE**™ for 2-year-warranted RF products — quality meters, couplers and loads.

©1981 Dielectric Communications

Call us for more information and the name of your nearest dealer.

We're a Courage Center HANDI-HAM supporter.

New England integrity and craftsmanship . . . as traditional as Maine Lobster. ↩17

DIELECTRIC COMMUNICATIONS
A UNIT OF GENERAL SIGNAL

Raymond, Maine 04071 USA / 207-655-4555 / 800-341-9678 / TWX 710-229-6590

Organize your shack with a
CLUTTERFREE MODULAR CONSOLE $203.35

- Large, 42" H x 57" W x 29"D
- Strong groove-construction
- Mar-resistant wood grain finish
- Options, drawers & face plate
- For ham or home computer
- Visa and Master Charge

CLUTTERFREE MODULAR CONSOLES
P.O. Box 5103 Tacoma, WA 98405
(206) 759-1611 ↩89

REGAL RTTY

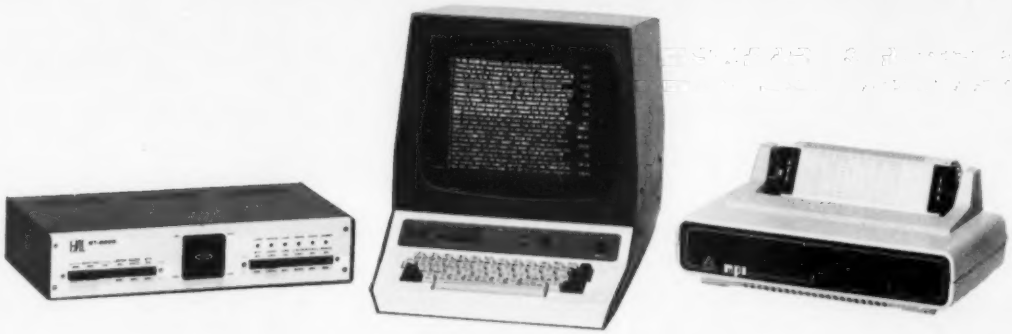

By popular acclaim – the leader and king of radio teleprinter communications – the **HAL DS3100ASR** and **ST6000.** When combined with the **MSO3100 Message Storage Option** and a hard-copy printer, you have the premier RTTY station. Discriminating operators the world-over choose the DS3100 and ST6000 for their stations over any other equipment. The DS3100 and ST6000 have set new standards of comparison for commercial and amateur RTTY data communications; they are representative of the high standards of quality and performance for which HAL is known throughout the world. Put your best RTTY signal forward with the DS3100 and ST6000!

- **Send and receive ASCII, Baudot and Morse code**
- **Full length 72 character lines and 24 line screen**
- **True "ASR" operation – pretype while receiving**
- **50 Line pretype, on-screen transmit buffer**
- **150 Line receive display buffer**
- **MSO3100 adds 450 lines of MAILBOX message storage**
- **P31 green, 12 inch display screen is built-in**
- **Control functions are clearly marked on keytops**
- **On-screen status indicators with real time**
- **Upper-lower case ASCII with ALL control codes**
- **45, 50, 57, 74, 100 baud Baudot**
- **110, 150, 300, 600, 1200, 1800, 2400, 4800, and 9600 baud ASCII – full or half duplex**
- **1 to 175 wpm send and receive Morse code**
- **Current loop or RS232 I/O interface**
- **ST6000 has tuning oscilloscope and loop supply**
- **Three RTTY shifts: 170, 425, or 850 Hz**
- **Multiple active RTTY filters and detector stages**
- **Crystal controlled RTTY transmit tones**
- **Printers available for hard-copy of all 3 codes**

Write or call for more details. See the DS3100, MSO3100, ST6000, and printers at your favorite HAL dealer.

HAL COMMUNICATIONS CORP. ↩345

BOX 365
URBANA, ILLINOIS 61801 **217-367-7373**

The ultimate team... the new Drake "Twins"

The TR7A and R7A offer performance and versatility for those who demand the ultimate!

TR7A Transceiver

• **CONTINUOUS FREQUENCY COVERAGE** — 1.5 to 30 MHz full receive coverage. The optional AUX7 provides 0 to 1.5 MHz receive plus transmit coverage of 1.8 to 30 MHz, for future Amateur bands, MARS, Embassy, Government or Commercial frequencies (proper authorization required).

• **Full Passband Tuning (PBT)** enhances use of high rejection 8-pole crystal filters.

New! **Both 2.3 kHz ssb and 500 Hz cw crystal filters, and 9 kHz a-m selectivity are standard,** plus provisions for two additional filters. These 8-pole crystal filters in conjunction with careful mechanical/electrical design result in realizable ultimate rejection in excess of 100 dB.

New! **The very effective NB7 Noise Blanker is now standard.**

New! **Built in lightning protection** avoids damage to solid-state components from lightning induced transients.

New! **Mic audio available** on rear panel to facilitate phone patch connection.

• **State-of-the-art design** combining solid-state PA, up-conversion, high-level double balanced 1st mixer and frequency synthesis provided a no tune-up, broadband, high dynamic range transceiver.

R7A Receiver

• **CONTINUOUS NO COMPROMISE 0 to 30 MHz frequency coverage.**

• **Full passband tuning (PBT).**

New! **NB7A Noise Blanker supplied as standard.**

• **State-of-the-Art features** of the TR7A, plus added flexibility with a low noise 10 dB rf amplifier.

New! **Standard ultimate selectivity choices** include the supplied 2.3 kHz ssb and 500 Hz cw crystal filters, and 9 kHz a-m selectivity. Capability for three accessory crystal filters plus the two supplied, including 300 Hz, 1.8 kHz, 4 kHz, and 6 kHz. The 4 kHz filter, when used with the R7A's Synchro-Phase a-m detector, provides a-m reception with greater frequency response within a narrower bandwidth than conventional a-m detection, and sideband selection to minimize interference potential.

• **Front panel pushbutton control** of rf preamp, a-m/ssb detector, speaker ON/OFF switch, i-f notch filter, reference-derived calibrator signal, three agc release times (plus AGC OFF), integral 150 MHz frequency counter/digital readout for external use, and Receiver Incremental Tuning (RIT).

The "Twins" System

• **FREQUENCY FLEXIBILITY.** The TR7A/R7A combination offers the operator, particularly the DX'er or Contester, frequency control agility not available in any other system. The "Twins" offer the only system capable of no-compromise DSR (Dual Simultaneous Receive). Most transceivers allow some external receiver control, but the "Twins" provide instant transfer of transmit frequency control to the R7A VFO. The operator can listen to either or both receiver's audio, and instantly determine his transmitting frequency by appropriate use of the TR7A's RCT control (Receiver Controlled Transmit). DSR is implemented by mixing the two audio signals in the R7A.

• **ALTERNATE ANTENNA CAPABILITY.** The R7A's Antenna Power Splitter enhances the DSR feature by allowing the use of an additional antenna (ALTERNATE) besides the MAIN antenna connected to the TR7A (the transmitting antenna). All possible splits between the two antennas and the two system receivers are possible.

Specifications, availability and prices subject to change without notice or obligation.

DRAKE

See your Drake dealer or write for additional information.

COMING SOON: **New RV75 Synthesized VFO Compatible with TR5 and 7-Line Xcvrs/Rcvrs**

• **Frequency Synthesized** for crystal-controlled stability • **VRTO (Variable Rate Tuning Oscillator*)** adjusts tuning rate as function of tuning speed. • **Resolution to 10 Hz** • **Three programmable fixed frequencies** for MARS, etc. • **Split or Transceive operation** with main transceiver PTO or RV75

R. L. DRAKE COMPANY • 540 Richard Street, Miamisburg, Ohio 45342 • Phone (513) 866-2421 • Telex 288-017

* Patent pending

New Drake TR5 Transceiver

far above average!

COMING SOON:
RV75 Synthesized VFO
featuring the Drake "VRTO"

• **Frequency Synthesized** for crystal-controlled stability • **VRTO (Variable Rate Tuning Oscillator*)** adjusts tuning rate as function of tuning speed. • **Resolution to 10 Hz** • **Three programmable fixed frequencies** for MARS, etc. • **Split or Transceive operation** with main transceiver PTO or RV75

* Patent pending

With the new TR5
versatility and value are spelled D-R-A-K-E . . .

DYNAMIC RANGE

The dynamic range of the TR5 is unexcelled by any transceiver in its class. The TR5's greater than 0 dBm third order intercept point (85 dB two-tone dynamic range) at 20 kHz spacing can be achieved only by the use of a passive diode-ring double balanced mixer. Drake was the first to bring this technology to the Amateur market with a high-level mixer in the TR7.

RELIABLE SERVICE

When you purchase a TR5, or any Drake product, you acquire a product of the latest production techniques, which provide reliable performance.

Yet with a product as sophisticated as one of today's transceivers, after-sales service is a must. Ask any Drake owner. Our Customer Service Department has a reputation second to none.

ACCESSORIES

Drake is the only Amateur Radio manufacturer who offers a full complement of accessories to satisfy almost every desire the HF Amateur may have. This wide selection allows any operator to assemble a station which meets his needs, and assures compatible interfacing and styling instead of a desk full of equipment with a variety of styling and poor operation as a system.

KILOWATT AMPLIFIER

Everyone wants to be heard! The accessory L75 and its 3-500Z (1200 watts PEP input) and a decent antenna will do the trick. This rugged self-contained amplifier / power supply will put the TR5 on an even footing with the best of them.

ENGINEERING

The TR5 and all Drake Transceivers, are backed by the best in engineering. The TR5 is the result of an extensive engineering effort, combining proven past techniques and ideas with new state of the art concepts.

As a result, the TR5 will not be superceded by a new model every six months. It represents a true radio communications value that will provide many years of operating enjoyment.

Features, availability and prices subject to change without notice or obligation.

See your Drake dealer or write for additional information.

R. L. DRAKE COMPANY

DRAKE

540 Richard St., Miamisburg, Ohio 45342, USA
Phone: (513) 866-2421 • Telex: 288-017

Keith Greiner AK0Q
421 N. Pleasant Hill Blvd.
Des Moines IA 50317

Surviving the Unthinkable

— part II: some practical ideas

In part I, I talked about the *idea* of emergency communications after a nuclear attack and the benefits the Amateur Service might provide. In this part, we'll talk about specific steps that each of us can take. First, though, let's set the stage:

Imagine this situation for a moment: The most incompetent of operators walked into your shack and for a fraction of an instant connected your receiver's antenna terminals to a high-voltage distribution line. The result was a 40-kV, 1,000-Amp shock to the input of your receiver. There wouldn't be very much left of your sensitive input circuits, to say the least.

This sounds like an impossible situation. I only wish that it were truly impossible. But in today's crisis-oriented world, the situation is indeed within the realm of possibility. The 40-kV shock is what civil-defense experts say would be the result of a nuclear blast in the vicinity of most any piece of unshielded wire, including telephone wires, power lines, antennas, and feedlines. The phenomenon is commonly referred to as a nuclear electromagnetic pulse (EMP or NEMP).

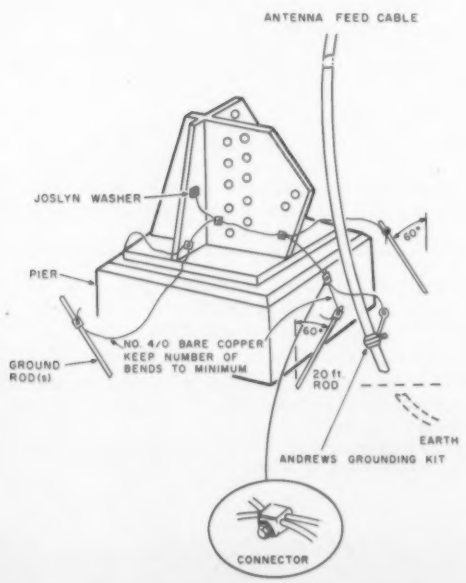

Fig. 1. Recommended ground connections at tower base.

This kind of pulse is so extreme in amplitude that many normal lightning protectors are useless. For example, a typical lightning pulse has about a 100-microsecond duration, with a 5-microsecond rise to its peak. A high-altitude EMP pulse can be expected to have a 1-microsecond duration and a 10-nanosecond rise to its peak. That's not enough time for many common lightning arrestors to work.

In the following pages we'll talk about some of the EMP protective measures which should be taken on your equipment. Without protection, sensitive semiconductors would be most likely to fail and put you out of business when your services may be needed most.

But, first, why should we even be concerned about protection? After all, any nuclear exchange seems to be so outrageously incompetent on the part of world leaders that it seems that it never could happen. Unfortunately, however, we've seen in the last few years that many improbable things such as revolutions, hostage taking, etc., have actually occurred.

Even though we all hope and pray that a nuclear exchange does not occur, let us not underestimate the devastating and paralyzing effects of such an exchange. Simply imagine, for a moment, a world with *hundreds of millions* of US and Russian citizens killed and *tens of millions* more severely and untreatably burned, near death, and starving. Major cities, with their sophisticated hospitals, police, telephone communication systems, radio and television stations, transportation, food distribution networks, financial centers, and manufacturing centers all eliminated—gone—not much usable left, and most likely too radioactive to approach for many years to

come. The situation might be reminiscent of the Cambodian experience of recent years, where a ruthless and irresponsible leadership evacuated the cities and forced an entire country into an unnecessary disaster. Imagine that situation in your community, among your friends—perhaps worldwide!

However, even in the worst of disasters, there will be some survivors. If not us, then our friends or relatives. Perhaps our children or grandchildren will be among those fortunate survivors. There also will be some amateur radio operators. Perhaps the best thing that we can do for these people faced with a completely unknown and hostile environment is to ensure that they have every possible assistance available to help them through the crisis.

In communications, that assistance means that in a world where the established public system is no longer available, the technical preparations of amateur radio operators may make the difference between life and death for countless hundreds of thousands. It could be the final foothold in their struggle for survival. After all, assistance during disasters is one of our key elements, and a justification for an Amateur Radio Service. Only amateur radio operators can supply an organized communication system from almost every community in this country. Only amateur radio operators can supply this system with a substantial portion of the surviving equipment easily made operational after the shock of a nuclear explosion. Citizens Band equipment for the most part would be rendered totally useless by its unprotected reliance on semiconductors and its tendency for total disorganization even in times when there is no crisis.

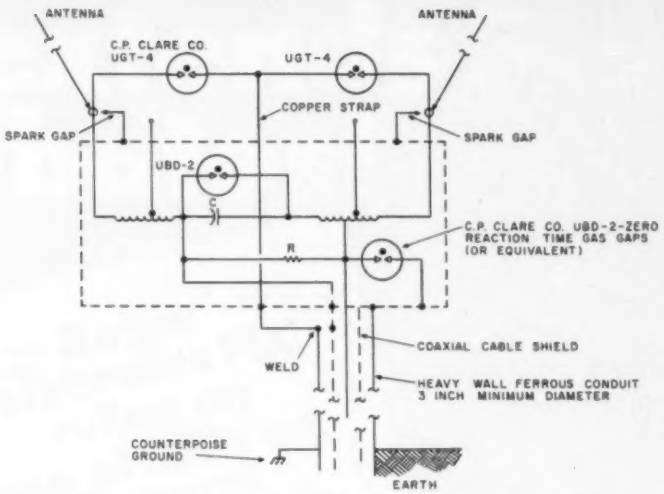

Fig. 2. Suggested use of gas gaps in an antenna balun. Note that this approach uses a thick-wall conduit around the coax.

The job of amateur radio equipment protection is easy once we realize that it does not need to be difficult or complex. Most any technical or non-technical operator can accomplish *some* EMP protection on short notice, with a very small outlay of money. The objective is to safely bypass your equipment and any incoming connections when they are presented with an EMP signal composed of 40 to 50 kV and current in the order of 1,000 Amperes.

It is interesting to note that much of the EMP protective equipment available today has been designed since our country stopped testing nuclear weapons. As a result, none of it has received the only true test of reliability—on-the-job testing—although EMP simulators are used.

Because of the lack of widespread testing capabilities, the only really proven method of protection is also the simplest. Under this approach, all equipment to be protected should be disconnected from all external wires and

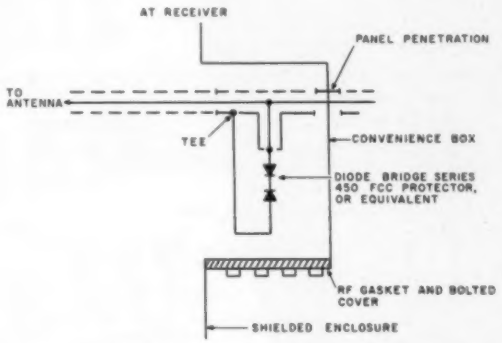

Fig. 3. Coaxial tee protectors used in a receiver circuit.

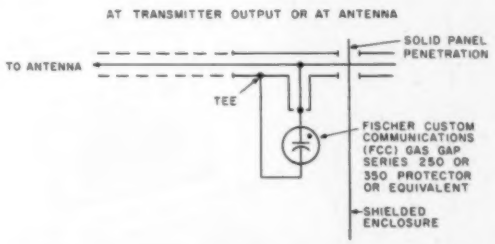
AT TRANSMITTER OUTPUT OR AT ANTENNA
SOLID PANEL PENETRATION
TO ANTENNA
TEE
FISCHER CUSTOM COMMUNICATIONS (FCC) GAS GAP SERIES 250 OR 350 PROTECTOR OR EQUIVALENT
SHIELDED ENCLOSURE

Fig. 4. Coaxial tee protectors shown in a transmitter circuit.

stored in a thoroughly sealed and shielded box. The box should have no holes where any kind of energy can get in and should have a skin made of 18- to 26-gauge metal to provide magnetic shielding for the equipment inside.

Since the civil-defense planners expect to have Americans moved to a safe location 30 to 200 miles from their community, depending on the nature of threat to that community, the equipment should likewise be moved to a location 30 to 200 miles from the community.

Keep in mind when storing your equipment that power supplies also should be shielded and stored with

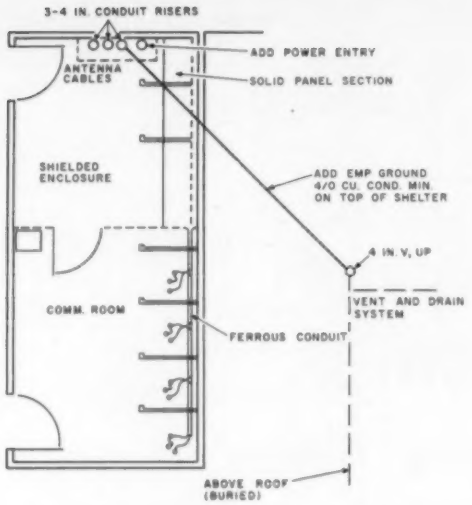

Fig. 5. Suggested layout for communications room with remote operation of equipment.

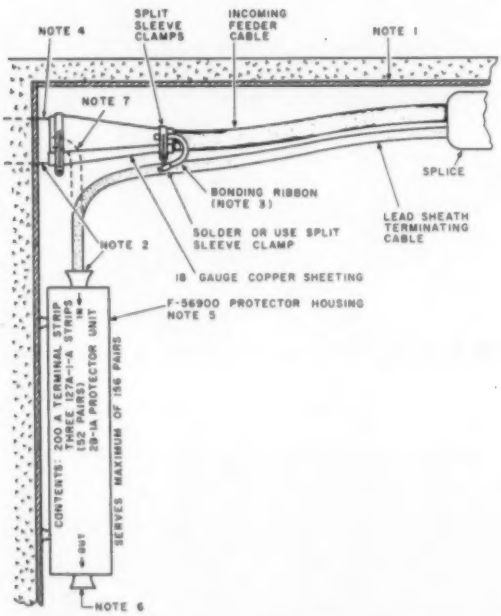

Fig. 6. This is one recommended method of protecting a telephone cable system against EMP transients. Note the heavy emphasis on shielding. The numbered notes refer to detailed construction specifications.

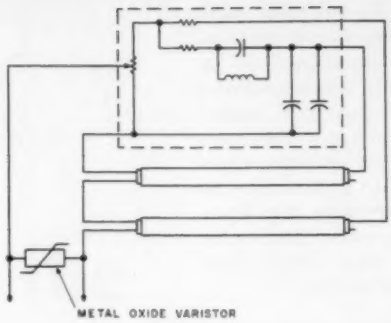

Fig. 7. This is a typical varistor installation applied to a fluorescent lighting circuit.

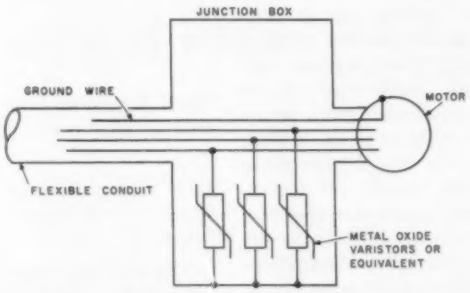

Fig. 8. This is a suggested circuit for EMP protection of a 3-phase, 4-wire motor using metal-oxide varistors (MOVs) connected between each hot wire and ground.

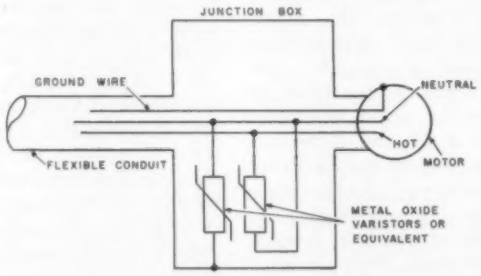

Fig. 9. Single-phase motor protection using MOVs between hot wires and ground.

your equipment because they are just as susceptible to an EMP transient signal as is your sensitive transmitting and receiving equipment. A publicly-released 1970 Department of Defense publication suggests that if equipment must be used during a threat of nuclear attack, at least one set of equipment (and likely more) should be held in reserve in the event of any equipment failure. In the ideal case, ham operators should have a reserve available due to equipment failure caused by every succeeding attack.

Good grounds are very important to EMP protection, and antennas should be well grounded. But a smart operator would keep a longwire and tuner stored as if to be used for Field Day for, in any emergency, the antennas can be expected to take the brunt of the effects and may need to be replaced in the fastest time possible.

The Department of Defense publication *EMP Protective Systems* suggests several approaches which should be used if you're going to shut down for a while in anticipation of an attack. First, you should open the master power switch at your service entrance. Second, all circuit breakers should be opened and all critical equipment should be turned off or disconnected.

When the equipment and power are to be restored, all circuits should be checked for arc-overs or damage before power is restored. Be sure to disconnect telephone and cable television connections, because the advice indicates that there

Robot extends $100 cash rebates!

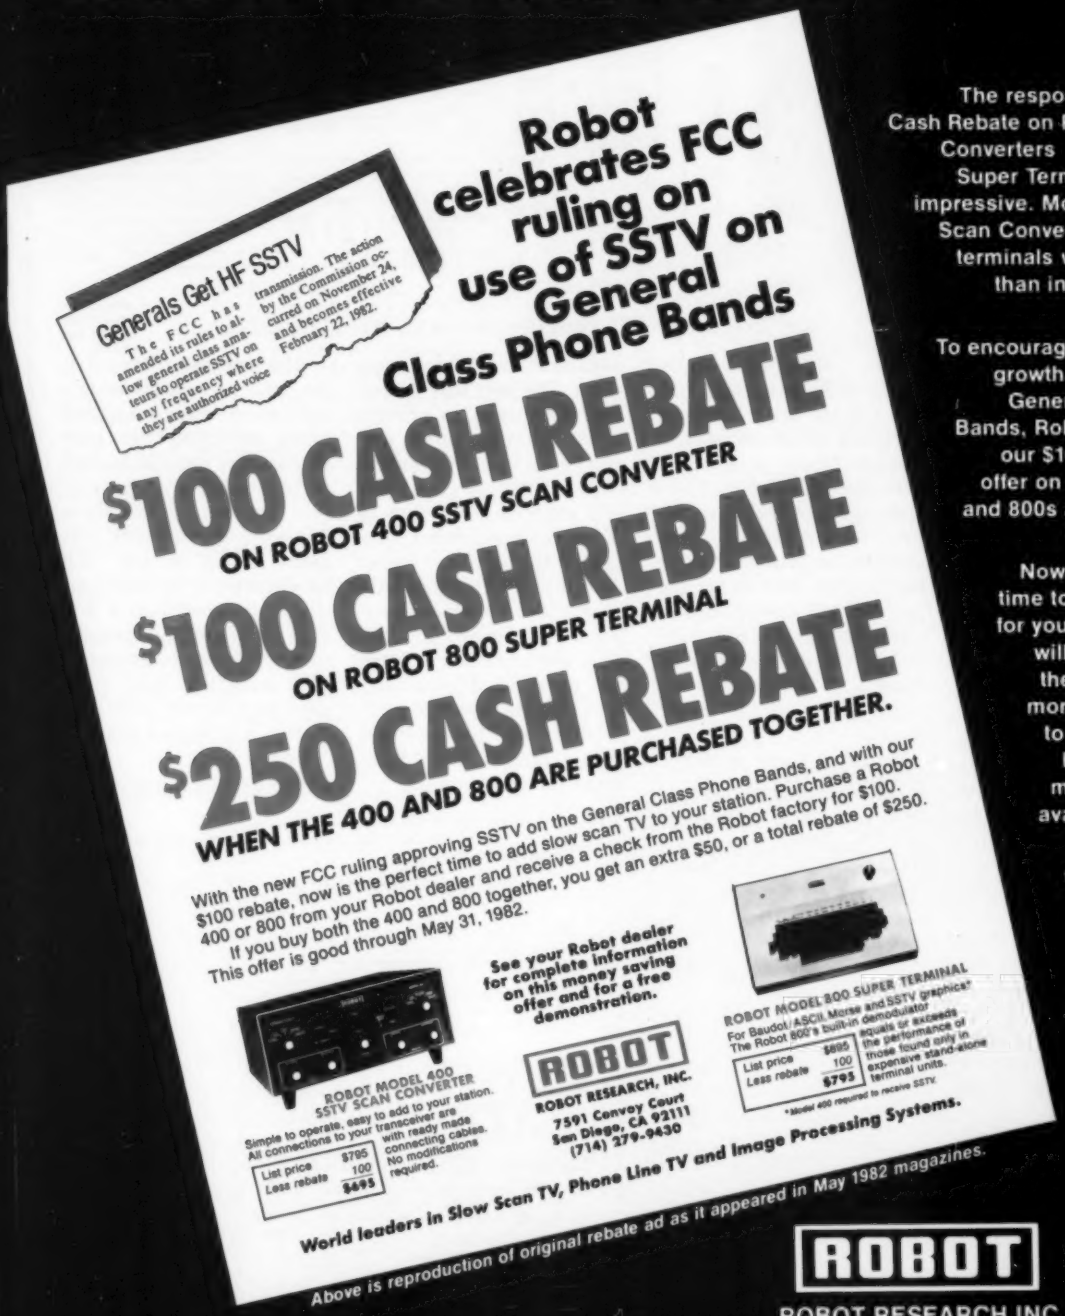
Generals Get HF SSTV
The FCC has amended its rules to allow general class amateurs to operate SSTV on any frequency where they are authorized voice transmission. The action by the Commission occurred on November 24, and becomes effective February 22, 1982.
Robot celebrates FCC ruling on use of SSTV on General Class Phone Bands
$100 CASH REBATE
ON ROBOT 400 SSTV SCAN CONVERTER
$100 CASH REBATE
ON ROBOT 800 SUPER TERMINAL
$250 CASH REBATE
WHEN THE 400 AND 800 ARE PURCHASED TOGETHER.
With the new FCC ruling approving SSTV on the General Class Phone Bands, and with our $100 rebate, now is the perfect time to add slow scan TV to your station. Purchase a Robot 400 or 800 from your Robot dealer and receive a check from the Robot factory for $100. If you buy both the 400 and 800 together, you get an extra $50, or a total rebate of $250. This offer is good through May 31, 1982.
See your Robot dealer for complete information on this money saving offer and for a free demonstration.
ROBOT MODEL 400 SSTV SCAN CONVERTER
Simple to operate, easy to add to your station. All connections to your transceiver are with ready made connecting cables. No modifications required.
List price $795
Less rebate 100
$695
ROBOT
ROBOT RESEARCH, INC.
7591 Convoy Court
San Diego, CA 92111
(714) 279-9430
ROBOT MODEL 800 SUPER TERMINAL
For Baudot/ASCII, Morse and SSTV graphics*
The Robot 800's built-in demodulator equals or exceeds the performance of those found only in expensive stand-alone terminal units.
List price $895
Less rebate 100
$795
*Model 400 required to receive SSTV.
World leaders in Slow Scan TV, Phone Line TV and Image Processing Systems.

Above is reproduction of original rebate ad as it appeared in May 1982 magazines.

The response to our $100 Cash Rebate on Robot 400 Scan Converters and Model 800 Super Terminals was truly impressive. More Robot SSTV Scan Converters and Robot terminals were purchased than in any like period in our history.

To encourage the continued growth of SSTV on the General Class Phone Bands, Robot is extending our $100 Cash Rebate offer on our Model 400s and 800s another 60 days to July 31, 1982.

Now is definitely the time to consider SSTV for your station. Prices will never be lower, there's never been more SSTV stations to work, and there have never been more frequencies available for SSTV.

The picture telephone of the future is here now for the amateur radio operator. See it at your Robot dealer today.

ROBOT

ROBOT RESEARCH INC.
7591 Convoy Ct., San Diego, CA 92111
(714) 279-9430

World Leaders in Slow Scan TV, Phone Line TV and Image Processing Systems.

could be a problem with any wire coming into your home. Since the EMP energy in long overhead wires can be extremely hazardous, be sure people stay away from these wires during a time of possible attack.

If you must have some radio equipment operating, dig out your old tube-type equipment and use it. Tubes are much less sensitive to high-voltage shocks and are more likely to recover. It is felt that less protective shielding is necessary for broadcast receivers with loopstick antennas or receivers with short antennas, including two-meter equipment. Again, however, because there are so many unknowns, a wise operator would most likely consider any equipment in full use to be vulnerable.

More advanced EMP protective measures which allow more operating versatility also have been published under the name of the Defense Civil Preparedness Agency and may be obtained from the Federal Emergency Management Agency in Washington, DC (ask for publication TR-61-B). These approaches to the problem center around the use of gas-gap arrestors, metal-oxide varistors (MOVs), coaxial tee protectors for antenna cables, and improved grounding. Some of their suggestions are described here, so you can start on your protection right away. The approach requires some expense and would be used if you would anticipate operating during a nuclear threat.

Improved grounding of a tower is extremely important for supplying a low-impedance path to ground for EMP current. The suggested way to accomplish this is shown in Fig. 1. The tower should be connected to the ground rods using 4/0 wire.

An alternative is to install 20 radials about 12 to 18 inches below the surface, using ½-inch copper tubing. The approach could get very expensive at today's copper prices but would provide an undisputably super ground for your vertical. Be sure to connect the outside of your antenna feed cable shields to the ground. Any control cables going up the tower should be shielded in threaded conduit so there is a perfect conductive shield all along the line.

A particularly sensitive part of an antenna circuit is a balun at the antenna feedpoint. The best way to protect a balun is to provide "zero reaction time" gas-gap arrestors in parallel with all balun capacitors and inductors. Be sure to have the breakdown voltage of the gas gap higher than that which you would expect under normal operations, even under unusually high swr conditions. Gaps can have breakdown voltages ranging from 220 volts to 30 kV and have current ratings ranging from 3,000 Amps on up.

The amount of time that any one gap arcs over is a factor to be considered when selecting the gap. Almost any gap can sustain a large number of low-current arc-overs, but only a few very-large-current arc-overs during its life. The specifications for each gap should be consulted if it is also to handle lightning-arresting chores in addition to EMP protection. Also, most gaps capable of EMP protection are labeled as such.

The characteristic capacitance of each gap is of

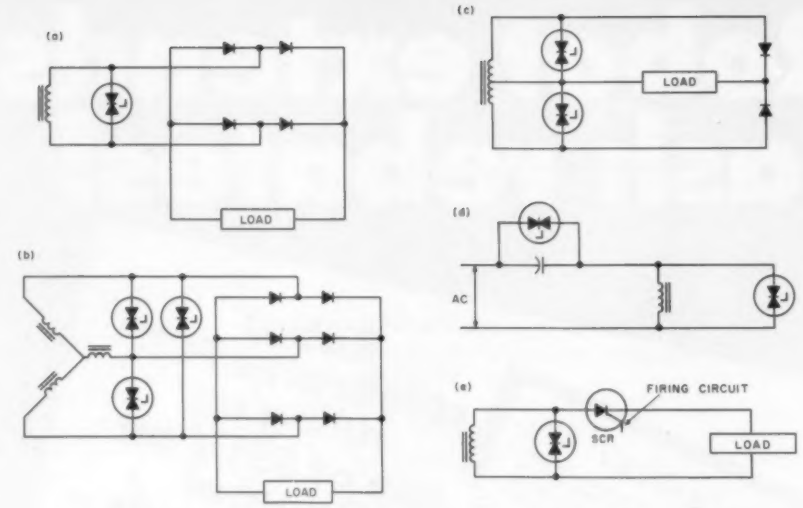

Fig. 10. Various EMP protective circuits for several typical circuits.

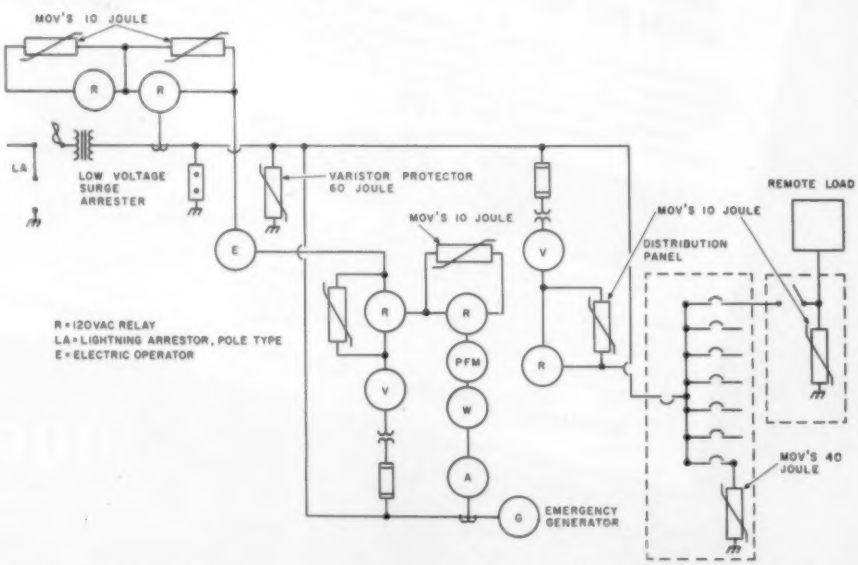

Fig. 11. Full-blown EMP protection for supplying power to communications equipment.

WATCH FOR OUR NEW PRODUCTS COMING SOON

HAL 2304 MHz DOWN COVERTERS (FREQ. RANGE 2000/2500 MHz)
2304 MODEL #1 KIT BASIC UNIT W/PREAMP LESS HOUSING & FITTINGS **$49.95**
2304 MODEL #2 KIT (with preamp) **$59.95**
2304 MODEL #3 KIT (with High Gain preamp) **$69.95**

MODELS 2 & 3 WITH COAX FITTINGS IN & OUT AND WITH WEATHER-PROOFED DIE CAST HOUSINGS

BASIC POWER SUPPLY **$19.95**
POWER SUPPLY KIT FOR ABOVE WITH CASE **$24.95**
FACTORY WIRED & TESTED **$34.95**

ANTENNAS & OTHER ACCESSORIES AVAILABLE. SEND FOR MORE INFO.

COMPLETE KITS: CONSISTING OF EVERY ESSENTIAL PART NEEDED TO MAKE YOUR COUNTER COMPLETE. **HAL-600A** 7-DIGIT COUNTER WITH FREQUENCY RANGE OF ZERO TO 600 MHz. FEATURES TWO INPUTS, ONE FOR LOW FREQUENCY AND ONE FOR HIGH FREQUENCY. AUTOMATIC ZERO SUPPRESSION. TIME BASE IS 1.0 SEC OR .1 SEC GATE WITH OPTIONAL 10 SEC GATE AVAILABLE. ACCURACY ± .001%. UTILIZES 10-MHz CRYSTAL 5 PPM. **COMPLETE KIT $129**

HAL-300A 7-DIGIT COUNTER (SIMILAR TO 600A) WITH FREQUENCY RANGE OF 0-300 MHz. **COMPLETE KIT $109**

HAL-50A 8-DIGIT COUNTER WITH FREQUENCY RANGE OF ZERO TO 50 MHz OR BETTER. AUTOMATIC DECIMAL POINT. ZERO SUPPRESSION UPON DEMAND. FEATURES TWO INPUTS: ONE FOR LOW FREQUENCY INPUT, AND ONE ON PANEL FOR USE WITH ANY INTERNALLY MOUNTED HALTRONIX PRE-SCALER FOR WHICH PROVISIONS HAVE ALREADY BEEN MADE. 1.0 SEC AND .1 SEC TIME GATES. ACCURACY ± .001%. UTILIZES 10-MHz CRYSTAL 5 PPM. **COMPLETE KIT $109**

FREE: HAL-79 CLOCK KIT PLUS AN INLINE RF PROBE WITH PURCHASE OF ANY FREQUENCY COUNTER.

PRE-SCALER KITS

HAL 300 PRE (Pre-drilled G-10 board and all components) **$14.95**
HAL 300 A/PRE (Same as above but with preamp) **$24.95**
HAL 600 PRE (Pre-drilled G-10 board and all components) **$29.95**
HAL 600 A/PRE (same as above but with preamp) **$39.95**

TOUCH TONE DECODER KIT

HIGHLY STABLE DECODER KIT. COMES WITH 2 SIDED, PLATED THRU AND SOLDER FLOWED G-10 PC BOARD, 7-567's, 2-7402, AND ALL ELECTRONIC COMPONENTS. BOARD MEASURES 3-1/2 × 5-1/2 INCHES. HAS 12 LINES OUT. ONLY **$39.95**

NEW—16 LINE DELUXE DECODER **$69.95**

DELUXE 12-BUTTON TOUCHTONE ENCODER KIT UTILIZING THE NEW ICM 7206 CHIP PROVIDES BOTH **VISUAL** AND **AUDIO** INDICATIONS! COMES WITH ITS OWN TWO-TONE ANODIZED ALUMINUM CABINET MEASURES ONLY 2¾ "x3¾" COMPLETE WITH TOUCH-TONE PAD, BOARD, CRYSTAL, CHIP AND ALL NECESSARY COMPONENTS TO FINISH THE KIT. **PRICED AT $29.95**

NEW—16 LINE DELUXE ENCODER **$39.95**

HAL ECD—16 LINE DELUXE ENCODER INCLUDES PC BOARD, ALL PARTS & CASE **$39.95**

HAL ECD—12 LINE DELUXE ENCODER COMPLETE WITH PC BOARD, ALL PARTS & CASE **$29.95**

ACCUKEYER (KIT) THIS ACCUKEYER IS A REVISED VERSION OF THE VERY POPULAR WB4VVF ACCUKEYER ORIGINALLY DESCRIBED BY JAMES GARRETT, IN QST MAGAZINE AND THE 1975 RADIO AMATEUR'S HANDBOOK. **$16.95**

ACCUKEYER—MEMORY OPTION KIT PROVIDES A SIMPLE, LOW COST METHOD OF ADDING MEMORY CAPABILITY TO THE WB4VVF ACCUKEYER. WHILE DESIGNED FOR DIRECT ATTACHMENT TO THE ABOVE ACCUKEYER, IT CAN ALSO BE ATTACHED TO ANY STANDARD ACCUKEYER BOARD WITH LITTLE DIFFICULTY. **$16.95**

BUY BOTH THE MEMORY AND THE KEYER AND **SAVE** COMBINED PRICE ONLY **$32.00**

PRE-AMPLIFIER

HAL-PA-19 WIDE BAND PRE-AMPLIFIER, 2-200 MHz BANDWIDTH (– 3dB POINTS). 19 dB GAIN. **FULLY ASSEMBLED AND TESTED $8.95**

HAL-PA-1.4 WIDE BAND PRE-AMPLIFIER, 10 MHz TO 1.4 GHz. 12dB GAIN. **FULLY ASSEMBLED $12.95**

NEW!

CLOCK KIT—HAL 79 FOUR-DIGIT SPECIAL—$7.95. OPERATES ON 12-VOLT AC (NOT SUPPLIED) PROVISIONS FOR DC AND ALARM OPERATION.

6-DIGIT CLOCK•12/24 HOUR

COMPLETE KIT CONSISTING OF 2 PC G-10 PRE-DRILLED PC BOARDS, 1 CLOCK CHIP, 6 FND COMM. CATH. READOUTS, 13 TRANS., 3 CAPS, 9 RESISTORS, 5 DIODES, 3 PUSH-BUTTON SWITCHES, POWER TRANSFORMER AND INSTRUCTIONS. DON'T BE FOOLED BY PARTIAL KITS WHERE YOU HAVE TO BUY EVERYTHING EXTRA. **PRICED AT $12.95**

CLOCK CASE AVAILABLE AND WILL FIT ANY ONE OF THE ABOVE CLOCKS. REGULAR PRICE $6.50. **BUT ONY $4.50 WHEN BOUGHT WITH CLOCK.**

SIX-DIGIT ALARM CLOCK KIT FOR HOME, CAMPER, RV, OR FIELD-DAY USE. OPERATES ON 12-VOLT AC OR DC, AND HAS ITS OWN 60-Hz TIME BASE ON THE BOARD. COMPLETE WITH ALL ELECTRONIC COMPONENTS AND TWO-PIECE, PRE-DRILLED PC BOARDS. BOARD SIZE 4" × 3". COMPLETE WITH SPEAKER AND SWITCHES. IF OPERATED ON DC, THERE IS NOTHING MORE TO BUY* **PRICED AT $16.95**

*TWELVE-VOLT AC LINE CORD FOR THOSE WHO WISH TO OPERATE THE CLOCK FROM 110-VOLT AC. **WHEN PURCHASED WITH CLOCK KIT $2.95**

SHIPPING INFORMATION: ORDERS OVER $25 WILL BE SHIPPED POST-PAID EXCEPT ON ITEMS WHERE ADDITIONAL CHARGES ARE REQUESTED. ON ORDERS LESS THAN $25, PLEASE INCLUDE ADDITIONAL $2.00 FOR HANDLING AND MAILING CHARGES. SEND 20¢ STAMP FOR FREE FLYER.

DISTRIBUTOR FOR
Aluma Tower•AP Products
(We have the new **Hobby-Blox System**)

"HAL" HAROLD C. NOWLAND
W8ZXH

HAL-TRONIX
P. O. BOX 1101
SOUTHGATE, MICH. 48195
PHONE (313) 285-1782

↙31

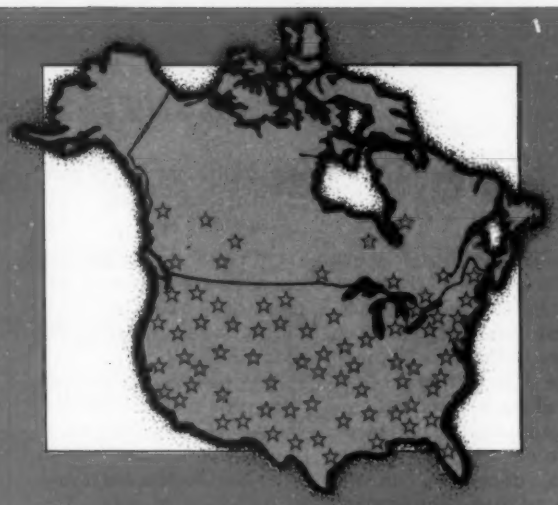

The places to buy ARCO Solar™ Power Systems are popping up everywhere.

For some very sound reasons. Not all solar electric systems are created equal. ARCO Solar products offer all the features that add up to superior performance and increased value. Features like design, construction, warranty, accessories and service. Those who know what dependable, stand-alone power can do for their communications equipment, know how important these features are.

And now, there are 2,500 dealers across the United States and Canada offering ARCO Solar power systems. For the name of the dealer nearest you, contact one of our regional distributors:

DENVER, CO
C.W. Electronic Sales
(303) 832-1111

LOS ANGELES, CA
Henry Radio
(213) 820-1234

DALLAS, TX
Hutton Companies
Dallas (214) 484-0580

NORTH HOLLYWOOD, CA
Wm. Lamb Company
(213) 980-6248

LENEXA, KS
North Supply Company
(913) 888-3800

SCOTTSDALE, AZ
Photocomm
(602) 948-8003

HONOLULU, HI
Servco Pacific Inc.
(808) 841-3644

WILLITS, CA
Solar Electric Specialties
(707) 459-9496

SANTA BARBARA, CA
Solar West Electric
(805) 963-9667

CALGARY ALBERTA CANADA
Westronics Engineering
(403) 253-5585



©ARCO Solar, Inc. 73-682

ARCO Solar, Inc. ↙121

Subsidiary of AtlanticRichfieldCompany

↙See List of Advertisers on page 114

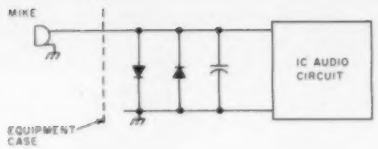

Fig. 12. Switching diodes may be used to protect very short wires. Use 1N3653s and a 0.1-μF, 500-volt capacitor.

considerable importance in rf circuits since the interelectrode capacitance between gap electrodes can cause additional capacitance to be put into the circuit along with the gas gap. This capacitance can be on the order of 2 to 15 pF or more, depending on the type of gap. The capacitance can be reduced by connecting two gaps in series. If you use that approach, be sure to put a 1-megohm or higher resistor (about 1 Watt) across each gap to equalize the voltage between gaps. Keep in mind, too, that connecting two gaps in series roughly doubles their breakdown voltage. An example of the use of gas gaps in an antenna balun is shown in Fig. 2.

At the transmitter or receiver, you may use a gas gap or tee protector as shown in Fig. 3. The diode shown here is a silicon type. While this diode has a fast reaction time, it may not be able to sustain the needed current, and should be preceded by a gas gap at a point closer to the antenna. Fig. 4 shows a gas gap connected in a transmitter circuit.

If you want to go first class and prepare the entire shack (Fig. 5), you could be in for a very expensive project, which may not be necessary if you can shut down your equipment as discussed above. However, if you wish to take that step, the FEMA recommends that the shack should be *completely encased* in 18- to 26-gauge galvanized sheet metal! To provide complete protection, the treatment includes the door and ventilation facilities. The sheet metal should be folded at the seams and soldered, with a strip of tinned-metal tape covering the seam.

Telephone landlines should be brought into the shack via 50 to 300 feet of conductive conduit which is welded to the enclosure at the point of entry. The lines should be terminated in gas gaps, metal-oxide varistors, or both. Fig. 6 shows an example. Even your lighting system should have MOV protection as shown in Fig. 7.

Ac power supply lines should have MOVs at all critical points. FEMA recommends that MOV ratings should exceed the stored inductive energy of the preceding transformer and also should exceed the no-load transformer current. Typical varistors have ratings of 40 joules (some are in the range of 10 to 200 joules) and should be installed at 40 joules per phase of the ac line. Four 10-joule varistors connected in parallel will provide the needed 40-joule protection. Electrical distribution boxes and control boxes, of course, should be thoroughly shielded. FEMA recommends that doors and openings should be fitted with rf-shielding gaskets and conductive epoxy.

Don't forget the ventilation system, where all motor wires and switches should be thoroughly shielded and protected with MOVs. Some additional circuit protection approaches may be seen in Figs. 8 through 12.

Of particular importance is the emergency generator to be used. All important wiring should have MOV protection. Shielded conductors should be used for best results and the shields should be grounded. ■

EMP Protection Equipment Sources

Some EMP protective devices are not easily obtained. I have found that even a local distributor cannot always obtain information about them. Following is an updated list of sources. Those with asterisks (*) have expressed their interest in selling the equipment by sending me information when I specifically requested information about EMP protection.

*C. P. Clare Co. 3101 West Pratt Avenue Chicago IL 60645	Gas gaps and other transient protectors
Dale Electronics, Inc. Box 609 Columbus NE 68601	Gas gaps and other transient protectors
*Emerson and Cuming, Inc. 869 Washington Street Canton MA 02021	Conductive adhesives Rf gaskets Rf shielding
*Fischer Custom Communications Box 581 Manhattan Beach CA 90266	Coaxial tee protectors
General Electric Company Electronic Comp. Sales Operation 1 River Road Schenectady NY 12306	Metal-oxide varistors (MOVs)
General Semiconductor Industries 2001 W. Tenth Place Tempe AZ 85281	Gas gaps and other transient protectors
*Joslyn Electronics Systems 6868 Cortona Drive Goleta CA 93017	Gas gaps and other transient suppressors
Lectro Magnetics 6056 W. Jefferson Blvd. Los Angeles CA 90016	Rf shields
E. A. Lindgren and Associates 4515 N. Ravenswood Avenue Chicago IL 60640	Rf shields
Ray Proof Corporation Keeler Avenue Norwalk CT 06856	Rf shields
*Shielding Technology, Inc. (Division of Chomerics) 970 New Durham Road Edison NJ 08816	Conductive adhesives
Technical Wire Products 129 Dermody Street Cranford NJ 07016	Rf gaskets and shielding
*Technit (EMI Shielding Division) 320 North Nopal Street Santa Barbara CA 93103	Rf gaskets and shielding
Topatron, Inc. Box 967 Costa Mesa CA 92627	Rf gaskets and shielding
Transtector Systems 532 Monterey Pass Road Monterey Park CA 91754	Transient suppressors

Acknowledgement

The basis for Figs. 1 through 6 and 8 through 11 is *EMP Protective Measures*, Defense Civil Preparedness Agency, 1976.

new

In Repeaters

Some people want the finest, Others want the lowest price.... Now you can have Both!

Introducing the *New Low Cost* Spectrum SCR 77 Repeaters—2M, 220 & 440 MHz!

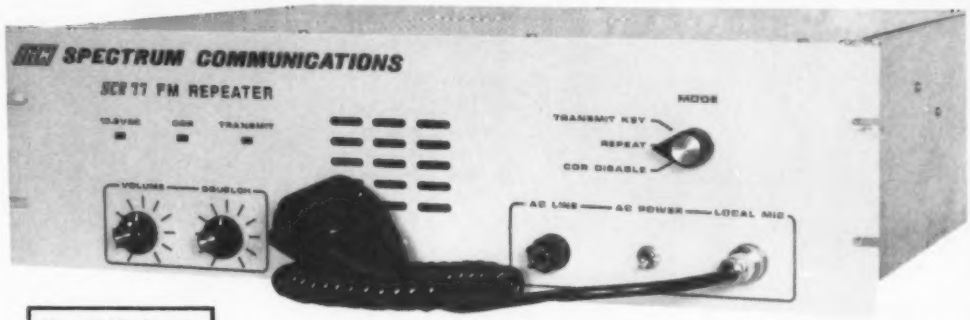

15 or 30 Wt. Xmtrs.

Includes:
- **0.35μV Rcvr. 8 Pole IF Filter**
- **Crystals** – high stability .0005%
- **Local Mic**
- **Your Call programmed into IDer**
- **Provision for Auto-Switchover to Btry. Pwr.**
- **Built-in 115/230V AC Supply;** basic **Panel Controls, Spkr., LED Indicators**

If you're looking for a new Repeater, but you really don't need (or can't afford) all the features and options on our world famous, 'super deluxe' SCR1000/4000, then our new economy line of SCR77 Repeaters is ideal for you!

These new Repeaters maintain the quality of design, components and construction which made Spectrum gear famous. However, all of the "bells & whistles" which you may not need or want have been eliminated—*at a large cost savings to you!* The SCR77 is a real "workhorse" basic machine designed for those who want excellent, super-reliable performance year after year—*but no frills!* ('PL', 12 Pole IF Filter, Front End Preselector, and a 30Wt. Transmitter are the only "built-in" options available; but Autopatch, Remote Control, and other equipment can be connected via the rear panel jack.)

A complete line of duplexers, antennas, cabinets, cable, etc., is also available.

Of course, if you do want a full featured/super deluxe repeater, with higher power and a full list of available 'built-in' options, then you want our SCR1000 or 4000 "Dream Machine". These units will continue to be available for those who want 'The Ultimate in Repeaters'.

SCR77 Pricing (15Wt.): 2M or 220MHz, $995.00 Amateur Net. 440MHz, $1150.00. For no 'plug-in' ID board (Export), deduct $40.00. *Call or write today for a data sheet, or to place your order!* Sold Factory Direct or through Export Sales Reps only.

10M FM RX/TX Boards, Repeaters & Remote Bases NOW AVAILABLE! Call or Write for Full Info.

¡Se habla Español!

SC SPECTRUM COMMUNICATIONS

1055 W. Germantown Pk,S6 • Norristown, PA 19401 • (215) 631-1710 • Telex: 846-211

See List of Advertisers on page 114

Communications Specialists TE-64

Food for thought.

Our new Universal Tone Encoder lends it's versatility to all tastes. The menu includes all CTCSS, as well as Burst Tones, Touch Tones, and Test Tones. No counter or test equipment required to set frequency-just dial it in. While traveling, use it on your Amateur transceiver to access tone operated systems, or in your service van to check out your customers repeaters; also, as a piece of test equipment to modulate your Service Monitor or signal generator. It can even operate off an internal nine volt battery, and is available for one day delivery, backed by our one year warranty.

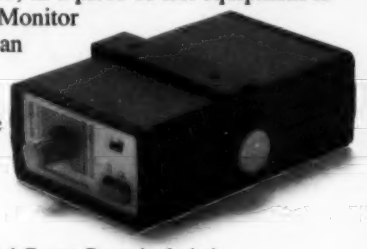

- All tones in Group A and Group B are included.
- Output level flat to within 1.5db over entire range selected.
- Separate level adjust pots and output connections for each tone Group.
- Immune to RF
- Powered by 6-30vdc, unregulated at 8 ma.
- Low impedance, low distortion, adjustable sinewave output, 5v peak-to-peak.
- Instant start-up.
- Off position for no tone output.
- Reverse polarity protection built-in.

Group A

67.0 XZ	91.5 ZZ	118.8 2B	156.7 5A
71.9 XA	94.8 ZA	123.0 3Z	162.2 5B
74.4 WA	97.4 ZB	127.3 3A	167.9 6Z
77.0 XB	100.0 1Z	131.8 3B	173.8 6A
79.7 SP	103.5 1A	136.5 4Z	179.9 6B
82.5 YZ	107.2 1B	141.3 4A	186.2 7Z
85.4 YA	110.9 2Z	146.2 4B	192.8 7A
88.5 YB	114.8 2A	151.4 5Z	203.5 M1

- Frequency accuracy, ± .1 Hz maximum - 40°C to + 85°C
- Frequencies to 250 Hz available on special order
- Continuous tone

Group B

TEST-TONES:	TOUCH-TONES:	BURST TONES:
600	697 1209	1600 1850 2150 2400
1000	770 1336	1650 1900 2200 2450
1500	852 1477	1700 1950 2250 2500
2175	941 1633	1750 2000 2300 2550
2805		1800 2100 2350

- Frequency accuracy, ± 1 Hz maximum - 40°C to + 85°C
- Tone length approximately 300 ms. May be lengthened, shortened or eliminated by changing value of resistor

Wired and tested: $79.95

master charge

VISA

COMMUNICATIONS SPECIALISTS

426 West Taft Avenue, Orange, California 92667
(800) 854-0547/ California: (714) 998-3021

15

Bob Chormley KØBV
5800 Jones Pl. NW
Albuquerque NM 87120

A Split Personality for the KDK FM2015R

A simple modification to your KDK FM2015R will give you the capability to receive on one frequency stored in memory and transmit on another. This modification gives you the newer FM2016's capability to operate with nonstandard offsets without an additional crystal. It requires two diodes, a piece of wire, no holes, and less than half an hour. The rig may easily be returned to original configuration whenever desired.

A different form of this mod was described in some Amateur-Wholesale Electronics notes concerning MARS-CAP modification, so I can't take credit for the original idea. I'll first describe how the modification functions, then go through a step-by-step modification procedure.

The resulting front-panel performance is as follows: Select Mode A. With the memory-select switch at OFF, you have simplex operation on the dialed-in and displayed frequency. Selecting memory position 2 will allow you to receive on the frequency stored there, which is displayed as usual. When you transmit, however, the memory internally shifts to the frequency stored in channel 1. This frequency is displayed while transmitting, and the display shifts back to your channel 2 receive frequency when the mic button is released.

Channels 3 and 4 work the same, with channel 4 functioning as the receive channel, switching automatically to the frequency stored in channel 3 on transmit. If either channel 1 or 3 is selected, simplex operation on those channels is the result. All that for only two diodes!

Here's how it works: On transmit in the unmodified rig, a transmit oscillator is diode-switched on by +9 volts from the front panel MODE switch. We locate the wire which runs to the "A" oscillator position (which has no crystal installed) and run switching diodes from there to two places.

The first diode goes to the simplex crystal position, activating it on transmit. The second diode goes to one of the two memory-select lines (AØ and A1) which select the memory channel. In an unmodified rig, the same memory frequency is used on both receive and transmit. If you trace out the schematic,

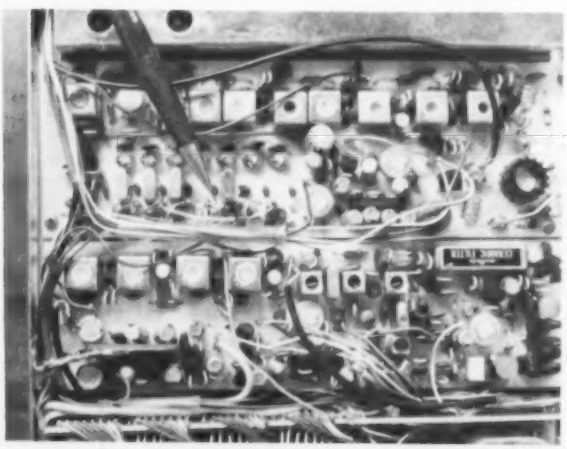

Photo A.

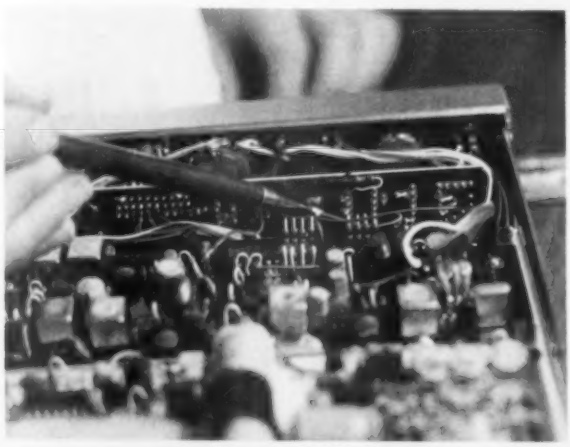

Photo B.

you will see that in the original configuration when memory position 2 is front-panel selected, +9 volts is routed through this memory switch to memory-select line A1. Or, if memory position 3 is selected, A0 is taken high. Memory position 1 requires both A0 and A1 to be high, and position 4 requires neither to be high. If we modify things to make A0 high on transmit only, then memory position 4 on receive becomes 3 on transmit, and 2 becomes 1 on transmit. This switching is done with diodes to avoid interfering with other functions.

To perform this mod, remove both top and bottom covers from the rig. With the rig right side up, locate the three crystals on the transmitter board. (See Photo A and ignore the fourth crystal which I installed for another offset.) A terminal post corresponds to each crystal position. A yellow wire is connected to the first unused crystal position, which is the fourth one in from the outside edge of the board. The pencil in the photo is touching this terminal.

Note that this wire is connected to the "A" MODE switch position and is switched to +9 volts on transmit. Remove the wire from this terminal post. You will run two diodes from this yellow wire, and you will need to mechanically secure this junction somehow. I slipped a piece of spaghetti over the terminal and tied the wire/diodes to it. However you do it, the first diode is soldered from the yellow wire to the first crystal position's terminal (the one with the brown wire). The diode points at the brown wire (cathode to brown wire) and will activate the simplex oscillator on transmit.

The second diode's anode is also soldered to the yellow wire. At this point, the yellow wire should form a "flying tie point" with the two diode anodes. Attach the cathode (point) of the second diode to a length of hookup wire. Route the free end of the wire toward the front of the radio to the control board and connect it to the A0 pad. This control board is accessible from the bottom of the radio and is located near the front panel. See Photo B. The pencil points to pad A0. The wire attached to the pad is the one I added for this mod.

The A0 and A1 pads are designated as such on the component side of the board and have white/brown (A0) and white/black (A1) wires attached to them on the component side. This completes the modification.

Verify that the rig will operate now as described earlier. This mod is totally "safe" in that the rig can't be harmed by incorrect front-panel switch settings. MODE switch positions B and C are still available for nonstandard offset crystals if desired. The rig's operation in all other respects is unaffected.

The only problem I encountered was that the simplex transmit oscillator didn't function until the yellow wire and diodes were isolated from the fourth oscillator terminal as I have described. If you feel like experimenting, leave the yellow wire connected and solder the diodes directly to the terminal. If it works (if the transmitter puts out power), then you win. If not, then isolate the wire/diodes as I described. Please send an SASE if you have any questions. ■

IRON POWDER and FERRITE PRODUCTS

AMIDON Associates ✓334

Fast, Reliable Service Since 1963

Small Orders Welcome — Free 'Tech-Data' Flyer

Toroidal Cores, Shielding Beads, Shielded Coil Forms
Ferrite Rods, Pot Cores, Baluns, Etc.

12033 OTSEGO STREET, NORTH HOLLYWOOD, CALIFORNIA 91607

SHEET METAL WORKERS

TRIOK

MULTI-PURPOSE
- SHEAR
- PRESS BRAKE
- SLIP ROLL

ALL FUNCTIONS OPERATE SIMULTANEOUSLY

THE COMPLETE R&D SHOP
- 24" wide • 257 lbs.
- 20" ga. capacity mild steel or
- .050/.060" ½ hard aluminum
- punches, special dies, stand available as accessories

SHEAR-NOTCHER

NO DISTORTION • NO BURRS
- continuous shearing
- corner notching
- tab notching
- nibbling

$58.50 plus $4.00 shipping

✓113
Send for your FREE literature and SHEET METALWORKER BULLETIN

PACIFIC ONE CORPORATION
410 W. Pacific Coast Hwy. Suite K 206
Newport Beach, CA 92663 (714) 645-5962



WE'RE ROLIN IN CRYSTALS! ✓418

2 Meter Crystals — $3.95 each
(10 or More — $3.50 each)
Quick Delivery

We Stock Crystals For:

Clegg	Drake	Icom
Kenwood	Midland	Regency
Standard	Wilson	Yaesu
Lafayette	Tempo	VHF Eng

(Custom Crystal Orders Accepted.)

Rolin Distributors
P.O. Box 436 Department 7
Dunellen, N.J. 08812
201-469-1219

Precision Cut Land Mobiles Available

✓See List of Advertisers on page 114

Building for Beginners

—happiness is a hot soldering iron

Paul M. Danzer N1II
2 Dawn Road
Norwalk CT 06851

I have authored several short construction articles in the past year or two and each time their publication was followed by a flurry of letters asking for help in selecting parts and building the circuit. This mail suggests that a number of hams without very much electronic construction experience would still like to home-brew their own.

For this reason, I have put together a set of suggestions and hints which answer the most commonly asked questions. The next time you see a circuit or gadget described in *73* or elsewhere, don't be shy—go ahead and build it! You'll be delighted with the results.

Where Can I Get the Parts?

The most critical part of building anything these days is obtaining the parts. Years ago, the corner radio store carried almost anything you wanted, and if you lived in a metropolitan area you could always go down to "radio row" where there was a cluster of such stores. Today, your best bet is either the mail-order ads in the back of this magazine or the Radio Shack chain of stores. Radio Shack carries a line of the most commonly used parts and has stores scattered throughout the country.

The mail-order advertisers in the back of this magazine usually list common parts and prices for immediate order. Most of them offer catalogs, either free or for the postage, and are geared up to ship your order within a day or two after receipt. They have been advertising for many years, and the acceptance of their ads by *73* on a continuing basis shows that they deal fairly with their customers.

Try to take advantage of the "two-for" offers. Even if you have no immediate use for the extra parts, keep them around and you will probably find a use for them in some future construction project.

Resistors and Capacitors

Unless the magazine article states otherwise, use half-Watt resistors. They are most commonly available, and if a higher wattage is needed, the article will say so. If you are squeezed for space, quarter-Watt units can be used—again, as long as the article says nothing to the contrary.

Don't worry about the seemingly oddball values specified. Resistors generally come with 20%, 10%, and 5% tolerances. Using 10k Ohms as an example, Fig. 1 shows the relationship between the standard values and these tolerances. Today, most people use 10% values primarily because they are the most commonly available. If the

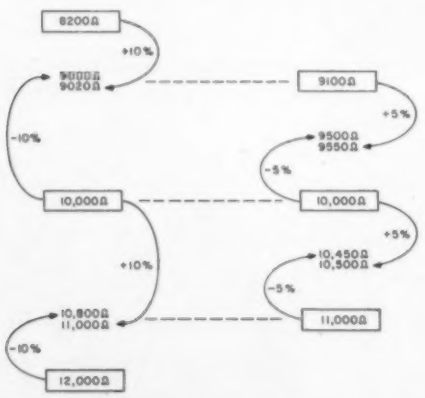

Fig. 1. Standard resistor values. Those in boxes are standard commercially-available resistors.

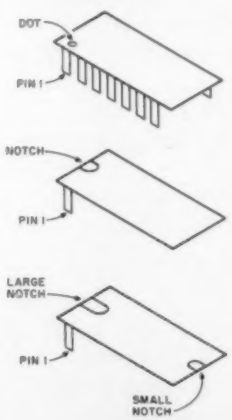

Fig. 2. IC pin locations.

RTTY/CW For the TRS-80*

* A Trademark of the Tandy Corp.

ROM-116
Now includes:
- **TEXT EDITING**
- **RTTY PICTURES**
- **SAVE TEXT TO DISK** *Detailed brochure available on request.*

Featuring:

1200 BAUD OPERATION. Not limited to 110 baud because of timing loops. 60, 66, 75 & 100 W.P.M. Plus 110, 150, 300, 600 & 1200 baud operations possible.
FLEXIBILITY OF OPERATION. Instantly change: Baud Rates; Program Mode (ASCII/Baudot); Program Status.
SPLIT SCREEN VIDEO. Transmit & receive data displayed separately.
REAL TIME. Automatic CW/ID without user intervention. Automatically updates at end of month or year.

Other features include:
- Two Serial Ports
- Fourteen Buffers
- Automatic CW/ID
- Transmit Control
- Selective Call Feature
- Error Correction & Editing
- Word Wraping
- Easy to Interface
- 30 Day Unconditional Guarantee
- Hardware Requirements: TRS-80 Model I or III 16K EXTERNAL TERMINAL UNIT REQUIRED

CROWN MicroProducts

606 State Street, P.O. Box 892-R • Marysville, WA 98270 • (206) 659-4279

THE LAST WORD IN READERS

THE NEW AEA MBA-RO

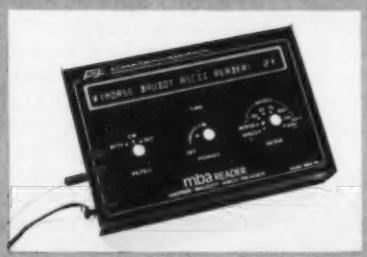

FEATURES:
- **32 CHARACTERS FOR EASY HIGH SPEED COPY OF MORSE**
- **ASCII and BAUDOT RTTY**
- **NO RECEIVER MODIFICATION NECESSARY**
- **INSTANT SPEED TRACKING FOR MORSE CODE OVER WIDE SPEED RANGE FROM 2 TO 99 WPM**
- **OPERATES FROM 12 V.D.C.**

For AEA Readers or other AEA Products, call or visit:

AEA
Brings you the Breakthrough!

Britt's 2-Way Radio Sales & Service
2508 Atlanta Street
Smyrna, Ga. 30080
(404) 432-8006

142

PERFECT ANTENNA?

FOR
10-15-20 METERS

VERTICAL
OMNI-GAIN
HALFWAVE END FED
NO RADIALS
NO REFLECTED POWER
BROADBAND
FIXED OR PORTABLE
REMOTE TUNING
2 KW PEP
UPS SHIPPABLE

R3

R3 may be the perfect antenna for condominiums, apartments, small lots or any limited space situation. It is a great antenna for hams who are concerned about neat appearance and maximum performance.

R3's self supporting radiator is only 21ft-6.4m high x 1ft .304m wide at the base. Assembly is quick and easy for portable, marine, field day, DX-peditions, or fixed installations. It is complete with remote tuner.

AVAILABLE THROUGH DEALERS WORLDWIDE

cushcraft CORPORATION
THE ANTENNA COMPANY
P.O. Box 4680
Manchester, NH 03108 USA
TELEX 953050

106

See List of Advertisers on page 114

article does not say anything else, you might stick to 10%. You can always use a resistor with a better tolerance (10% instead of 20%, or 5% instead of 10%). If you need 5% and can find only 10%, buy a handful of 10% resistors and check them with an ohmmeter to select one that falls within ±5% of the value required.

Capacitors have both a value and a voltage rating. You can always use a cap that has a voltage rating higher than the amount needed. For most capacitors, you must stick to the value needed but you can always use the larger-than-specified electrolytic cap when it is used for bypassing or filtering a power supply voltage. Just be careful to wire it in with the polarity shown in the schematic.

Transistors and FETs

Generally, you will have to stick to the type specified in the article. Substitutes can be used and you can pick a substitute by looking at the substitution guide printed by a number of suppliers and distributors. Radio Shack, GE, and Motorola all have hobby lines of transistors and substitution guides where you can look up the device you want; the guide will give you their substitute number. When you do substitute, be careful of the connections. Often a substitute will be very close to the original part electrically but will have a different mechanical package and/or lead arrangement.

Integrated Circuits

Let's assume that the circuit you are building uses a very common amplifier known as the 741. There are perhaps twenty versions of this amplifier, with twenty different part numbers. Each of the part numbers includes the digits 741, with the rest of the digits telling you the temperature range and mechanical package. For most uses we don't have to be concerned about the temperature range, but the pin numbers for connecting to the amplifier are very much of interest. Compare the pin numbers of the amplifier as shown in the schematic with the pin numbers of the actual part you buy.

Occasionally, the article will specify an amplifier such as the 741 and show it as a single amplifier in an 8-pin package. You might be able to obtain only a dual 741 or two 741 amplifiers in a 14-pin package. This is perfectly OK; just ignore the second amplifier.

Integrated circuits are available most commonly in "in-line" packages having 8, 14, or 16 pins. A round dot usually marks pin 1. Sometimes a notch tells you where pin 1 is, and occasionally you have to cope with a dot and two notches. As Fig. 2 shows, the dot takes precedence over the notch, and if there is a notch at both ends of the package, the larger notch tells you where pin 1 is.

Unlike tubes or transistors, the manufacturer's data sheets usually picture integrated circuits from the top. Therefore, when you are wiring them from the underside, remember that pin 1 is now on the other side of the package as seen from the bottom of the circuit board (Fig. 3).

Diodes

Power-supply-type diodes have both a current rating and a voltage rating. You can substitute any diode which has a rating equal to or greater than the original numbers. Small signal diodes used as switches usually can be substituted for at will. Most ham circuits use a maximum of 12 volts (sometimes labeled 13.6 volts if the equipment is for mobile use). Therefore, if the circuit calls for a small signal silicon diode, almost any other silicon diode will do. Fig. 4 shows the most common markings of the diode package.

Zener diodes, used in voltage regulators, have both a voltage rating and a power rating. You must use the voltage rating called for, but you can always use a higher-power-rated diode.

Power Supply Connections

Fig. 5 shows a simple 2-transistor amplifier. With today's solid-state circuits, usually only one power-supply voltage is used and, as shown in the figure, you simply tie the identically-marked points together and connect them to the voltage required. If the schematic does not show differently, the power-supply return lead (in this case the minus 9-volt lead) is tied back to all of the ground terminals.

Jacks

Here you can substitute at will. Just remember that the most commonly used jacks have one side exposed and will connect to the chassis (ground) if they are not insulated by wash-



Fig. 4. Typical diode markings.



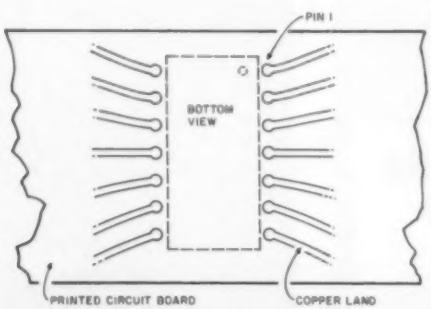

Fig. 3. Pin 1 transposition.

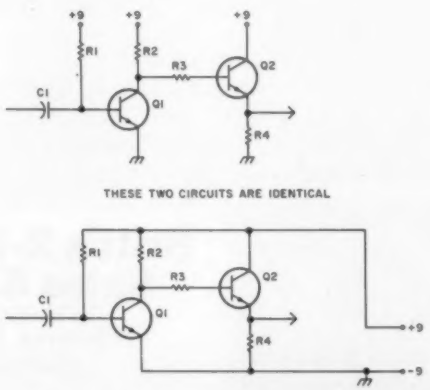

Fig. 5. Power-supply connections.

M^2 ENGINEERING'S
VHF H.T. CONVERTERS

- DOUBLE BAND HC-V, HC-U2
- SINGLE BAND HC-V220
- BI-LATERAL PROTECTION AGAINST ACCIDENTAL TRANSMISSON FOR UP TO 5 WATTS
- STANDARD BNC CONNECTORS
- HC-V 154-158 159-163
- HC-U2 460-464 480-484
- HC-V220 221-225

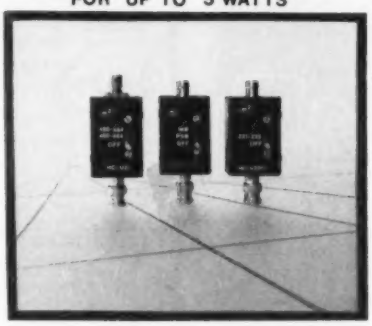

- USES SINGLE AAA CELL
- LOW LOSS COUPLING TO ANTENNA
- "OFF" RETURNS TO NORMAL TRANSCEIVER OPERATION
- SIZE: approx. 2x1.5x1.5
- WEIGHT: 3.9 ozs.

HC-U2 $72.45 HC-V220 $62.45 HC-V $47.45

M-SQUARED ENGINEERING, INC.
1446 LANSING AVE.
SAN JOSE, CA. 95118
(408) 266-9214

DEALERS WELCOME

Shipping included
Calif. residents add 6.5% sales tax

↙77

SATELLITE SYSTEM HEADQUARTERS
Don't wait. Get Your TVRO System TODAY!

- *Receivers* featuring the DEXCEL and Automation Techniques units
- *Modulators*
- *Complete* System ready to install from $2850
- *Call* today for more information

CHAPARRAL "Super Feed" feed horn **$85.00**

DEXCEL 120 low noise amplifiers **$495.00**

SATELLITE ANTENNAS

MDS POWER SUPPLIES **$35.00**

1900 to 2500 MHz Microwave Downconverters
Kit $28.50
Assembled. $48.50

ALSO AVAILABLE
Commercial M.D.S. System $169.95
SLOTTED ARRAY ANTENNA $28.50

PB RADIO SERVICE ↙404
1950 E. PARK ROW • ARLINGTON, TX 76010
CALL ORDER DEPT. TOLL FREE
(800) 433-5169
FOR INFORMATION CALL
(817) 460-7071

FT101 TS520 TS820 FILTER CASCADING

Probably the most popular units ever produced, these solidly built transceivers were built to LAST. If you can live without gadgetry, why replace your reliable time-tested rig with a costly new model? Especially since you can easily make your receiver equal in selectivity and ultimate rejection to any now on the market with an inexpensive

Fox-Tango Filter Cascading Kit!
CONSIDER THESE FEATURES

- Easy installation - 30 minute average.
- No drilling, switching, alignment.
- Results of 16 poles of filtering:
  Filter Shape Factor as high as 1.19.
  Ultimate Rejection better than 100dB.
  Works wonders on SSB; improves CW.
- Compensates for Filter Insertion loss.
- Complete instructions, clear diagrams.
- No RX audio impairment, TX unaffected.
- Fits all models of Series - any letter.
- 10% off if any four are ordered at once.

TS520 Series Order Kit No. 520K. $70
TS820 Series: Order Kit No. 820K $70
FT101 Series (not ZD): Order Kit No. 4K. . . $75
FT101ZD Series: Order Kit No. 4K-ZD . . . $75
Prices include shipping to U.S. & Canada; Overseas Air $5. Florida Sales Tax: 4%
All kits include a genuine 8-pole top-quality FT Filter, improved cascading/mini-amp circuit board, all needed parts, cables, and detailed instructions.
In addition to the above, **Fox-Tango** features cascading kits for the FT-901/2 ($65), FR-101 ($55), Heathkit SB104A ($60). Also a wide line of SSB, CW, AM, and special filters for Yaesu, Kenwood, Drake R4C and 7-Line, Heathkit, and Collins 75S-3B/C.

NEW! TS830S and R820 KITS
TS830 and R820 owners who have replaced their 1st and 2nd IF filters with a Matched Pair of 2.1KHz Fox-Tango filters enthusiastically report the following:
". . . VBT now works as I dreamed it should . . ."
". . . Results are almost unbelievable . . ."
". . . Spectacular SSB RX performance . . ."
". . . I no longer need a CW Filter. . . ."
(Names on Request)

Tests prove that high quality Fox-Tango 8-pole discrete-unit Crystal Filters are notably superior to the original units, especially the modest 455KHz second IF ceramic unit. Substitution of Fox-Tango filters result in a bandwidth of 1.9KHz at −6dB, a shape factor of 1.2, and Ultimate Rejection of at least 110dB!
(Independent Report available upon request.)
Regular Price: $55 + $125 = $180 + shipping
INTRODUCTORY PRICE (Complete Kit). . . $150
Includes Matched Pair of Fox-Tango Filters
All cables, parts, detailed instructions
10% Quantity Discount Applies
Genuine Fox-Tango crystal filters are guaranteed for **ONE YEAR**. Beware of cheap imitations; they are no bargain! Don't be fooled.

GO FOX-TANGO — TO BE *SURE!*
ORDER by Mail or Telephone. Pay by Visa, MC, M.O., Check (US$), Cash, or C.O.D.
AUTHORIZED EUROPEAN AGENTS
Scandanavia: MICROTEC, Makedien 26, 3200, Sandefjord, NORWAY
Other: INGOIMPEX, Postfach 24 49, D-8070, Ingolstadt, W. GERMANY

FOX TANGO CORPORATION
Box 15944S W. Palm Beach, FL 33406
Phone: 1-305-683-9587 ↙323

↙See List of Advertisers on page 114

WIRE GAUGE	DIAMETER IN INCHES
1	.289
⋮	⋮
20	.032
22	.025
24	.021
26	.015
28	.012
⋮	⋮
50	.001

Fig. 6. Wire sizes.

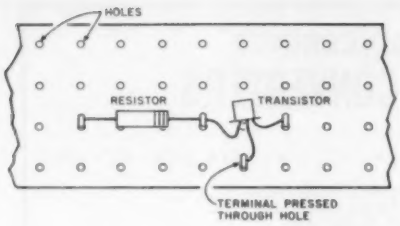

Fig. 7. Use of perfboard.

ers. If you need a two-conductor jack, and one lead is not supposed to be grounded, you will either have to mechanically insulate the outside of the jack from ground or get a three-conductor jack where you use the two inner conductors and ignore the third (grounded) lead.

Cable

If the circuit you are building is not used at VHF and a piece of coax is called for with a length of 12 inches or less, the coax is being used mainly for its shielding capability. You can safely ignore the impedance and pick a piece of coax on the basis of being able to fit it into your box mechanically.

Wire

Unless used for high-current leads, most solid-state circuits use just a few milliamperes per stage. Therefore, there is no reason to use wire sizes larger than number 22 or 24. As shown in Fig. 6, the lower the number the larger the wire diameter. Pick wire which is mechanically convenient. Soft plastic insulation strips very easily and conveniently, but if you have to solder a number of them in close proximity, the plastic tends to melt and burn, generally making a rather unsightly mess.

Printed Circuit Boards and Breadboards

Some construction articles provide either a PC-board layout or a commercial source for purchasing the board. If a layout is given, you can use the PC-board kits sold by several suppliers to make your own. However, if no board is suggested, you always can use a breadboard-type construction to build the circuit. Most hams have one or more breadboard circuits, neatly enclosed in a box, which have been operating in their breadboard form for many years. Even if your construction does not come out very neat, the flaws will be hidden by the enclosure you put the circuit in.

One of the simplest construction techniques uses perforated board such as that sold by Radio Shack, Vector, and others. The circuit is laid out just as it appears on the schematic, and every time a connection must be made, a small metal terminal or clip is inserted in a hole and the leads soldered onto the terminal (Fig. 7.).

Alternatively, general-purpose PC boards also are commercially available. They are arranged in a fixed pattern and, as shown by the dotted rectangle, integrated circuits plug in adjacent rows of holes (Fig. 8). A bus-bar system of feeding ground and voltage is used, where one bus is connected to the supply voltage and jumpered to the IC pin where required. Transistors and other parts can be mounted where convenient. A second bus is used for ground.

Also commonly available are small carrier boards which will allow you to wire up one or two integrated circuits (Fig. 9). Other parts are jumpered from one terminal to wherever required.

Generally speaking, sockets or molex® pins are a good idea for mounting integrated circuits. If you do have a problem, you can now unplug the IC and test or substitute without a massive and messy unsoldering job.

Plan It Out and Then Build

Take a careful look at what parts are required and make sure you can obtain them. Plan the layout of parts and decide what you are going to enclose the circuit in and where the jacks, connectors, and controls will be located. Don't hesitate to call for help. Often an experienced ham in the area can offer an immediate solution to your unique problem. But if this does not solve the problem, you can drop the author of the article a note. Enclose an SASE, and help will probably be on its way quite quickly. ■

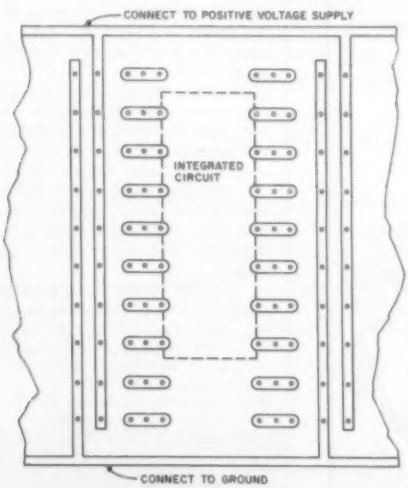

Fig. 8. Commercially-available PC board for breadboarding.

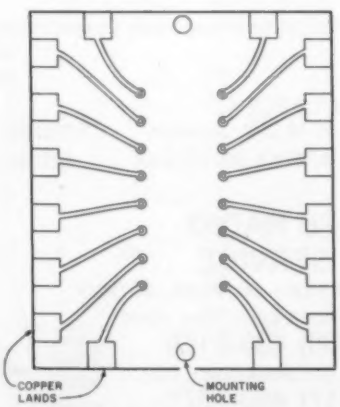

Fig. 9. Single-IC carrier board.

QUALITY parts at DISCOUNT PRICES!

STEREO 8 TRACK HOME UNIT



BRAND NEW UNITS... ASSEMBLY INCLUDES; TAPE HEAD, MOTOR BELT, 110VAC MOTOR, PRE-AMP, LIGHTS, SWITCHES, SOLENOID AND OTHER USEFUL PARTS.... AN EXCEPTIONAL BUY!

$7.25 PER ASSEMBLY

4PDT RELAY

- 16 pin style
- 3 amp contacts
- 24 volt d.c. coil
- 120 volt a.c. coil
- Used but fully tested

$1.70 EACH

specify coil voltage

LARGE QUANTITIES AVAILABLE

SOCKETS FOR RELAY 50¢ each

BLACK PLASTIC CASE

PAC-TEC SERIES C

BLACK PLASTIC ENCLOSURE ADJUSTABLE HEIGHT FROM 1.63" TO 2.93"; WIDTH 6.85"; DEPTH 8". BUILT-IN STAND OFFS FOR P.C. BOARDS..FRONT AND BACK PANELS NOT INCLUDED..

$5.25 PER CASE

MINI SIZE BUZZERS

1½ to 3 volts 75¢ ea WITH WIRE LEADS

1½ to 3 volts 75¢ ea WITH PIN TERMINALS

3 to 7 volts WITH PIN TERMINALS 75¢ each

JOYSTICK

PRECISION DEVICE... CONTAINS 4 50K CENTER TAPPED ALPS POTS.....

$4.75 each

MITSUMI MODEL UES-A55F VARACTOR UHF TUNER

FREQ RANGE 470 - 889 MHZ ANTENNA INPUT 300 OHMS

$25.00 each

10 for $220.00

750 MFD 330 V PHOTO FLASH

2" HIGH X1 1/4" DIA.

$1.25 EACH

10 FOR $11.00

SEND FOR OUR NEW Free! 40 PAGE CATALOG Free!

COMPUTER GRADE CAPACITOR

1700 mfd. 150 VDC $2.00
2 1/2" DIA X 4 3/4" HIGH

3,600 mfd.
40 VDC $1.00
1 5/8" DIA. X 5" HI

6,400 mfd.
60 VDC $2.50
1 3/8" DIA X 4 1/4"

12,000 mfd. 40 VDC $3.00
2" DIA X 4 1/4" HIGH

18,000 mfd. 75 VDC $4.00
2 1/2" DIA X 4 1/2" HIGH

20,000 mfd. 25 VDC
2" DIA. X 3½" HIGH $2.00

22,000 mfd. 15 VDC
2" DIA X 2 1/2" HIGH $2.00

22,000 mfd. 40 VDC
2" DIA. X 6" HIGH $3.00

25,000 mfd. 75 VDC $4.50
3" DIA X 4 3/8" HIGH

45,000 mfd. 25 VDC
2" DIA. X 4" HIGH $3.50

72,000 mfd. 15 VDC
2" DIA. X 4" HIGH $3.50

CLAMPS TO FIT CAPACITORS 50¢ ea

L.E.D.'s

STANDARD JUMBO DIFFUSED
RED 10 FOR $1.50
GREEN 10 FOR $2.00
YELLOW 10 FOR $2.00

FLASHER LED
5 VOLT OPERATION
JUMBO SIZE
2 FOR $1.70

BI POLAR LED
2 FOR $1.70

SUB MINI LED

.079" X .098"
20mA at 1.75v
10 FOR $1.00
200 FOR $18.00
QUANTITY PRICES AVAILABLE

TRANSFORMERS

120 volt primaries

6 VOLTS at 150 mA	$1.25
12 V.C.T. at 500 mA	$2.50
16.5 V. at 3 AMPS	$6.50
18 VOLTS at 350 MA	$2.00
18 VOLTS at 1 AMP	$4.50
25.2 VCT at 2.8 AMP	$5.50

CANNON XLRA-3-13 CONNECTOR

5 PRONG CHASSIS MOUNT CONNECTOR

$2.00 EACH
10 for $19.00

500K LINEAR SLIDE POT

2 7/8" LENGTH
1 3/4" TRAVEL
75¢ EACH

MINI BSR AUTOMATIC RECORD CHANGER

- B.S.R. MODEL C136R/C/3
- PLAYS 33/45/78 RECORDS
- MINI SIZE: 8 1/4" X 12"

INCLUDES DUST COVER AND PLASTIC CASE (NOT PICTURED) WITH FRONT CUT OUT TO FIT STEREO UNIT (NOT INCLUDED).

$17.50 each

BLACK LIGHT (ULTRAVIOLET)



G.E. 9 F6T5BL $2.50 each

170 MFD 330 V PHOTO FLASH

1½" X 7/8"
2 FOR $1.50

ALL ELECTRONICS CORP.

905 S. Vermont Ave.
P.O. BOX 20406
Los Angeles, Calif. 90006
(213) 380-8000

Mon. - Fri. 9 AM - 5 PM
Saturday 10 AM - 3 PM

TERMS
- Quantities Limited
- Min. Order $10.00
- Add $2.50 Shipping USA
- Calif. Res. Add 6%
- Prompt Shipping
- NO C.O.D.

20

For reliability...

...and increased resale value, rely on Cover Craft Dust Covers.

Try our low-cost protection for ALL your equipment . . . before it's too late.

- Protects equipment and investment.
- Great looking.
- 100's of designs.
- Extra strength heavy gauge vinyl.
- Machine stitched.
- Satisfaction guaranteed.

ONLY $6.95

See your dealer or contact:

COVER CRAFT CORPORATION 145

Box 555Q • Amherst, NH 03031 • (603) 889-6811

REACH OUT!

VoCom's 5/8 wave gain antenna:

- Dramatically boosts reception.
- Gives your hand-held full quieting from places you're nearly dead in with a rubber duck.

Here's Why It Works So Well:

In order for a 5/8 wave antenna to provide its full apparent gain over a standard 1/4 wave whip, it must not only appear as 5/8 wavelength at 2 meters, but it must also utilize a ground plane. Since you can't always operate your hand-held from a car roof or other metal base. VoCom found a way to emulate the ground plane.

At right is the circuit that does it. The coil that doubles as a base spring is tap fed, and a matched capacitor completes the resonant circuit.

The result is an antenna that, fully extended, displays better than 1.5:1 VSWR across the entire 144-148 MHz band. And, when collapsed, it is the operating equivalent of a rubber duck. (With 8 of the 10 sections extended, it is a 5/8 wave antenna at 220 MHz.)

How to tell a VoCom 5/8 wave antenna from its imitators: this cutaway shows the base spring/coil, its feed tap, and the resonant circuit capacitor. Or you can simply check the VSWR—your transmitter will appreciate the difference.

VoCom
PRODUCTS CORPORATION
65 East Palatine Road
(312) 459-3680 Prospect Heights, IL 60070 90

See List of Advertisers on page 114

Glenn Jacobs KC7M
Poverty Flat AZ 85925

Coping with PC Boards

—it's not easy to be virtuous

"Admit it. You'd really rather build it. Any idiot can plunk down a charge card."

"Well, yeah. . ."

"Glenn, if you build it, it will give you pride and experience, and you'll know how to service it yourself."

"Yeah, but. . ."

"And it wouldn't cost nearly as much, and nobody would have one just exactly like yours."

So, I'm building. And my inner voice was right about everything it said. But there are a few things it *didn't* tell me. I found out the hard way, and I'm telling you so *you* don't have to "re-invent the wheel," like I had to.

I'm building. But so help me, when I see those full-page, full-color ads and a toll-free number and the sign of the yellow and orange overlapping circles, it's hard to keep at it. I could have any equipment I want for just a phone call and twenty "easy" payments. The path of virtue is harder.

Designing It

In the first place, I don't know much about vacuum-tube circuits and even less about solid state. Fortunately, I don't have to. The League[1] publishes *Solid State Design for the Radio Amateur*. It's a "cookbook." It shows three varieties of any circuit you could want—all pre-engineered and tested.

Redesigning It

Now, even with a cookbook, I can make mistakes. In fact, it's about even odds that I will make a mistake in a one-device gadget. It is far beyond me to put forty "stages" on a board as big as a *73* cover and have them all work. I decided to put each stage on a separate board and plug 'em all into edge connectors. That way if (when!) I make a mistake, I won't have to tear everything up.

I mailed off[2] for some PC board. It took three weeks to get here. They didn't send it until my check cleared.

Whittling It

PCB is funny stuff. I couldn't trace anything on it. I couldn't find any kind of carbon paper that would make a mark. Finally I rubbed yellow crayon on the copper and was able to trace faint lines. I cut on the lines and peeled up the unwanted foil in little-bitty strips with a point of a knife. It took half a day. But it worked. I got a nice little 40m CW receiver for my trouble.

Buying It

For my next project, I just sent off for ready-made custom boards.[3] They were nice, neat, correct, beautiful, and even had the parts placement marked. They worked perfectly. I made a mate for the last project. But I wanted to do these boards myself.

I sent off for ferric chloride.[4] This time I called up and told 'em my card number and they had the stuff delivered to my door in about three days.

Mixing It

The ferric chloride is a black, gritty powder. I mixed it with hot water in a plastic jug. The water got hotter. The powder that got on my hands turned into a brown goo all by itself and began to sting. I went and washed it off. When I came back, the grit I had spilt on the floor had turned into a nasty glop. That stuff absorbs water right out of the air! I wiped it up. The floor is now permanently stained several shades of brown, black, green, and gray.

Etching It

Anyway, now I was ready to begin. Or was I? I cut out a little piece of the high-priced board and drew a circuit on it in ink. I laid it in a plastic dish and poured some of the smelly brown juice over it. An hour later it looked gritty. Two hours later it was covered with a fine black sediment. I rinsed it in the sink and every bit of copper was gone. The thing might still make a banjo pick, but it would not make a circuit.

Resisting It

I cut out another piece. This time I drew my design with a felt marker. I baptized it for two hours in the ferric chloride soup and, behold!—a printed circuit. The remaining foil was rough and gritty—about half eaten up. But it would do. Now I knew for sure what to do. Very carefully I designed the first board. I felt-marked it and laid it away in the tobacco juice. In the morning there wasn't enough copper left on the

board to tell what it was supposed to have been.

Next I tried crayon. I suppose if crayon were the only resist in the world, we might make a go of it, but we wouldn't like it. It turned out rough and ugly. By now I wasn't trying to make any particular kind of board. I just wanted to see what would get me decent results.

Cursing It

Oh! I found a lump of etchant I had missed before. I stepped on it barefoot and stained my sole brown. I said some words that stained my soul deep purple. After I cleaned up the mess, I went to bed, disgusted.

Dreaming It

Suddenly I sat up. I had dozed off and dreamed I was painting a pattern with a tiny brush. That mimeograph correction fluid! I had a whole case of it! Mimeograph correction fluid corrects by drying into a plastic film. And it comes with a handy little brush built right into the bottle lid. I put on my pants and waddled out into the dark to my store.[5] There it was, cartons and cartons of it. I brought one in and annointed a little rectangle of copper with abstract designs and flooded it with the slop from the jug.

In the morning I rinsed it off and scrubbed it clean at the kitchen sink. Beautiful. My design was perfectly preserved in glittering copper.

Sharing It

Finally I have found *The Way* to do it. And I will share it with you. Just send a dollar and a double-stamped SASE to Glenn's Trading Post at Poverty Flat, Arizona 85925. I will send you a bottle of gen-uine Army surplus correction fluid complete with a nice little applicator brush built right into the lid. Guaranteed to delight you. Correct your stencils. Paint your nails purple. Make your own PC boards. (Who knows, it may even remove warts.) This is the best stuff since snake oil. You can even see your pencil lines on the foil through the fluid.

Drilling It

By 'n by I had the first board ready for parts. Nearly ready for parts. Gotta drill it. All my drills are too big. I went to a dozen hardware stores within a hundred miles. The smallest ordinary drill bit is a sixteenth of an inch. It's positively teensy. But the components just fell out of the holes. Even after I soldered them. The best I could do was bend the leads over hard after poking them through the holes. Then they would stay in place long enough to be soldered. But the holes were so large it left a quarter-moon gap around each lead. It didn't look neat. It didn't look professional. If I had wanted a ventilated board, I would have made a pattern of round holes on purpose.

"I need a smaller drill."

"No. You need smaller holes. Or, you need to be less picky."

"All I want is a drill half that size."

"There ain't any in eastern Arizona. You need something else."

"If it drills holes, ain't it a drill bit?"

"Not necessarily."

My wife broke a sewing-machine needle as I argued with the inner voice.

"Honey, get this broken needle out for me, will you, please?"

Grinding It

I did. A broken-off sewing-machine needle looks a lot like a little-bitty drill bit. I ground a bevel on the notched side of it with a whetstone and it looked a lot more like one. I chucked the shank into my hand drill and found it would go through PCB like a hot knife through butter. It made a neat round hole with the foil pushed up around the edge like the rim of a moon crater. And, the hole was too little for a resistor lead. But sewing-machine needles come in different sizes and for a buck at the friendly local notions counter, I had an assortment of drill blanks just the right sizes for component leads.

Concluding It

You can roll your own printed circuit boards without spending a fortune on special supplies and equipment.

You can draw your pattern right on the copper with an ordinary pencil and erase it until you get it right. You can paint directly on the board with mimeograph correction fluid. You can see your pencil lines right through the purple film. You can remove it with a fingernail. When you are satisfied with your pattern, a mixture of ferric chloride and water will etch it for you. Plain water will clean it up, with a little scrubbing.

If you can't get the size of drills you need, ready-made, you can make your own out of sewing-machine needles. ■

Footnoting It

1. American Radio Relay League. Newington, Connecticut 06111.

2. There are a lot of places. I got mine from Fair Radio Sales, Box 1105, Lima, Ohio 45802.

3. Again, there are several sources. Try Circuit Board Specialists, Box 969, Pueblo, Colorado 81002.

4. Meshna, Box 62, East Lynn, Massachusetts 01904. They may be out.

5. Glenn's Trading Post, Poverty Flat, Arizona 85925.

POWER•LINE FILTERS

These filters protect any sensitive electronic equipment from power line transient damage and radio frequency interference. Both models offer surge suppression for power line "spikes". RF interference is suppressed using both inductive and capacitive components. Ideal for computers, test equipment, or TV.

LF2—A duplex outlet, 120V, 8 amps . . . **$39.95**

LF6—Three separately filtered duplex outlets, 120V, total fused capacity 15 amps, power switch and indicator lamp **$69.95**

Add **$2.50** shipping and handling per order. Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax. Charge card buyers may call toll-free: **1-800-543-5612**

In Ohio, or for information, call: **1-513-866-2421**

DRAKE

R. L. DRAKE COMPANY

540 Richard Street, Miamisburg, Ohio 45342

INSTITUTIONAL AND DEALER INQUIRIES INVITED



SATELLITE TELEVISION SYSTEMS

WE WILL NOT BE UNDERSOLD!!
Complete Systems, Antennas, Receivers, LNA's & Accessories
CALL US TODAY! ↙320

812-238-1456

hoosier electronics

"Nation's Largest Total Communications Distributor"
P.O. BOX 3300 • TERRE HAUTE, INDIANA 47803

8FT **PARABOLIC DISH**

- NO WARP, CHIP, OR DELAMINATION
- ALL-STEEL, ONE-PIECE
- ACCURATELY MACHINED
- 8'4½" OVERALL DIAMETER WITH MOUNTING RING

MOUNT AVAILABLE

Write for quantity discount

DAKOTA MICROWAVE
P.O. BOX 27002
GOLDEN VALLEY, MN 55411

AT MINNEAPOLIS MN.

AVAILABLE NOW

NEW! **AZDEN PSC-300**
TWO-METER HANDHELD

PCS-300 HT	$290.00
PCS-3000 XCVR	285.00
Remote cable	37.00
Phase II ant.	28.50
Other acc.	Call

KDK
also: 2025A Mk II (W/TT mic.) **$265.00**

Free shipping in U.S.A. for all XCVR or HT orders

B. G. CARL ELECTRONICS
11128 Claire Ave.
Northridge, Calif. 91326 ↙469
Call: (213) 363-1216—anytime

Universal Communications
A DIVISION OF INNOVATIVE LABS, INC.
P.O. BOX 339
ARLINGTON, TEXAS 76004-0339

SUPERVERTER I.....$99.95
The ultimate in converter technology! Dual-stage selective preamp, mixer, i.f. amplifier and no-drift crystal-controlled oscillator. We recommend this unit **for experienced kit builders.** 12v Stationary Power Supply...$24.95 for Superverter I.

SELECTIVE PREAMP.....$39.95
This new unit is not like other wideband preamps. Experienced kit builders can easily add this unit to our existing boards or to other manufacturers' boards to improve overall performance.

2300 MHZ CONVERTER KIT.....$35.00
Complete with PC board, parts and 10-page instruction book.

VARIABLE POWER SUPPLY.....$24.95
Complete kit includes all components for working unit, including deluxe box and overlays.

DISK YAGI ANTENNA.....$25.00
Complete kit with PVC and mounting bracket. Stronger than loop yagi, and equal in gain.

4-FOOT DISH ANTENNA.....$54.95
Overall 25 dB gain. Partial assembly required. Shipped UPS (ground) only.

TERMS: COD, Money Order, Bank Cards
HOURS: 8:30-4:30 CDST; MON-FRI

(817)-860-1641

SEE YOU IN DALLAS AND SAN DIEGO

Our product may be copied, but the performance is never equalled.

UNIVERSAL COMMUNICATIONS

P.O. BOX 339, ARLINGTON, TX 76004-0339

EARTH STATION OWNERS & DEALERS:

You've got terrestrial interference...
We've got filters!

The concrete under your new earth station isn't hard yet, but you've got trouble already—unwanted microwave signals are destroying your picture. Your customer is throwing tantrums, and you have two choices: Tear it down and eat the installation costs, or filter it.

We can help. Call us and we'll send you MTV/82, which tells how to eliminate terrestrial interference on earth stations and lists a complete line of filters designed and tested for this purpose. Created for effective use by novice and experienced earth station operators alike, MTV/82 explains each type of interference, describes the symptoms and recommends specific filters to solve your specific problems.

Products include:
- *microwave & IF bandpass filters*
- *IF traps*
- *waveguide adapters*
- *power dividers*
- *coax adapters*
- *specials!*

Call or write today and we'll also send you FG/82, *"Earth Stations & Terrestrial Interference: A Filtering Guide for the Installing Dealer."*

MICROWAVE FILTER COMPANY, INC. ↩136

6743 Kinne St., East Syracuse, NY 13057
Toll Free 1-800-448-1666 —— TWX 710-541-0493
NY/HI/AK/Canada (Collect) 315-437-3953

APPLIED INVENTION
THE SOURCE FOR SOLID STATE / STATE-OF-THE-ART

GaAs FETS by MITSUBISHI
VHF through 18 GHz

MGF-1200 (0.25dB NF at 144 MHz!)
MGF-1400 (2SK273) MGF-1402 (2SK...)
1412 (2SK275) TESTED and G...
0.8dB
1403 G... GaAs FET PRICE BREAKTHROUGH! CALL FOR NEW LOW, LOW PRICES ...ower Low Noise amp.)
NF sorted - call for data
1801 G... (150mW linear PO at 10GHz)

Microwave Modules
MITSUBISHI X BAND Hybrid Integrated Circuits with Dielectric Resonator (0.12MHz/°C) GaAs FET Oscillators
FO-1010X - 10.4 GHz, 15mw out, UER100 Flange $37.75
FO-1210Y - 11.5 or 12.0 GHz, UER120 Flange $37.75
FO-UP11KF Heterodyne receiver, 10.468 GHz LO, Shottky mixer, high or low injection $34.25
All modules tuneable ±150 MHz, oscillators can be optically FM'd with IR (suggest LD271 below)
X Band Horn antenna (15dB UER100 WR190 Flange) $16.00

Components
NEW! RETICON R5620 digitally programmed Universal Active Filter. Switched capacitor type. NO external components, 16pin DIP. $12.00

VITRAMON 7800 Microwave Rated caps for bypass-coupling
7802P7G02 0.7-1.4GHz 7800P7G04 1.3-2.6GHz
7800P7G01 2.6-4.2GHz 5 for $5.00

VOLTRONICS ultra-miniature shuttle caps and HI Q piston caps
Shuttle: **CP2** 0.1-2.5pf **CP10** 0.5-9.0pf $3.19
Piston: **ET9Q** 0.6-9pf, Q = 5000 @ 100 MHz $3.41

SOLDER-IN DISK CAPACITORS for VHF-UHF bypassing
RMC .JF series 100, 220, 470, 680pf 10 for $2.50

OPTOELECTRONICS from **MITSUBISHI** and **SIEMENS**
MITSUBISHI ML3001 LASER DIODES 3mW at 830 nm CW 30mA threshold, built in monitor $200 ea
SIEMENS: LD271 high efficiency IR LED, 15 mW $0.75
BPW 34 fast, large area PIN detector $3.00

THERMOELECTRIC HEAT PUMPS for temperature control
MELCOR FRIGICHIPS $21 - $38 Call for data

MINIMUM ORDER $5.00. ADD POSTAGE & HANDLING $3.50 on Modules (UPS) $2.50 on other items
N.Y. STATE RESIDENTS ADD 6% SALES TAX
SEND S.A.S.E. FOR CATALOG

R.D.2 ROUTE 21 HILLSDALE, NY 12529
518-325-3911 ↩71

CRAIG Star View Systems™

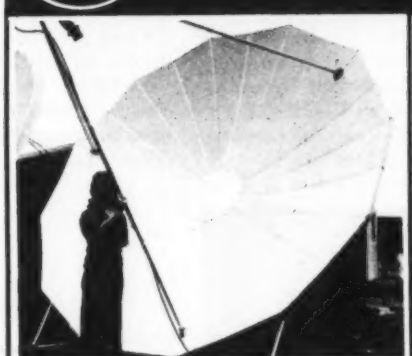

STAR VIEW MODEL 12K
- Complete System
- Easy to Install
- Reasonably Priced
- UPS Shippable Weight 125 Pounds
- More than 100 Channels Accessible

THE STAR VIEW 12K SYSTEM KIT CONTAINS:
- 12 Foot Antenna
- Azimuth Elevation Mount
- 24 Channel Receiver
- 120° Low Noise Amplifier
- Feed Horn
- Cables & Connectors
- No Modular Included (May be ordered separately for $79.95)

$2795.00

Available through your local Craig Star View dealer • Call or write for information • Dealership inquiries welcome • Price subject to change without notice.

H&R COMMUNICATIONS, INC. Subsidiary of Craig Corp.
Route 3, Box 103G
Pocahontas, Arkansas 72455
Call 800-643-0102
or 501-647-2291

↩See List of Advertisers on page 114

'Lite Receiver IV

— the second half

J. Richard Christian WA4CVP
600 Norton Drive
Satsuma AL 36572

S. F. (Mitch) Mitchell, Jr. WA4OSR
PO Box 973
Mobile AL 36601

This is the second part of a two-part article on the 'Lite Receiver IV™.* In the first installment (May, 1982, *73*), we described our philosophy for designing a home-brew receiver that can be easily duplicated. The 'Lite Receiver IV is the culmination of that design philosophy. The receiver completes the home-brew system which started with our low noise amplifier (February, 1982, *73*) and easy-to-build downconverter (March, 1982, *73*).

The first 'Lite Receiver IV installment covered the 70-MHz bandpass filter/i-f amplifier board and the video demodulator board. Also included was an interconnection diagram showing how all of the boards were connected together. In this installment, we describe the audio, automatic frequency control, and metering circuits. For ease of building, printed circuit board layouts and parts lists are provided. A source is provided for etched and drilled printed circuit boards for those not wishing to "roll their own."

Dual Audio Board

The audio circuit provides for switch selection of either 6.8-MHz or 6.2-MHz audio subcarriers from the satellites. The circuit shown in Fig. 1 is designed around Motorola MC1358 audio decoder ICs; however, RCA CA3065 or National LM3065 ICs can be used as direct replacements. The board can drive a small speaker and has a front-panel audio-level control if the speaker is used or the audio level from the MC1358s is sufficient to drive most rf modulators. Complete component cost, exclusive of the printed circuit board, should be around $15.00.

Construction

The printed circuit board and parts overlay, Fig. 2, make construction simple. We did not use sockets for the ICs; however, there is no reason not to use them with the relatively low rf frequencies involved. The coils are about $1.00 each from RCA distributors.

When building, you must decide on the options that

*'Lite Receiver IV is a trademark of Martcomm, Inc.

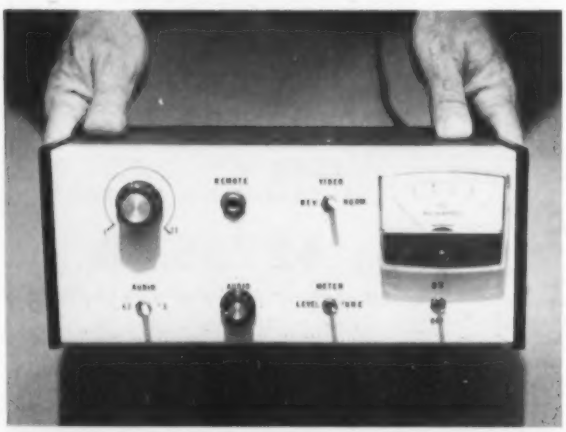

Front panel of the 'Lite Receiver IV.

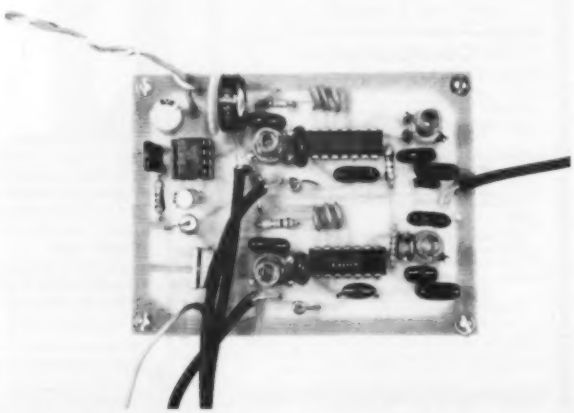

Top view of the 'Lite Receiver's dual audio board.

you want. If you do not plan to use a speaker but need audio only to drive your rf modulator, then the LM386 and its associated components can be eliminated. In that case, the front-panel level control will not be needed, but be sure to install the two 50k-Ohm printed circuit board pots since they control the amount of audio available from the MC1358s. If the LM386 is not installed, the center pole of S1 is connected to a rear-panel jack for connection to your rf modulator. If the LM386 is installed, then the output of the LM386 is connected to the rear-panel jack for connection to a speaker or to your rf modulator. We use the complete circuit as shown so that a small speaker can be used when we carry the receiver out to the antenna to make adjustments.

If you decide that you want the speaker drive capability, replace the two 50k-Ohm PC board pots with 10k-Ohm, quarter-Watt resistors. The 10k-Ohm resistors provide fixed attenuation of the audio level from the MC1358s. The front-panel control is then used for audio level for both the LM386 and your rf modulator.

Note that picofarad-size capacitors are silver mica, with all other capacitors ceramic or electrolytic.

Tune-Up Procedure

For tune-up, it is necessary to have a signal generator or use a signal off the air. If your signal generator has modulation capability, enable the modulation and tune the output of the generator for 6.2 MHz. Tune L1 for maximum audio level and L2 for best audio (which probably won't be very good because most signal-generator modulation is AM). If the signal generator is CW only, then tune both L1 and L2 for maximum quieting. If the LM386 was omitted, adjust the 50k-Ohm pot for correct modulation level for your rf modulator.

To tune the 6.8-MHz circuit, simply repeat the above procedure with the signal generator set for 6.8 MHz and tune L3 and L4 as described.

Off-the-air tune-up can be performed using the same procedure as above. However, video will have to be detected by the video demodulator board since the audio is a subcarrier riding on the video signal. If the signal-generator tune-up method is used, it still will be necessary to fine-tune once you have a signal off the air. Simply adjust for best audio quality.

If the LM386 and a speaker are used all the time, be sure to heat-sink the voltage regulator and the LM386. This completes the audio section of the receiver.

Afc/Metering Board

The afc/metering board gives afc control for the mix-

PRINTED CIRCUIT BOARDS

Printed circuit boards are available from Martcomm, Inc., PO Box 74, Mobile AL 36601. The dual audio board is $12.00 and the afc/metering board is $15.00. Add $1.75 per order for first class postage.

DUAL AUDIO BOARD
Parts List

2 MC1358 ICs. See text.
1 LM386 IC
1 7812 voltage regulator
2 50k-Ohm PC board mount pots. See text.
1 10k-Ohm pot, panel mount. See text.
1 10-Ohm, ¼-Watt
2 220-Ohm, ¼-Watt
2 10k-Ohm, ¼-Watt. See text.
2 4-pF silver mica
2 12-pF silver mica
2 27-pF silver mica
2 33-pF silver mica
7 .01-uF disc ceramic
4 .047- or .05-uF disc ceramic
1 .05-uF disc ceramic
3 1-uF electrolytic
1 10-uF electrolytic
1 100-uF electrolytic
1 SPDT switch, panel mount
2 coils, L1 and L3, transformer-sound/i-f, stock number 130120, from RCA PM200 sound board.
2 coils, L2 and L4, coil-discriminator, stock number 130121, from RCA PM200 sound board.
1 printed circuit board, single-sided, G-10, available from Martcomm, Inc., PO Box 74, Mobile AL 36601.

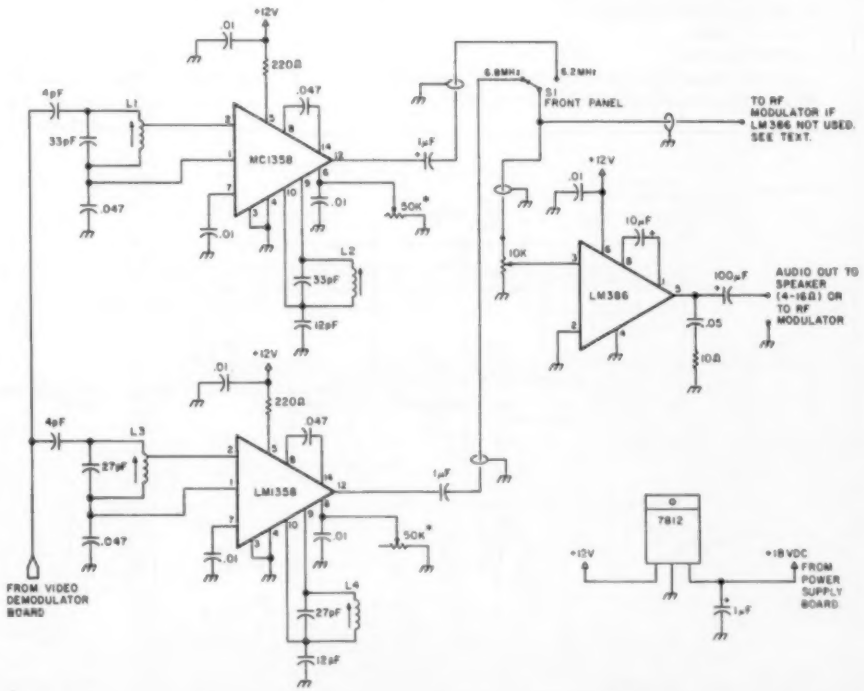

*Fig. 1. Dual frequency audio demodulator and amplifier schematic. *See text. All pF capacitors are silver mica. All others are disc ceramic or electrolytic.*

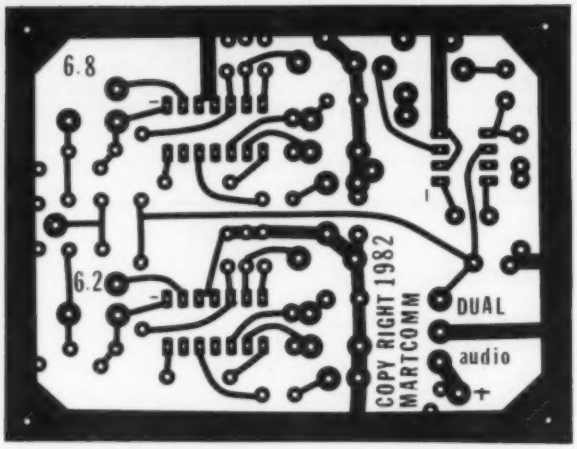

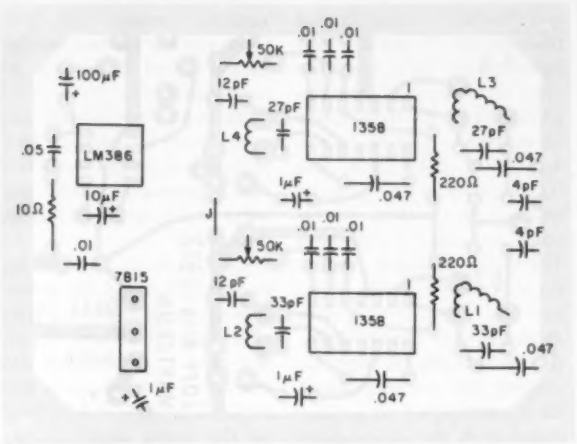

Fig. 2. PC board and parts layout for the dual audio board.

AFC/METERING BOARD
Parts List

1 LM324 IC
1 1k-Ohm PC board pot
2 5k-Ohm PC board pots
1 5k-Ohm panel mount pot
1 10k-Ohm PC board pot
2 1k-Ohm, ¼-Watt
2 2.2k-Ohm, ¼-Watt
6 10k-Ohm ¼-Watt
1 1 megohm, ¼-Watt
3 .01-uF disc ceramic
1 .022-uF disc ceramic
2 1-uF electrolytic
1 47-uF electrolytic
2 1N270 germanium diodes
1 0-1-mA meter
2 SPDT switches
1 printed circuit board, single-sided, G-10, available from Martcomm, Inc., PO Box 74, Mobile AL 36601.

er local oscillator (vto) and provides drive for a relative signal-strength meter.

The signal-strength meter is not a necessity for the receiver. Still, meters seem to impress people and we are no exception. It does serve a very useful purpose, however. The meter comes in handy for adjusting your LNA and antenna, and it gives a relative indication of signal to noise for your complete system.

As can be seen from the schematic in Fig. 3, there are four op amps used on the board. We needed three for the afc circuitry, so one was left over. We decided to put it to use to drive the meter. The 70-MHz output from the i-f filter amp is picked off through a coaxial tee coupled with a .01-uF capacitor. The rf is then fed to a voltage doubler composed of two 1N270 germanium diodes. The dc from the voltage doubler goes to an op amp connected as a non-inverting buffer. The op amp drives a 0-1-mA relative signal-strength meter.

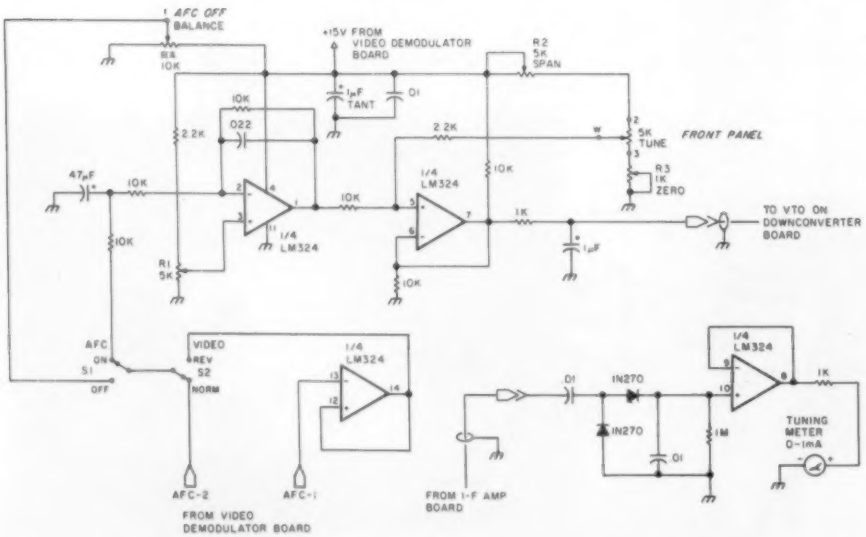

Fig. 3. Afc/metering board schematic.

Afc Circuit

The automatic frequency control (afc), like the metering circuit, is not an absolute necessity. But it sure is nice to have it lock the vto onto a transponder, as the vto does drift in frequency due to ambient temperature fluctuations.

It was decided to provide for afc with normal or inverted video. There is not much inverted video on the satellites, but occasionally you do run across an "upside-down" transponder. Also, on a single-conversion system such as ours, it is possible to tune in the image of a transponder. But if the video switch is in the "NORM" video position, the afc will "push" the image signal away instead of locking onto it.

Refer to the schematic in Fig. 3. At the afc sample

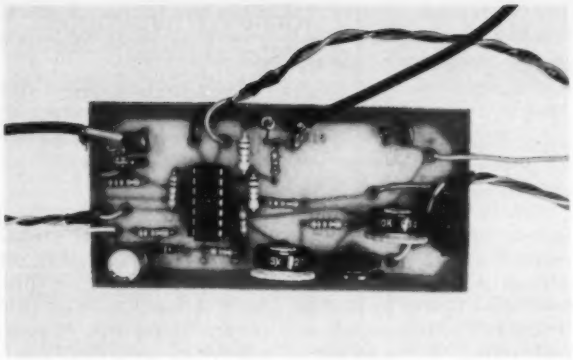

The 'Lite Receiver's afc/metering board.

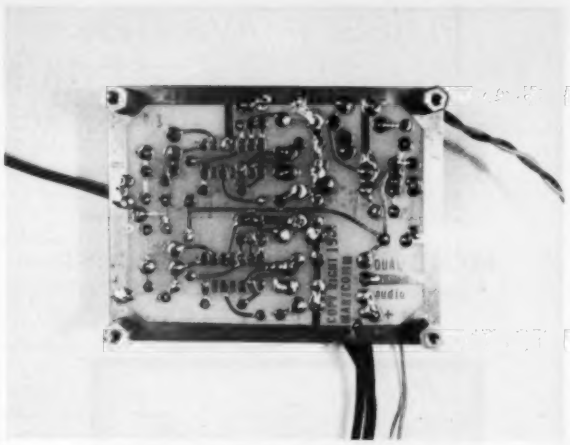

Bottom view of the dual audio board.

point, AFC-2, we are not detecting a peak or a null, but instead a dc level which is compared to a reference signal at pin 3 of the LM324 quad op amp. The first op amp in the chain is wired as a non-inverting voltage comparator. Its output is summed with the transponder tuning pot voltage to supply the tuning voltage for the vto in the downconverter (mixer). A span pot, R2, and a zero pot, R3, are provided to calibrate the transponder tuning pot, since vtos have different voltage-to-frequency ratios.

The third op amp is used as an inverting buffer for inverted video. As can be seen on the schematic, the video normal/reverse switch is a double-pole, double-throw switch. This switch reverses the afc action when you switch from normal to inverted video. Also, provision was made to turn the afc off but not change the transponder tuning pot calibration. R4 sets the afc reference level the same as the afc voltage of a properly tuned transponder when the afc is switched off.

Construction

A printed circuit board layout and parts overlay are shown in Fig. 4. There is nothing critical about the construction of this board. Just use good soldering technique and keep components flat against the printed circuit board. Use an IC socket for the LM324 since tune-up of the board is done before the LM324 is installed. Do not connect the tuning pot wiper to point "W" on the PC board yet.

Tune-Up

Connect the tuning-pot wiper to the vto at this time. Connect the AFC-1 and AFC-2 points to the video demodulator board. Connect to the +15 volts regulated and dc ground return on the video demodulator board. Set the video switch to "NORM" and the afc switch to "ON."

With the LM324 unplugged, test for +15 volts at pin 4 of the LM324 socket. Tune in a transponder and measure the voltage at pin 2 of the LM324 socket. Move the meter probe to pin 3 on the socket. Then, using R1, set the pin 3 voltage to equal the pin 2 voltage. Now switch the afc switch to the "OFF" position. With the afc switched "OFF," set the pin 2 voltage with R4 to the same voltage as with the afc switch "ON." Now, remove power and plug or solder in the LM324. Connect the tuning-pot wiper to point "W" on the afc board, and connect the afc board output (marked vto) to the vto. Be sure to use coax or well-

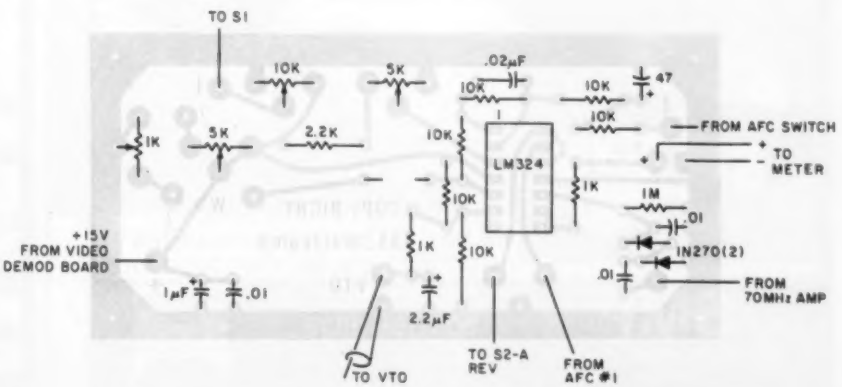

Fig. 4. PC board and parts layout for the afc/metering board.

shielded cable to connect the output of the afc board to the vto. (Usually, the vto will be remotely mounted in the downconverter, located at antenna.) The afc board output is controlling the voltage-controlled oscillator in the mixer, so any stray signal or noise spikes picked up by the cable will result in the vto being "modulated" and will cause it to change frequency with very undesirable effects on the picture.

With the afc switch "ON" and the video switch set to "NORM," the tuning pot will act like a channel switch. As the tuning pot is rotated, the afc will try to hang onto a transponder as long as possible; then, it will "jump" to the next transponder. Because of the "jump," the effect is to "switch" transponders! Finally, adjust the zero pot, R3, to set transponder #1 close to full counterclockwise position of the tuning pot. Adjust the span pot, R2, to set transponder #24 close to the full clockwise position of the tuning pot.

Now, with a 0-1-mA meter connected to the meter output, tune in a transponder and impress people.

Rf Modulator

We have not described the rf modulators that we have tried since we just haven't found a circuit that we are happy with. At present, we are using the rf modulator in our RCA video tape players. The rf modulator therefore costs only four times what the complete 'Lite Receiver IV costs!

Correspondence

Because of the complexity of the 'Lite Receiver IV, we may not have answered all your questions. We'll be glad to try to answer any questions that you might have if you include a self-addressed stamped envelope and are patient in awaiting a reply.■

PLESSEY-AVANTEK

PLESSEY INTEGRATED CIRCUITS

SL1610 RF Amplifier	3.05	SL1623 AM Det/AGC Amp	6.11	SL1640 Double Bal Mod	4.07
SL1611 RF Amplifier	3.05	SL1624 Multimode Det	6.17	SL1641 Receiver Mixer	4.07
SL1612 AF Amplifier	3.05	SL1625 AM Det/AGC Amp	6.07	SL1680 Xtal Maint Ckt	5.45
SL1613 Limiting Amp	6.38	SL1626 VOCAD/Sidetone	3.72	SL6600 IF Amp/Det	6.78
SL1621 AGC Gen	6.07	SL1630 AF Amp	6.14	SL6640 FM Rcvr W/Amp	8.41
SL1622 AF Amp/VOG	3.72	SL1631 AF Amp	6.07	SL6650 FM Rcvr W/O A	3.39

AVANTEK GPD SERIES AMPLIFIERS

(GPD 401,402,403) $25.00 EA.

12 - 16 dB Gain 5-500 MHZ.

CIRCUIT BOARDS FOR GPD 400 SERIES AMPS $2.00 ea.

AMATEUR

MICROWAVE DOWNCONVERTER

COMPLETE ASSEMBLED READY TO INSTALL NOT A KIT

SPECIAL $179.95

INCLUDING SHIPPING (U.P.S.) VISA AND MASTERCARD ACCEPTED

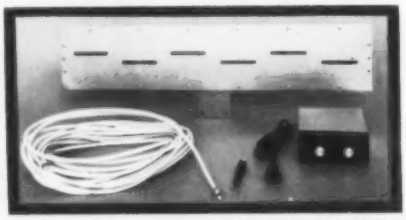

50+ dB SYSTEM GAIN
TUNES 2.1 Ghz. to 2.4 Ghz.
PREAMPLIFIER 20+ dB GAIN @2.5 dB NF
OUTPUT TUNES TV CHANNELS 2 TO 6

OUTPUT IMPEDANCE 75 OR 300 OHMS
FULL YEAR WARRANTY
PERFORMANCE GUARANTEED OR
YOUR MONEY REFUNDED

CALL (804) 489-2156 ⌐447

ELECTRONIC HOBBY INNOVATIONS

7510 GRANBY STREET SUITE 207 NORFOLK, VIRGINIA 23505

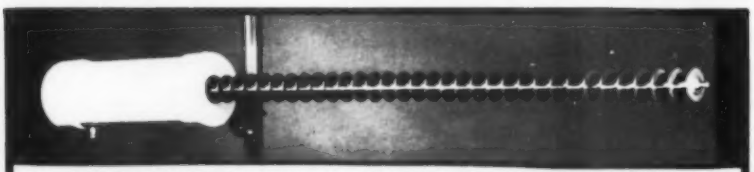

2300 MHZ *QUALITY KITS THAT PERFORM!*

UCC-1 DOWNCONVERTER KIT $35.00
Includes quality PC board, NE02137 xstrs, matched diodes, molded coils, all PC board parts, .141 semi-rigid coax, and 12 page instruction book. 22 db gain; 5.5 db NF.

UCC-2 DOWNCONVERTER KIT $42.00
The UCC-1 with NE64535 high gain RF transistor.

SMC-1 DELUXE DOWN CONVERTER KIT $43.00
The UCC-1 kit with extras. Includes thermal drift stabilization, low-temp solder, F-61 and F-59 connectors, TV matching xfmr, plans for many types of antennas, and very detailed 26 page instruction manual. Recommended for the first time builder.

SMC-2 DELUXE DOWNCONVERTER KIT $50.00
The SMC-1 with NE64535 high gain RF transistor.



RFA-1 2-STAGE SELECTIVE PREAMP $39.95
"Stopsign" shape mates with downconverter board. Selective filter reduces image noise. 16 db net gain.

TU-8 DELUXE POWER SUPPLY KIT $39.95
Quality case and smooth tuning MIL spec. pot. Complete with 2 ft. cable & matching xfmr. Other power supply kits from $27.95.

ANT-4 DISK YAGI ANTENNA KIT $30.00
32 element disk yagi with 12 inch weatherproof housing. Now includes adjustable mounting bracket! (Threaded rod not included).

SEND SASE FOR CATALOG.

WE PAY ALL SHIPPING CHARGES
DISCOUNTS ON ORDERS OVER $100.

SMP
Superior Microwave Products, Inc.
P.O. Box 1241
Vienna, Virginia 22180

ORDERS ONLY
800-368-3028
Information & Orders ⌐376
From VA. & Wash. Metro Area Call 703-255-2918

VISA
master charge

Alaska Microwave Labs

4335 E. 5TH STREET ANCHORAGE, ALASKA 99504
(907) 338-0340 ⌐406 DEPT 73

CHIP CAPACITORS

12, 2.2, 3.3, 4.7, 6.8, 10, 18, 22, 27, 47, 100, 120, 180, 220, 270, 330, 390, 470, 560, 680, 820, 1K, 1.2K 1.8K, 3.9K, 8.2K, 10K, 100K $.60

GaAs FETS

MGF1400 NF 2.0DB @ 4GHZ MAG 15DB $19.00
MGF1412 NF 0.8DB @ 4GHZ MAG 18DB $85.00
MCF1200 NF 1.0DB @ 1GHZ, NF 2.2DB & MAG 14DB @ 4GHZ $14.00

COAX CONNECTORS

BNC CHASSIS MOUNT SQUARE FLANGE	$1.95
BNC PLUG FOR RG-58	$1.95
SMA CHASSIS MOUNT SQUARE FLANGE	$6.10
SMA CHASSIS MOUNT PLUG SQ. FLANGE	$8.50
SMA CHASSIS MOUNT STRIP-LINE TAB	$6.75
SMA PLUG FOR RG-58	$6.75
SMA PLUG FOR RG-174	$6.75
SMA PLUG FOR .141 SEMI RIGID	$3.98
TYPE N CHASSIS MOUNT SQUARE FLANGE	$3.75
TYPE N PLUG FOR RG-9/RG-8	$3.75
TYPE N DOUBLE MALE	$7.25
TYPE N FOR .141 SEMI-RIGID	$15.00
TYPE N CHASSIS MOUNT PLUG SQUARE FLANGE	$14.00

SILVER PLATING KIT

Will plate Copper, Brass, Bronze, Nickel, Tin, Pewter, Gold, and most white metal alloys. $36.00

VTO

V72T-1 2.7GHZ TO 3.2GHZ MIN POWER OUT 10 MW $98.00
TUNING VOLTAGE 0 TO 20V Vcc +15 VDC @ 60 MA
V82T-1 SAME AS V72T-1 BUT FREQ.3.6GHZ TO 4.2GHZ $98.00

TEFLON CIRCUIT BOARD DBL SIDED 1 OZ

APPROX. 3.25" x 5.0" x .010	$5.50
APPROX. 3.25" x 5.0" x .0312	$6.50
APPROX. 3.25" x 5.0" x .0625	$10.50

FEED-THRU CAPACITORS

1000 PF SOLDER TYPE	$.50
470 PF SOLDER TYPE	$.50

LEADLESS CERAMIC CAPACITORS

1000 PF	$.25

NO WARRANTEE ON SEMICONDUCTORS

OPEN AT 8 PM EST CLOSED 8PM PST
ORDERS ARE POSTAGE PAID
COD - VISA - MASTERCHARGE

MICROWAVE TELEVISION SUBSCRIPTION TELEVISION

MICROWAVE TELEVISION EDUCATION MANUAL $16.25

Our updated manual includes microwave concepts, antennas, and downconverters. Includes detailed schematics and P.C. board layouts.

SUBSCRIPTION TELEVISION EDUCATION MANUAL $14.95

Two scrambling & decoding systems are explored in depth. Signal capture and modification techniques are presented for educational analysis.

AMATEUR MICROWAVE RECEIVER SYSTEM $169.95

Continuing in the high quality and performance that you've come to know in the HMRII, this receiver has a new design and increased gain.

INFORMATION PACKAGE ON ALL VIDEO PRODUCTS AND KITS $2.00

ORDER INFORMATION:

Please add 5% shipping and handling. CA residents add 6% or 6.5% sales tax. **VISA** and **MASTERCARD** accepted.

ABEX
P.O. Box 26601-G ↙114
San Francisco, CA 94126-6601

SATELLITE TVRO

RECEIVER COOKBOOK

- Build a good, solid understanding of satellite receiver technology.
- Step by step guide of each stage.
- Complete theory, schematics, and construction details.

TVRO RECEIVER KIT

- Pre-assembled, tested RF section.
- No complex alignment or special test gear required.
- Ultra-low cost/high performance.
- Designed from cookbook circuits.

* * *

$9.95 ..... Cookbook
$159.95 ..... Cookbook plus Kit

Send to:

NORTH COAST MICROWAVE
PO Box 5663, Cleve., Ohio 44101 ↙107

Dual Stage Microwave Preamplifier

Install the **Ampire 2001** in your microwave receiving system to improve the noise figure and system gain.

- 2.0 to 2.6 GHz band
- 3.5 dB noise figure
- 22 dB gain
- 12 to 18 vdc
- 30 ma current
- Zener regulated
- Diode protected
- Interface cables included
- 90 day warranty
- Fully assembled, NOT a kit!

NEW

Ampire 2001 ..... $129.95
Ampire 2001N $149.95
Shipping: USA...$2.00 Foreign...$10.00

MasterCard VISA

TEM Microwave Corp
22518 - 97th Avenue No
Corcoran, MN 55374
612-498-8014 ↙135

Your own satellite TV system for $2,586.00

10 FT. PARABOLIC

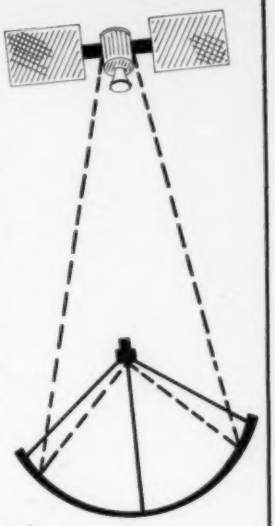

What the system will do:

You can receive up to 60 channels of T.V. direct from satellites to your home receiver. Movies, sporting events, religious programs, other T.V. stations, and much more.

What the system includes:

1. 10 ft. fiberglass dish made of reflective metal bond with fiberglass. Weather-resistant and virtually maintenance-free. Dish comes in 4 sections.
2. Single pedestal heavy duty polar mount for extra strength and installation simplicity; easy satellite to satellite adjustment.
3. Four pole rotator mount for more stability, square tube legs and rotator included.
4. All aluminum LNA mount and horn holder for accurate aiming of LNA. All aluminum, weather-proof LNA cover.
5. Drake ESR-24 Receiver or Auto-Tech Receiver. Your choice. Down converter located at the dish.
6. Amplica or Avantek LNA 120°.
7. Chapparel Feed Horn for unsurpassed quality.
8. All accessories included.

ALSO 13 FT. PARABOLIC DISHES

Complete Systems, Receivers, Antennas, LNA's & Accessories
CALL US TODAY! 901-795-4504

TENNESSEE ELECTRONICS
—P.O. BOX 181108—
MEMPHIS, TENNESSEE 38118
↙109

The Luly ANTENNA and POLARIZER

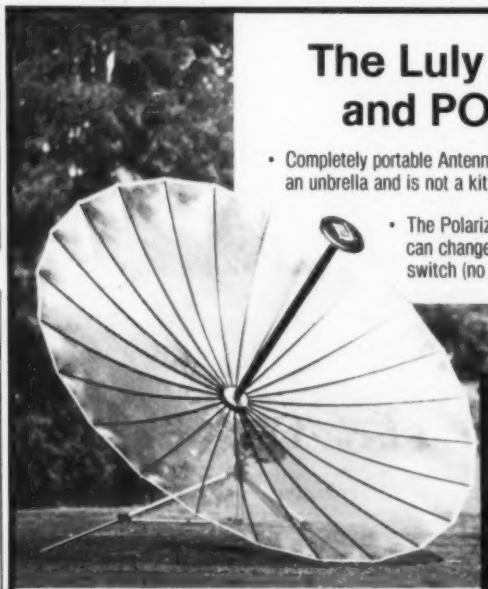

- Completely portable Antenna, comes fully assembled (folds like an unbrella and is not a kit).
- The Polarizer is an electronic rotator, which can change polarities with a flick of a switch (no moving parts). Eliminates weight, twisting cables, freeze ups, and down time.



For More Information Write To:

↙53

LULY TELECOMMUNICATIONS CORP.
P.O. Box 2311, San Bernardino, California 92406
(714) 888-7525
Dealer and Distributor Inquiries Welcome

↙See List of Advertisers on page 114

J. Richard Christian WA4CVP
600 Norton Drive
Satsuma AL 36572

S. F. (Mitch) Mitchell, Jr. WA4OSR
PO Box 973
Mobile AL 36601

TVRO Transducer

—waveguide-to-coax transition

Trans-duc-er (trans-doo'-sar) n. Any device through which the energy of one power system may be transmitted to another system, whether of the same or a different type.

Now that you know the dictionary definition of a transducer, let's look at the satellite TV definition: the gizmo that hooks the antenna horn to your LNA.

Simply stated, the transducer is a section of waveguide 3/4 of a wavelength deep with the back closed. The waveguide is a transmission line and has a velocity factor different from that of free space. A signal-pickup probe is installed 1/4 wavelength from the back (closed end) and 1/4 wavelength from one side of the box. The 1/4-wavelength spacing ensures that any 4-GHz energy that gets past the probe and is reflected from the back of the box to the back side of the probe will be in phase with the signal arriving "head on," since 1/4 wavelength from the probe to the back of the box plus 1/4 wavelength from the back of the box back to the probe equals 1/2 wavelength. The 1/2-wavelength spacing minimizes phase distortion and signal cancellation.

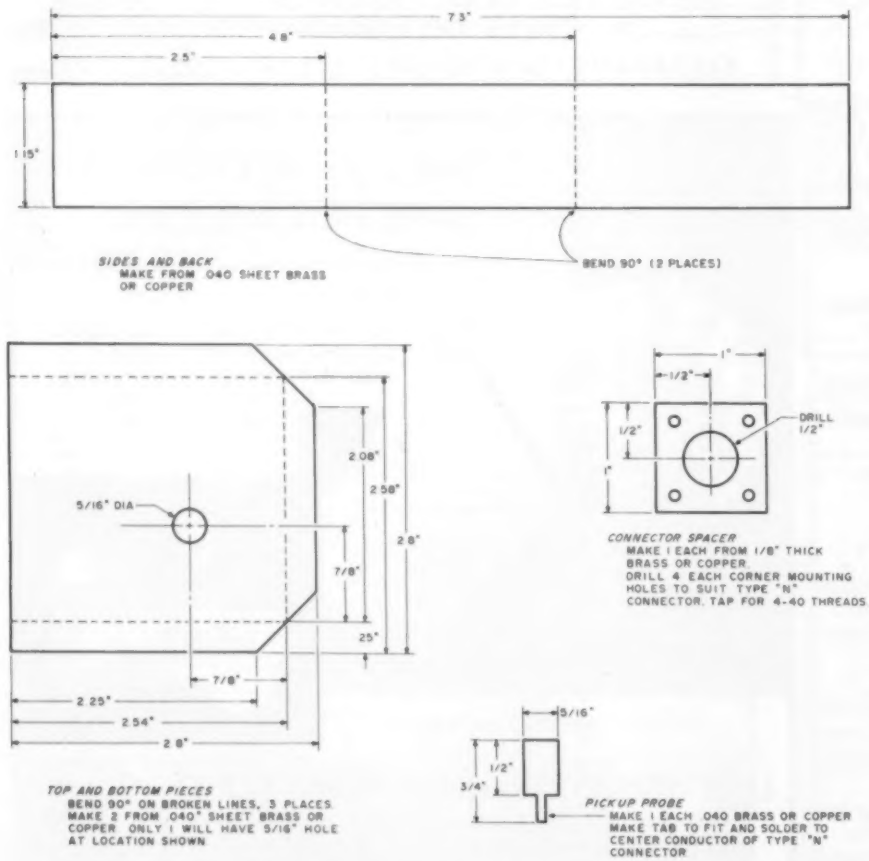

Fig. 1. Parts dimensions and bending instructions.

Two Methods

Our transducer can be built in one of two ways. If you are lucky and can find some 4-GHz copper waveguide, most of the work is already done for you. Just cut off a 2.5" section of the waveguide. Take a scrap piece of waveguide and cut a piece to fit the back of the 2.5" piece. Solder the two pieces to form a box with one end open. Make sure

that no solder gets inside the box. Using the instructions below, prepare and install the 1"-square piece, the probe, and the coax connector. This waveguide method was used to build the transducer in the photo.

If you are not lucky enough to have a friend with a source of waveguide, you will have to "bend" your own. The material needed is .040" brass shim stock or sheet flashing copper. Most large sheet-metal shops have small scraps of such material that can be purchased at a very reasonable price.

Cut the 7.3"×1.15" piece of material and bend it to a U shape as shown in Fig. 1. Cut two pieces 2.8"×2.8". (You probably can get the sheet-metal shop to cut the material with their shear for good clean edges.) Bend the edges of the two pieces 90 degrees as shown in Fig. 1.

Drill one 2.8"×2.8" piece as shown. This piece will be the bottom of the box, so that looking into the front of the box, the probe hole will be in the bottom on the right-hand side. The photo shows how the probe is offset.

Thoroughly clean all pieces in preparation for soldering. Assemble the three pieces to form the box, and clamp or wire them together. If necessary, slightly bend the U-shaped piece outward to ensure a tight fit when the top and bottom pieces are installed. With a large soldering iron or small propane torch, solder all seams. Be sure that *no* solder gets inside the box. If any solder gets inside, clean it out; you want a very smooth surface inside the box to minimize interference with the signal energy.

Installing the Probe

The 1"-square connector spacer (see drawing) must be made from 1/8" brass or copper. Drill a 1/2-inch hole in the center of the 1" piece. Then, using the type N chassis-connector mounting holes as a guide, drill and tap the piece for 4-40 screws. Sweat-solder the 1"-square plate centered over the 5/16" hole in the bottom of the box (now, transducer!). Cut the pickup probe from .040" brass or copper scrap to the dimensions shown in the drawing. Solder the probe to the center connector of the type N connector. The distance from the connector flange to the end of the probe is 13/16".



End view of a transducer made from copper waveguide. Note the clean, smooth interior.

Now install the connector to the waveguide, using 4-40 screws, making sure that the flat side of the probe is toward the front of the waveguide.

Connecting to the Horn

After constructing your transducer by the easy or hard method, you still have to mechanically connect it to your antenna horn. This is where a WR-229 waveguide flange comes in real handy. If you don't have access to a WR-229, you can make one from 1/8" brass or copper. Mild steel also could be used, but is more difficult to solder. Refer to Fig. 2 for the dimensions if you have to make your own.

Solder the flange flush to the front of the transducer. Sand or file off any excess solder for a smooth transition from the flange to the transducer. Drill mating holes in the flange to mate with the flange on your horn. We use .141" hardline coax from the transducer to the LNA. This small coax can be bent easily so that the LNA can be installed directly behind the transducer.

Final Comment

We have heard of several people building horns and transducers from double-sided printed circuit board. We have gone the PC-board route, but with very poor results. Stick with the sheet copper or brass and you should get good results with a minimum of trouble. Good transducing! ■

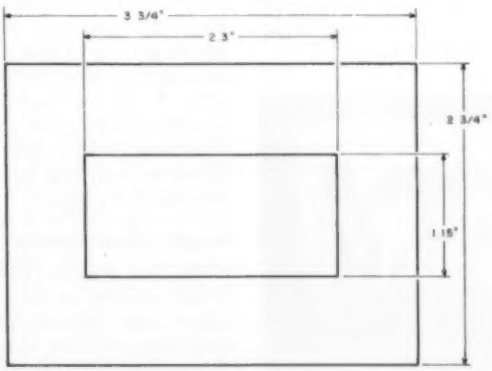

Fig. 2. WR-229 waveguide flange dimensions. Flanges may be purchased or made from sheet brass or copper 1/16" thick or heavier. While not absolutely necessary, some method must be used to mate the transducer to the horn. Solder the flange flush with the transducer.

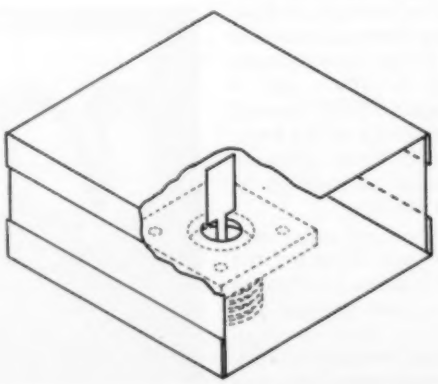

Fig. 3. Three-D drawing of the transducer.

Stephen Gibson
PO Box 38386
Hollywood CA 90038

The MTV Music Box

—Satellite Central, part VII

Part of the fun of TVRO experimenting is searching for new signals. While video is an easy mark, the real gold is sometimes harder to find, especially since new services keep popping up. The "video records" are a good example. Slide by transponder 11 on Satcom 3 (131 degrees west), and you'll find Music Television (MTV), a cable service from Warner Amex.

You may wonder why you are seeing rock groups blasting their brains out in near silence. It's because the audio portion of MTV is not on your typical TVRO receiver outputs of 6.8 or 6.2 MHz. Instead, different subcarrier frequencies were picked. Security? Perhaps.

Rock and roll music may not be your cup of tea, but the MTV delivery technique may become popular and worthy of more investigation since it is sent in stereo. And more important, you can experiment with a neat trick that mighty Warner never thought of!

Stereo Trickery

Just having two sound detectors to get stereo isn't enough. You need a decoder, too. Don't bother with a stereo FM-decoder setup because it won't work. MTV combines both channels, L+R, on one subcarrier and sends the difference between the channels, L−R, on the other subcarrier.

You can hear the sum channel on a 6.62-MHz subcarrier and the difference on 5.8 MHz. All you need to do is a little addition and subtraction with the electronics, and voilà. . .they separate into left and right! If you add the L+R signal to the L−R signal, the +R and the −R cancel, leaving just L, or 2L, if you want to be technical about it.

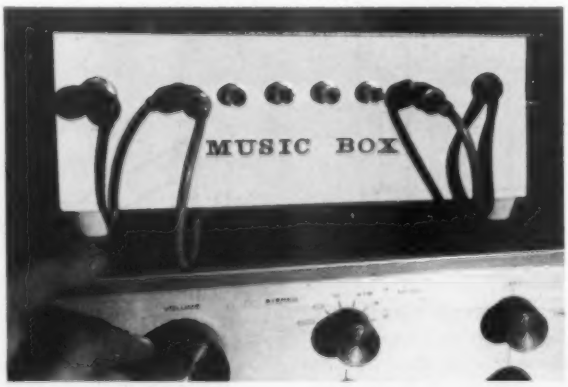

Photo A. Front view of the Music Box.

Likewise, if you subtract L+R from L−R, you get just 2R. The secret to all the addition and subtraction is a "matrix," which is a short and fancy way of saying two op amps from Radio Shack.

Before you rip the top off your receiver and start tweaking, you should consider an option. Why not build two more sound sections plus whatever else is necessary in a separate box, sparing your receiver? Don't worry if you are a Novice or your last project was an old tube-type Selecto-Jet. I've found an easy way for you to build this gadget.

Simple Circuit Details

The unit connects to your TVRO receiver at the same place your internal sound subcarrier-detector circuits tap off. Referring to Fig. 1, the detected composite video with audio subcarriers is coupled to two separate subcarrier sound detectors. One detector is tuned to

6.62 MHz and will give you an L+R output. The other detector is tuned to 5.8 MHz and delivers an L−R output. Each detector output feeds two op amps. I used a TL084 because it is cheap (available at Radio Shack) and works rather well. You get four amplifiers in a single chip. That sure beats the 6SN7 that some of you may remember.

A portion of the L+R detector output feeds the inverting input of the top op amp in the diagram. The L−R detector output feeds the non-inverting input. As in typical op amp fashion, its output is just the difference between the two inputs. So much for the subtraction part of the matrix. Addition is performed in the bottom op amp by summing the L+R and L−R detector outputs into the inverting input. Isolation is superb in this configuration because the inverting input is driven towards ground.

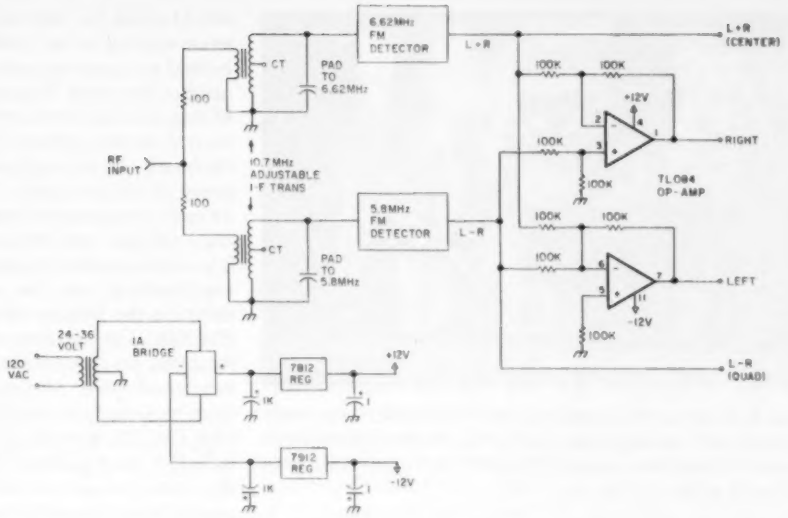

Fig. 1. Two PM-200 subcarrier detectors and a TL084 op amp are all you need to hear MTV satellite stereo.

An Evening Project

The subcarrier-decoder circuits in May's edition of "Satellite Central" will work very well. You can make a PC board for two detectors or use perf-type vectorboard and hand-wire the circuit in record time. Or you can even buy some dual-sound-section subcarrier PC boards from one of the 73 advertisers and just stuff 'n solder.

But if you are in a rush (and who isn't, nowadays) or if you are just learning about electronics, I suggest you take the lazy way and simply buy two RCA XL-100 sound-section modules like those described last month. Servicemen call them PM-200s. These little modules are complete TV-set sound sections and simply plug into the popular XL-100. Of course, they are tuned to 4.5 MHz (TV sound), but we can tweak them to the frequencies we want. In fact, we can modify them so that we get pretty hi-fi, too. Get two RCA MAA001As from a local RCA distributor. They run about 15 bucks each. You may be socked with a $3.00 dud charge.

Modification of the PM-200/MAA001A modules is very easy. We simply reduce the values of two capacitors so that we can tune higher than 4.5 MHz and then add two more capacitors to get better sound. Referring to Fig. 2, remove the T299 can and change C290 (82 pF) to 50 pF. Replace the can. Then change C295 (68 pF) to 25 pF. Now the unit tunes from 5.5 to nearly 8 MHz.

Next, solder a .01-μF capacitor from pin 13 on the CA3065 IC to a ground trace. This sets the de-emphasis to 75 μsec using a resistor inside the chip. Then solder a 5-μF (or so) capacitor from pin 8 on the CA3065 to a spare trace. If you don't see a spare trace, then cut the trace from pin 8 on the CA3065 leading out to the edge of the board and solder the cap across this trace cut. Just be sure the cap is polarized (end with + on it) towards the chip. Now you have a dc-blocked output to your amp. We don't use the preamp inside the chip because a quick look at the distortion specs would drive any audiophile back to AM radio!

Last, solder a 50k PC-type mini-pot from pin 6 on the chip to a ground trace. This is a volume control that we use in the mixing process. You can use larger shaft-type pots and mount them on the front panel, but they are likely to get bumped later on and will only reduce stereo separation. So why bother?

Depending on your TVRO receiver, you may need an input bandpass filter to cut noise from the video and adjacent audio subcarrier. The input coil (T299) works pretty well, but a cheap 10.7-MHz FM i-f transformer padded down to the proper

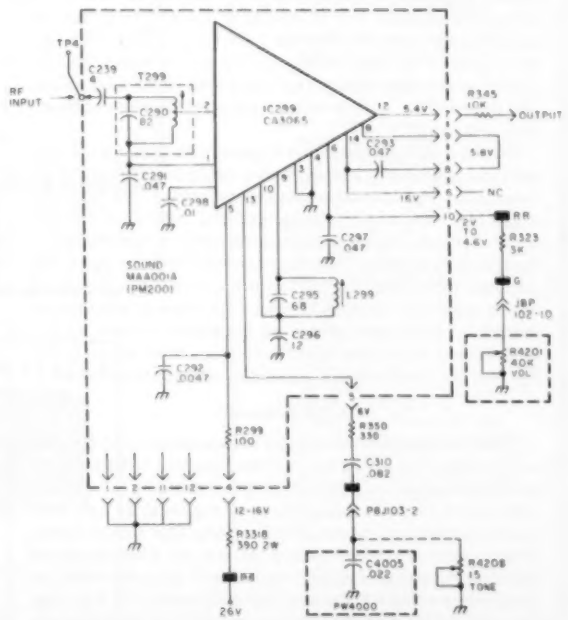

Fig. 2. The RCA PM-200 uses a CA3065 quadrature FM-detector IC for 4.5-MHz audio. The few mods discussed in the text will make it perform very well as a stereo sound decoder.

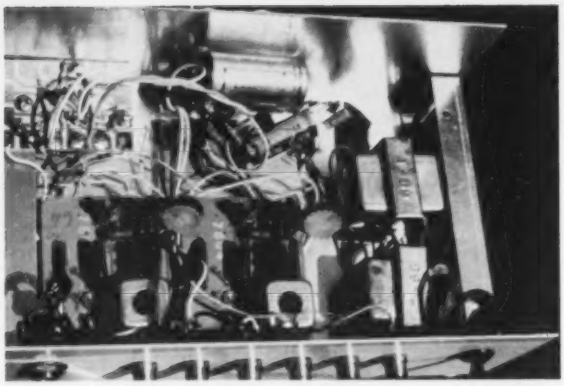

Photo B. Clean out that junk box with this project since nothing is critical. For example, two 12-18-volt transformers can be used instead of a single 24-36 volt. Even another op amp likely will work.

frequency knocks out what little noise is left. Not all transformers are the same, so a gdo or an rf generator will separate the winners from the losers. The secondary usually has a center tap.

Junk Box Jubilee

I decided to take a strictly plain-vanilla approach since I knew my little Music Box would soon be lost in the never-ending wire jumble behind my preamp. I used a utility box and mounted RCA jacks for all the outputs to my stereo system. (See Photo A.) The rf input was a lowly phone jack since I believe in using everything in the junk box. Use mini-coax if you have some. The input transformers can be soldered to the bottom of the PM-200s. The op amp was mounted on an experimenter's breadboard. All boards were mounted on standoffs. The PM-200 already has a hole in it for 6-32 hardware. Be sure to use voltage regulators to smooth the ripple. The op amps won't see ripple when running from a bipolar supply, but the little PM-200s want pure dc.

For the most part, construction is not critical other than the suggestion that you use coax to feed the PM-200s. Also, you should use 5%, ¼-Watt resistors in the op amp matrix (all 100k). While the pots on the detectors can be used to compensate for tolerances, we do want the tune-up process to be easy.

Next, you should modify your receiver. Find the location where the 6.2- and 6.8-MHz detectors connect. This is usually an emitter follower after video detection. Tap in with a dc-blocking capacitor. Then run more mini-coax to a BNC, type F, or RCA jack that you mount on the rear of the receiver. Take your choice. Use what you have. The signal is then patched to the Music Box with still more coax.

Tune-Up Hints

There are two ways to make the Music Box play. You can simply set both 50k pots for minimum resistance (that's maximum volume) and tweak the input transformers, the T299 coils, and L299 coils for sound. But knowing which subcarrier you are on may be a trick. Add to that the possibility that you may have both detectors tuned to the same carrier, and you're sure to see there must be a better way.

Use a signal generator set to 6.62 MHz. Feed it into the unit. Put a scope on pin 9 of the IC on the 6.62-MHz board (L+R) and tune the coils for maximum. Back the generator down below limiting and peak again. Do the same procedure for the other module (L−R), but set the generator to 5.8 MHz.

If the generator can be frequency-modulated by an internal oscillator, set it to ±75-KHz deviation and adjust the L299 coils on each module for the cleanest waveform. Depending on the particular run of PM-200s, you may need a resistor across L299 to lower its Q a small amount. A THD analyzer is a better eyeball if you have one. Without an analyzer, you are stuck with having to use your ear to fine-tune L299 for minimum noise and distortion.

While we're on the subject, don't expect the Music Box to play very well if your system has any sparklies. And narrowing the receiver i-f bandpass doesn't count, despite the picture improvement you'll likely see. It's what you'll hear that really counts. The first time a solid-color field is displayed (wider carrier deviation), you'll see and hear what many call frizzies, the bane of all "near threshold" systems. Even with music, nothing beats a good LNA and a large dish. Nothing.

At this point, you should be able to connect everything and hear pretty good stereo. Use headphones to verify. Some of the music is in mono, so don't worry if your first blast of sound is in the middle of your head. If you used 5% or better resistors on the op amps, you may be finished. Otherwise, the two 50k pots may need adjustment for maximum separation. Tweak either pot for best aural

WHY QUAD?

Back in the dark ages of stereo, David Hafler of Dynaco was experimenting with techniques to eliminate the so-called "hole in the middle" between left and right channel speakers —see Fig. 3(a). From that effort came a center-channel speaker which was simply the left and right channels combined (L + R) and played 6 dB softer. Then he went one better and suggested a single speaker *behind* the listener to add ambience. Logically, this ambience channel would consist of the difference between the channels, or L − R. Remember, we started with only two channels from tape or disk. This was revolutionary to audiophiles, but old hat to motion-picture people who'd been doing it for years with Cinemascope and 3D. (Funny how simple technology doesn't cross-pollinate now and then.)

Anyway, Michael Gerzon in England improved on the idea with the typical left- and right-front setup by feeding the difference (L − R) to separate speakers located at "left-rear" and "right-rear" and out of phase—see Fig. 3(b). It sounded so good that record people started recording ambience with a reverse matrix setup. Then they tried discrete channels, and you had technology go mad with the consumer wondering which system to choose. So much for history. Most stereo recordings have some ambience imbedded in them, so this technique is worth the extra effort to track down an old amplifier and two small speakers to fiddle with quadraphonics.

A 5th Channel?

If the front speakers are widely separated, you can connect a 5th channel to go between them. This will indeed reduce separation but tends to fill the "hole in the middle" effect. Cinema sound processors use this technique with an agc to restore apparent separation. Since a signal that would appear to be located at a point in space between the speakers would have to be coming from both the left and right channels, we must assume that it is the sum of the channels, or L + R—see Fig. 3(c). So feed another amp with the L + R output of the Music Box and place the speaker between left and right speakers.

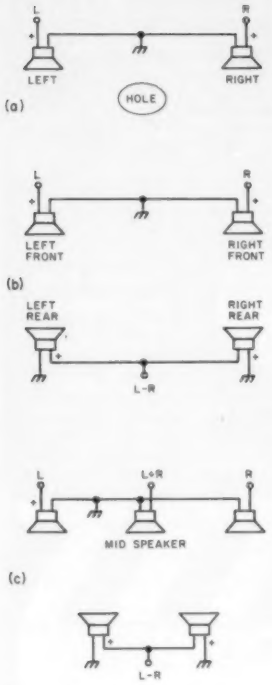

Fig. 3. Evolution of four- and five-channel sound. (a) Stereo, (b) quad, and (c) five-channel system.

separation or connect the Music Box outputs to the horizontal and vertical inputs of an oscilloscope. Without sweep, you can adjust the detector pots for a 45-degree angle trace on the CRT when mono is being transmitted. You'll see a "ball of yarn" display when stereo is being sent. Of course, you can always adjust for the most symmetrical jumble. What else would one do for rock and roll?

Next, connect the speakers. Watch phase because it is everything in a quad set-up. If you are unsure, then first place a 1.5-volt cell momentarily across the voice coil of each speaker and note in which direction the cone moves. Mark the speaker lead with a + when the cell polarity causes the cone to move outward. All this is arbitrary, of course, but serves to give you a reference from which you can work.



Fig. 4. Hookup for quadraphonic sound.

Music Box Bonus!

Sending the sound tracks in stereo was a pretty good idea. But what the Warner people didn't option was quadraphonic sound (at least until they read this)! And the little Music Box can do it. Quad sound? Yeah. . . and does it sound neat! And if four channels don't grab you, then how about five channels? It's just sitting up there on the bird waiting for you to snatch it!

For a quick trip into the history behind four- and five-channel sound, see the box. To get quad, just take the Music Box's L−R output, run it through a power amplifier, and connect two speakers as shown in Fig. 4.

Note that the speakers on the amplifier's output are connected in parallel but out of phase. The L−R goes on the left rear as you face the main speakers. The R−L goes on the right rear. Since the rear speakers will be radiating only ambience, you don't need to use the best that money can buy. Small bookshelf units work fine.

Setting levels for quad is a matter of taste. The ambience effect is very pronounced if the rear levels are high. But the stereo effect is reduced somewhat depending on the room. This is also true of the center channel. Too much level and separation goes away. As a rule, start your adjustments with the center and rear channels about 6 dB softer than the main left and right. And. . .oh yes. . .remember the threshold of pain is still +120 dB. But it may be less with rock and roll! ■

$54.95 KD-44™
Parabolic Reflector Kit
900 MHz - 2.5 GHz
25db
A low cost, high quality alternative to snow sleds and yagis. 44" diameter, 2 piece durable lightweight steel const. Includes feedhorn bracket, pre-cut hardware cloth and all hardware needed for assembly. Excellent for weather satellite and 1296 MHz experimenters!
Our kit also comes in a 2 ft. size with 19 db gain— ONLY $24.50

2300 MHZ CONVERTER KIT.....$99.00
Includes PC board, parts & instruction manual.
SELECTIVE PREAMP.....$39.95
For use with above converter. This preamp can also be used with other manufacturer's boards for improved performance.
VARIABLE POWER SUPPLY.....$24.95
Includes all components, case, overlays, and built in antenna switch.
DELUXE 2300 MHZ CONVERTER KIT.....$89.95
Recommended for experienced kit builders. Dual-stage selective preamp, mixer, i.f. amplifier and no-drift crystal-controlled oscillator.
12V STATIONARY POWER SUPPLY.....$24.95
For use with Deluxe Converter.
MODEL TMVS-1 KIT.....55.00 Assembled 70.00
For use between two VCR's.
MODEL TMVS-1RF KIT.....79.00 Assembled 99.00
(Built in RF Modulator for direct connection from VCR to TV)

TEXAS MICROTRONICS
P.O. BOX 14118
ARLINGTON, TEXAS 76013
817-860-5440
328

TERMS:
Visa, MasterCard
Check, Money order, and C.O.D. (Add $2)

SATELLITE TV SYSTEMS
"COMPARE OUR QUALITY, PRICES AND SERVICE!"

WE MANUFACTURE:
PARABOLIC DISHES
LNA HOLDERS
MOTORIZED SYSTEMS
DEMO TRAILERS
POLAR MOUNTS
ALUMINUM HORNS

WE STOCK:
DRAKE
WASHBURN
AUTOMATION TECH.
KLM
AVANTEK
AMPLICA
ALLIANCE
CHAPARRAL
AVCOM
MODULATORS
CABLE & CONNECTORS
SWITCHES & HARDWARE

CALL, OR WRITE FOR OUR LATEST BROCHURE AND PRICES.
AUSTIN C. LEWIS
901-784-2191
LEWIS CONSTRUCTION CO.
P.O. BOX 100
HUMBOLDT, TN. 38343

"IN BUSINESS AT THIS LOCATION SINCE 1964"
452

Since 1966, HEIL LTD. has built sound systems for groups such as the WHO, STONES, DOLLY PARTON and recording studios. HEIL now directs their expertise to the amateur radio field.
MICROPHONE EQUALIZER
$49.95 add $3.00 shipping
•High quality speech audio
•Increase talk power, 10dB!
•Equalize any microphone
•Be proud of your signal
•Installs easily in mic lead
•Brighten up MC-50 mics
•Put good lows in D-104
HEIL SOUND
HEIL, LTD.
Marissa, IL 62257
618-295-3000
127
MODEL EQ 200
Most signals contain excessive lows, very few highs that cause them to be muddy sounding, hard to copy, lacking articulation and prescence of sibilance ('s & 't' sounds). These annoying conditions are NOT solved by audio processing. The answer is EQUALIZATION. Just as broadcasters and recording studios EQ their mic lines, the EQ 200 allows you to reduce distortion, add clearity, prescence and sibilance.
The card also has a Two Tone Generator circuit. By installing a few components, you can properly tune your SSB transmitter. Two Tone parts Kit $7.00

See List of Advertisers on page 114

MICROWAVE ANTENNAS & KITS

- MICROWAVE DOWNCONVERTERS
- PARABOLIC ANTENNAS
- MICROWAVE PRE-AMPS
- HEAVY DUTY TRIPODS
- MICROWAVE PARTS & COMPONENTS

Your source of supplies for the fastest growing field of communications. Here is a low cost entry into the fascinating area of microwave technology. We offer a complete line of antennas, receivers, pre-amps, power supplies, etc..... Call or write for details.

DATA SERVICE CO.
3110 Evelyn Street
Roseville, MN 55113
612-636-9469
346

SATELLITE TELEVISION FEED HORN



MADE FROM .050 BRASS

Used with a PARABOLIC DISH having a focal length to diameter ratio (f/D) .3 to .45

Frequency range 3.30 GHz to 4.90 GHz

Fits a standard CPR 229 flange on the LNA

Introductory offer: $30.00 Postpaid USA

Mastercard - Money order - Cashier Check

For an additional charge we will adapt this feed horn to your LNA.

FRIEDSAM TV HARDWARE
P.O. BOX 311
112 WEST MAIN STREET
MARSHALLVILLE, GEORGIA 31057
912-967-2828 116

QUALITY MICROWAVE SYSTEMS
2100 TO 2600 MHz ANTENNAS
MINIMUM 34 db GAIN OR GREATER

Complete System as pictured (6 month warranty)	$149.95
Down Converter (Probe Mntd.) assembled & tested	$59.95
Down Converter (Chassis Mtnd.) assembled & tested	$59.95
Power Supply, assembled & tested	$49.95
Down Converter PC board, with parts, unassembled & Data	$39.95
Data Information (Plans)	$9.95



Send cash, check or money order to:
Phillips-Tech Electronics
Dept. SP-73 421
P.O. Box 33205
Phoenix, Arizona 85067
For special quantity pricing, C.O.D.'s, Mastercharge, and VISA call:
(602) 274-2885

RADIO ACTIVITY
531 WEST COLLINS DRIVE
CASPER, WYOMING 82601

FM ATLAS AND STATION DIRECTORY (7th Edition-1982)
by BRUCE F. ELVING.
Accurate information on FM broadcast, booster and translator stations. $6.95
Compiled by location and frequency for United States and Canada with maps.
TDK cassette tape C-180 for third party record, 3 hour capacity $6.00
TDK continuous loop cassette tape for announcements
30 second $4.50 3 minute $3.50 12 minute $4.50 315
PANASONIC CT 5511 battery portable color TV receiver and video monitor $420

HAM HELP

I am in need of service data for a Hammarlund HQ 100A, Hallicrafters WR 1500, and old Weston, Jewell, and Hickock tube testers.

Frank Krantz
100 Osage Ave.
Somerdale NJ 08083

I need plug-in coils for a National SW-3 receiver.

Max R. Otto WØLFF
733 W. Benton St.
Iowa City IA 52240

Does anyone know how to convert a little transistor broadcast AM receiver to 160 meters to receive code for QRP work?

Frank Hennis KA7IWW
1009 Dibb St.
Bremerton WA 98310

I am looking for a Hallicrafters LF/MF tuner, model HA-10.

Ed Heger KA2HNO
271 Henry St.
Paramus NJ 07652

I am looking for work in the electronics field in the Knoxville-Chattanooga TN area. Experience includes digital and rf circuits. I have a First Class Radiotelephone license with radar endorsement and an Extra class amateur license.

H.F. Schnur
8227 Rolling Stone Lane
Ooltewah TN 37363

CORRECTIONS

The British VHF converter project presented in the April, 1982, issue of *73* uses a double-sided printed board. The foil pattern for the board's top (component) side was inadvertently omitted. It is reproduced here as Fig. 1. Also, the crystal X1, R9, and L4 junction should *not* be connected to ground.

Tim Daniel N8RK
***73 Magazine* Staff**

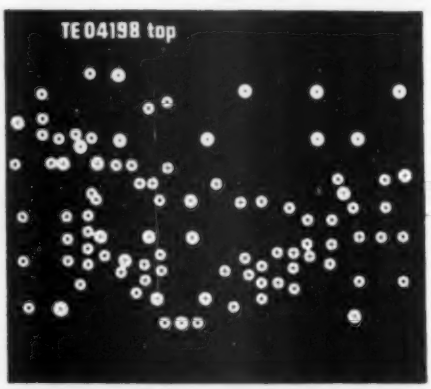

Fig. 1. Foil pattern for top side of the VHF converter PCB.

N&G

WATTS 800-327-3364

DISTRIBUTING

7201 N.W. 12th ST.
MIAMI, FLORIDA 33126
1-305-592-9685 • 1-305-763-8170

WE ALSO CARRY MANY
MARINE & AIRCRAFT RADIOS

THE LEADER IN
COMMUNICATIONS

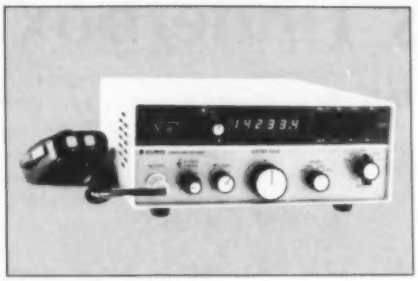

ASTRO 150 $975.00
MATCHING POWER SUPPLY 179.95
MATCHING ANTENNA TUNER 189.95

General Frequency Range
160 Meter Band – 1.8-2.4 MHz†
80 Meter Band – 3.0-4.5 MHz
40 Meter Band – 6.0-8.3 MHz
20 Meter Band – 13.8-16.0 MHz
15 Meter Band – 20.8-23.0 MHz
10 Meter Band – 28.0-30.0 MHz††
†† Model 150 only
† Model 151 only

**HF/SSB
PORTABLE
RADIO STATION
100 WATT
115/230V
50/60 Hz AC
OR 12V DC
IS AVAILABLE**

CUBIC

DIPLOMAT 150

BATTERY PACK CHARGER

BIRD WATT METERS & ACCESSORIES
LARGEST SELECTION IN THE EAST

**G.S.C. REGULATED
Power Supplies**

Model	List	Sale
IV	24.00	18.00
6-R	71.00	55.00
10-R	92.00	67.00
20-R	116.00	87.00
35-R	227.00	161.00

**U.S. DISTRIBUTOR
FOR F9FT
TONNA ANTENNAS
CALL US**

Prices Or Specifications
Are Subject To Change
Without Notice

HAL Communications Corp



MIRAGE AMPLIFIERS

1/4 WAVE MAG
LIST 24.95
N&G PRICE 15.00

FREEDOM PHONE
BEARCAT SCANNERS

THE DRAKE LINE

BIRD 43 152.00
All Bird Prod. in Stock

ALL PRICES ARE SUGGESTED RETAIL PRICES • PLEASE CALL FOR QUOTES.

Roger N. Peterson
25 Orchard Lane
New Canaan CT 06840

Tune In the World's Tinderbox

—SWLing from Cairo to Kuwait

The assassination of Anwar Sadat, President of Egypt, was simply the latest, at that time, of a whole series of "incidents" in this conflict-torn area. The warfare between Israel and Egypt a few years ago, the fighting between Iraq and Iran, the invasion of Afghanistan by the USSR, and the ever-threatened stability of Saudi Arabia, Kuwait, and other Arab oil-producing states are all part of the turbulent Middle East scene. For a clear-cut, direct, day-by-day picture of this explosive part of the world, listen to your shortwave radio. All the countries mentioned above, plus others, have daily programs in English that can usually be heard well in North America. And you will find it interesting to compare the different viewpoints of these nations.

Radio Cairo from Egypt usually has a pretty good signal into North America. Its English programs can be heard at 2215-2345 GMT on 9805 kHz and at 0200-0330 GMT on 12.000 and 9.465 kHz. A 250-kW and a 100-kW transmitter are all the station has. Its programs always open with the sound of chimes (sounding suspiciously like Big Ben in London) and the words from a woman announcer: "This is Cairo, this is Cairo." Following this is a ten-minute news program. Then comes a regular pattern of music followed by a discussion of some timely topic, usually related to the Middle East. The music is Middle Eastern, reminiscent of Egyptian belly-dancing scenes in old movies. The music goes on for about ten minutes and then for 15 minutes you hear talk. Then back to the music, and so on. This is the regular daily program format. However, like the good broadcasters they are, Radio Cairo is not afraid to break out of the mold if the occasion calls for it.

If you had been listening to Radio Cairo on the evening that Sadat was killed, as I was, you would have been in for a most interesting experience. As soon as the official announcement of Sadat's death had been made, Radio Cairo discarded its regular format and put on a fascinating program about the late president. They covered his rise to fame and his accomplishments while president, and then switched to a report on the background of his successor, Hosni Mubarak.

To me, this was shortwave radio at its best. Such experiences give the listener the opportunity to go to the sources of major stories, wherever in the world they take place, and to get on-the-spot coverage that is usually way ahead of your local radio or TV news report.

Perhaps the most extensive broadcasting job in the

Middle East is done by Israel. Kol Israel, the voice of Israel's External Service, beams some six hours of English-language programs into North America, many of them very popular with regular listeners.

Broadcasting in Israel goes back to the days when the British ruled Palestine under a League of Nations mandate. They formed the Palestine Broadcasting Service (PBS) back in 1936 and put out programs in English, Hebrew, and Arabic. The present Kol Israel took its bow on the first day of Israel's independence, carrying Prime Minister David Ben-Gurion's original Declaration of Independence speech *live* on May 14, 1948, from the Tel Aviv Municipal Museum. The Hebrew broadcasting staff of the PBS joined up with those who had been broadcasting for the Jewish underground to form a nucleus for the original Kol Israel organization.

In 1965, a Broadcasting Authority Law was enacted that gave Kol Israel the same status that is enjoyed in Great Britain by the BBC. That is, it is administered by a Board of Governors acting as an independent body outside of direct government control. The executive head is the Director-General who is appointed by the government for a five-year term.

About two-thirds of the Israel Broadcasting Authority's budget is revenue from license fees of domestic listeners and TV viewers. The remainder comes from fees charged advertisers for commercials on domestic radio and TV. The External Service also gets direct grants from the government.

Kol Israel has a strong signal into North America with four 300-kW transmitters aimed at our shores. Broadcasts in English can be heard in the mornings, afternoons, and evenings. The last is the best time for reception, although afternoons generally also are good. Mornings at 1200-1230 GMT are usually not the best for reception.

In the evenings, listen from 0000 to 0030 GMT, 0100 to 0130 GMT, and 0200 to 0225 GMT on one of the following frequencies: 15.583 kHz, 11.640 kHz, or 9.815 kHz. Also listen from 0500 GMT to 0515 GMT on 15.105, 11.960, 11.638, or 9.815 kHz.

In the mornings at 1200, try for Kol Israel programs on 21.760, 21.495, or 17.612 kHz. Sometimes the reception at this hour is unusually good, but it is problematical, unlike the other times of broadcast.

From 2000 to 2030 GMT on 12.025, 11.960, 9.815, and 11.638 kHz, reception is usually strong. So, too, is it from 2230 to 2300 GMT on 11.960, 11.638, and 9.815 kHz.

All Kol Israel programs begin with a five-minute news summary and then go into their regular programming, which is different each day.

Sundays. "Calling All Listeners" is Radio Israel's popular DX program which gives up-to-date information on frequency changes for stations in the Middle East and also Kol Israel program details for the week. This program extends into Monday GMT times (0100, 0200, etc.).

Mondays. "Program Parade" gives forthcoming program details, and then comes "This Land," which is particularly aimed at people interested in touring Israel. Following this is "Spectrum," which reviews Israeli scientific developments.

Tuesday. "Israel Mosaic" gives the listener interesting facts about life in that country. "Pop Sound" offers music, and then comes "Personally Speaking," a program with guest commentators.

Wednesdays. "Israel Forum" is the big program of the day and offers the listener some lively discussions about people and politics.

Thursdays. "Time Out" offers interesting feature stories about life in Israel.

Fridays. "Music from Israel."

Saturdays. "Israel This Week" is a review of current events of the past six days.

Compared to Israel, the other Middle East broadcasters are, for the most part, inferior. While some have good signals, they are not on the air very much and their programming is, by comparison to Kol Israel, somewhat crude. However, if you are not listening just for enjoyment, as you might with the BBC or other Western stations, but to get information and various viewpoints, these other Middle East stations do give you that.

Radio Kuwait is an interesting station to listen to. This little country—about the size of Israel but with only half as many people—has some 15% of the world's oil reserves. Oil pays for just about everything there—free medical care, education, and social security. Best of all, there are no taxes!

Kuwait, as might be expected, has modern Western technology working for it, and this includes shortwave transmitters in which there are four 250-kW and two 500-kw units. They have a pretty good signal into the US from 1800 to 2100 GMT every day. They use only one frequency—11.675 kHz—but the equipment is good enough to make this almost always a good one for receivers here in this country.

A typical program from Kuwait goes like this:
—1800 GMT—Station Identification; music (Arab style);
—1830 GMT—15-minute talk on some current event in the Middle East by young lady;
—1845 GMT—More music;
—1900 GMT—Western-style music;
—1930 GMT—Review of the week;
—2000 GMT—Music (Arabic); and
—2030 GMT—Discussion of economics by a man.

Listening to Radio Kuwait is similar to sticking with Radio Cairo. It's not easy to stay glued to the receiver on stations like these unless something special is happening in the area. This, of course, is very likely these

Want QSL Cards or Station Programs?
Here are the addresses of Middle East broadcasters:

Radio Afghanistan
PO Box 544
Kabul
Afghanistan

Voice of Islamic Republic
Box 41-3641
Tehran, Iran

Israel Broadcasting Authority
PO Box 1082
Jerusalem, Israel

Broadcasting Service of the
Kingdom of Saudi Arabia
Ministry of Information
Riyadh
Kingdom of Saudi Arabia

Radio Cairo
PO Box 1186
Cairo, Egypt

Radio Baghdad
Iraqi Broadcasting
Salibiya
Baghdad, Iraq

Kuwait Broadcasting
PO Box 397
Kuwait

UAE Radio
Dubai
PO Box 637
Abu Dhabi
United Arab Emirates

Be A Better Listener.

Take command of your scanner or short wave receiver. Learn where to look and when to listen with help from MONITORING TIMES.

Tune In: ● Drug Smuggling Communications ● Police Action ● Space Shuttle support ● Clandestine Broadcasts ● Spy Networks ● Military Air-To-Ground ● Ship-To-Shore Links ...And Much, Much More!

Published bi-monthly, it's the only broad-spectrum publication written for the serious listener.

For a FREE sample issue, please write:

MONITORING TIMES

140 Dog Branch Road, Brasstown, N.C. 28902

days, with the Middle East set to have an explosion of some kind at any time. Thus, it makes sense to know where to find stations like Radio Kuwait on your dial and to check into them from time to time.

A real disappointment is Saudi Arabia. Here is one of the largest Middle East countries, with a population of 9,290,000 and geographically a quarter the size of the US. Like Kuwait, it is oil-rich. Unlike Kuwait, which has a literacy rate of over 60%, Saudi Arabia has a rate of only 15%.

The Saudis have three shortwave transmitters—a 50-, a 100-, and a 350-kW. They should spend a couple of bucks and buy more or better ones. Reception is not very good here in the US. They broadcast from 1800-2100 GMT on 11.856 or 7.210 kHz.

When you do tune them in, the program starts with a man saying, "This is Radio Jeddah, the broadcasting service of the Kingdom of Saudi Arabia." The program that follows is a mixture of Middle Eastern music and talk, the latter primarily explaining positions on oil prices, purchases of modern arms from the US, etc. Again, while not the most entertaining station to listen to, it could be of great interest should some event take place in that part of the world.

A much more intriguing station to listen to is UAE Radio in Dubai, in the United Arab Emirates. Here is a little country that I had never heard of before becoming a shortwave radio listener. It has a population of less than a million people and is roughly the size of Maine. However, oil revenues give the UAE one of the highest per capita gross national products in the world. This little country was a British protectorate until 1971—another reason for its obscurity.

From a broadcasting standpoint, UAE Radio is a pleasant surprise. It has three 300-kW transmitters which seem to reach us here in North America extremely well. Its English programs can be heard twice daily, at 0330-0357 GMT on 17.775 and 9.590 kHz, and from 1610-1650 GMT on 21.695 and 17.710 kHz.

After station identification by a young lady who sounds as though she has been educated in London, England, UAE Radio offers not the news, as is the usual shortwave broadcasting technique, but a feature story. Recently, for example, it had an interesting 15-minute talk on the history of the trade of that geographical area with China during the time of the Crusades. Following this came ten minutes of music—not Arabic music, but the kind we hear on US FM "beautiful music" stations. After this came the news.

News is done in BBC style. That is, first they give you the headlines, then the detailed stories, and then a repeat of the headlines. You can see the British influence in their broadcasting. With the exception of Israel, UAE Radio appears to be the most westernized of all the Middle East stations.

Another pleasant surprise in Middle East stations is Radio Baghdad from Iraq. This station also has very good programs, and even though it is reported to have only a single 250-kW transmitter, it comes in with a pretty strong signal to North America. A typical program starts with 15 minutes of news followed by about five minutes of music (Arab style). Next comes a five-minute editorial (perhaps on the war with Iran and why they are fighting), followed by more music. Then another talk and more music.

While it may sound rather boring, the fact of the matter is that the talks are well thought out and very well delivered. It is good listening if you are at all interested in what is going on in the Middle East.

Iraq is not a large country (a little bigger than California in size and with a population of 12,000,000), but it is one of the key nations in the area and, unlike some, has a pretty good record for stability. In other words, its attitudes and thinking will be important in future developments in the Middle East. You can hear Radio Baghdad every day at 2130-2225 GMT on 9.745 kHz and at 0300-0335 on 21.585 kHz.

The other countries in the area are an "iffy" proposition as far as reception is concerned. Iran, three times the size of Iraq in both population and area, can often be heard at 1930-2030 GMT on 9.022 kHz. Programs are not exactly award winners, but you do get the Iranian point of view.

Afghanistan can usually be heard at 1900-1930 GMT on 15.077—but not very well. Algeria can sometimes be heard at 2100-2130 GMT on 25.700 or 15.215 kHz. Some listeners have heard Lebanon on 11.790 or 11.860 kHz at 0230-0300 GMT. DX-ers have caught additional Middle East countries, but not with programs in English.

However, for those of you who want to keep up with what is going on in that part of the world, you have a pretty wide choice of stations with good signals and fairly good programs—Israel, Egypt, UAE Radio, Kuwait, and Iraq. This assortment gives you a good balance of opinions. After a few months of listening to this array of programs, you'll be the best-informed guy or girl on the block about the Middle East. ■

Introducing incredible tuning accuracy at an incredibly affordable price: The Command Series RF-3100 31-band AM/FM/SW receiver.* No other shortwave receiver brings in PLL quartz synthesized tuning and all-band digital readout for as low a price. The tuner tracks and "locks" onto your signal, and the 5-digit display shows exactly what frequency you're on.

There are other ways the RF-3100 commands the airways: It can travel the full length of the shortwave band (that's 1.6 to 30 MHz). It eliminates interference when stations overlap by narrowing the broadcast band. It improves reception in strong signal areas with RF Gain Control. And the RF-3100 catches Morse communications accurately with BFO Pitch Control.

RF-6300 8-band AM/FM/SW

Want to bring in your favorite programs without lifting a finger? Then consider the Panasonic RF-6300 8-band AM/FM/SW receiver (1.6 to 30 MHz) has microcomputerized preset pushbutton tuning, for programming 12 different broadcasts, or the same broadcast 12 days in a row. Automatically. It even has a quartz alarm clock that turns the radio on and off to play your favorite broadcasts.

The Command Series RF-3100 and RF-6300. Two more ways to roam the globe at the speed of sound. Only from Panasonic.

*Shortwave reception will vary with antenna, weather conditions, operator's geographic location and other factors. An outside antenna may be required for maximum shortwave reception.

†Based on a comparison of suggested retail prices.

This Panasonic Command Series™ shortwave receiver brings the state of the art closer to the state of your pocketbook.

With PLL Quartz Synthesized Tuning and Digital Frequency Readout.

Panasonic.
just slightly ahead of our time.

TUFTS ELECTRONICS

61 Lowell Rd., Hudson, N.H. 03051

9-6 Daily (603) 883-5005 12-5 Sunday

....TOWERS....ROTORS....ANTENNAS....COAX....HF XCVRS....
Over 1000 different amateur radio items are listed on these two pages, and most of them are in stock ! Open SEVEN DAYS every week and NO SALES TAX in New Hampshire. You'll find that our DISCOUNT PRICES are hard to beat and our FRIENDLY SERVICE is second to none. We're only 30 mins from Rte 128 in BOSTON via Rte 3, and only 45 Mins from LOGAN International Airport in . If you cannot visit us then try our FAST mail order service. Most mail and PHONE orders are shipped in one day. Send $1 for our ENLARGED CATALOG, free with orders.

DISCOUNTS - FREE CATALOG - EXPORTS - PACKAGES

ALLIANCE MFG

	REGULAR	SALE
HR-10 Ham, UHF/VHF rotator HD7200	130.00	109.95
HR-200 TV rotor HD-50, 10'/50' for 50CAU	92.95	82.95

ALPHA AMPS

	REGULAR	SALE
76A THE BETA TUBES L.Strip HEAVY DUTY STYR	1595.00	1499.00
76PA THREE BETA TUBES L.Strip HEAVY DUTY STYR	2995.00	2799.00
76CA THREE BETA TUBES ETHA HI STYR	3495.00	3299.00
374A 2+ KW TWO CHASSIS NO HARDS TUBING	3995.00	3799.00
78 THREE BETA TUBES AND NO HARDS TUBING	3495.00	3995.00
77SX ONE BETA TUBE 2KW PEP INPUT NO TUNE LIMIT	4650.00	4495.00

AMPHENOL CONNECTORS

	REGULAR	SALE
PL-259/3 5 PCS PL-259 FOR 9MM/RG11/213 STD		4.50
UG-175/U 10 PCS ADAPTER FOR PL-259 FOR RG-58U		3.50
UG-176/U 10 PCS ADAPTER FOR PL-259 FOR RG8A/U		3.50
83-1R PL-259/3 DOUBLE FEMALE SO-239		4.50
83-1T PL-259/3 PL-259 DOUBLE MALE		3.50
83-1F UG8A/U SO239 TO SO239 BULKHEAD MOUNT		3.50
83-1SP UG-175/U SO239 TO PL-259 ADAPTER		3.50
83-1SPL UG-176/U SO239 TO PL-259 ADAPTER		3.50
83-1CB 2 PCS SO-239 PANEL MOUNTING FLANGE		3.50
83-1CBS 2 PCS SO-239 PANEL MOUNTING FLANGE		3.50
83-1SPS 5 PCS SO-239 DOUBLE HOLE MOUNT RECPT		9.95
83-1SPB 5 PCS UG88C/U BNC PLUG FOR RG-58/U		9.95
83-1SPB 5 PCS UG88A/U BNC PLUG FOR RG-59/U		9.95
83-1BNC UG94A/U BNC FEMALE PANEL RECEPTACLE		3.50
83-1TNC 5 PCS UG960/U BNC DOUBLE HOLE MOUNT		9.95
83-1C UG921/U N MALE FOR RG8U		4.50
83-1CT UG146/U N FEMALE FOR RG-8U		4.50
83-2A UG83/U N FEMALE PANEL RECEPTACLE		3.50
83-2AT UG84/U N DOUBLE MALE		3.50
83-2BC UG87B/U N DOUBLE MALE		7.50
83-2AT UG83/U N ELBOW MALE TO FEMALE		7.50
83-2CT UG188/U 50 OHM TEE MALE TO TWO FEMALE		13.00
83-2ST UG491/U BNC DOUBLE MALE		3.50
83-2SP UG491/U BNC DOUBLE FEMALE		3.50
83-1SBNC UG 959/U BNC ELBOW MALE TO FEMALE		3.50
83-1SBNCT UG 274/U BNC TEE ONE MALE TO TWO FEMALE		3.50
83-1SBNCP UG 273/U BNC PLUG TO N JACK ADAPTER		3.50
83-1SBNCJ UG 272/U BNC PLUG TO N JACK ADAPTER		3.50
83-1SBNCA UG 914/U BNC FEMALE TO N MALE ADAPTER		3.50
83-1SBNCF UG 274/U BNC FEMALE TO PL-259 ADAPTER		3.50
83-1SBNCM UG 83A/U N MALE TO SO-239 ADAPTER		3.50
83-1SBNCN UG83C/U N FEMALE TO PL-259		6.50
83-1SBNCR UG-273/U TO RG7A/U OR RG8 PLUG		3.50

ANTECK ANTENNAS

	REGULAR	SALE
HT-1 ALL BAND MOBILE ANTENNA 80-10 METERS	139.95	122.50

ASTRON CORP

	REGULAR	SALE
RS-4A 4AMP LEVEL REGULATED SUPPLY	49.95	42.50
RS-7A 7 AMP LEVEL REGULATED POWER SUPPLY	64.95	59.95
RS-12A 12 AMP LEVEL REGULATED POWER SUPPLY	84.95	79.95
RS-20A 20 AMP 12 VDC REGULATED POWER SUPPLY	115.95	99.95
RS-20M 20 AMP LEVEL REGULATED POWER SUPPLY METERED	134.95	119.95
RS-35A 35 AMP LEVEL REGULATED POWER SUPPLY	174.95	149.95
RS-35M 35 AMP LEVEL REGULATED POWER SUPPLY METERED	194.95	169.95
RS-50A 50 AMP REGULATED 13VDC SUPPLY	260.95	229.95
RS-50M 50 AMP SUPPLY WITH DUAL METERS	299.95	259.95
RS-70M 70 AMP SUPPLY WITH DUAL METERS	399.95	349.95
12-115 REGULATED SOLID STATE 115VAC 200W	89.95	79.95

B&W LOADS AND WATTMETERS

	REGULAR	SALE
374 BURP LOAD WATTMETER TO 300MHz (2000WATTS	239.00	212.50
370A BURP LOAD WATTMETER TO 30MHz (2000WATTS	169.00	149.50
322 BURP LOAD WATTMETER TO 300MHz 200WATTS	129.00	109.50
329A BURP LOAD TO 300 MHz (200 WATTS)	69.95	59.95
370-1A SW INTERRUPTOR 100 STEPS TO 6150 200MHz	67.50	57.50
380-6 ELECTRONIC TVI FILTER	99.00	84.50

B&W COAX SWITCHES

	REGULAR	SALE
375 SIX POSITION AUTO/BRAKE UNUSED POS	32.00	27.95
376 5 POSITION SIXTH POS GROUNDS ALL POS	32.00	27.95
377 110 VAC ANT CHANGEOVER RELAY	25.00	22.50
378 3 POSITION NON GROUNDING	25.75	22.50
379 5 POS AUTO-GROUNDS UNUSED POS	25.75	22.50
390 3 POS WITH AUTO-GROUND UNUSED POS	19.95	19.95
391 2 POLE 2 POSITION	25.00	22.50
392 4 POS WITH AUTO-GROUND ALL UNUSED POS	34.50	29.50

BEARCAT

	REGULAR	SALE
BC-100 10 CHANNEL INCLUDES AIRCRAFT	299.95	249.50
BC-200 7 BAND 50 CHANNEL INCLUDES AIRCRAFT	399.95	349.50
BC-210XL 7 BAND 16 CHANNEL W/SEARCH & HOLD	349.95	299.50
BC-[illegible] HANDHELD 9 BAND 16 CHANNEL[illegible]	299.95	249.50

BENCHER

	REGULAR	SALE
BY-1 LUXELI PADDLE HEAVY DUTY BASE	43.95	39.50
BY-2 DELUXE LUXELI KEY CHROME BASE	52.95	47.50
BY-3A BALUN 2.5-30 MHz		17.50
BY-3B BALUN (4-1) 80 MHz with 2" DESK		21.50
BY-4 AUDIO CW FILTER	69.95	64.50
BY-5 ACCESSORY POWER SUPPLY 12VDC		9.95

BIRD ELECTRONICS

	REGULAR	SALE
805 WATT METER SPECIFY 50-239 OR TYPE N	150.00	134.95
4421 WATTMETER W/HANDBOOK 6P TOP	299.00	269.00
5-50 MHZ ELEMENT SPECIFY POWER AND FREQ	47.00	42.50
50-1000MHZ ELEMENTS SPECIFY POWER AND FREQUENCY	47.00	44.50
43-H DUMMY LOAD FOR 43 SERIES	99.00	89.95
43BM 3-30 MHz 250 WATTMETER	99.00	89.95
43BM VHF WATTMETER WATTMETER		



the indispensable
BIRD 43
THRULINE
WATTMETER

Power Range	Frequency Bands (MHz) 3-30	25-60	100-250	200-500	400-1000
½ watts	-	5A	1K	10	1J
10 watts	-	10A	10K	100	10J
25 watts	-	25A	25K	250	25J
50 watts	50H	50A	50K	500	50J
100 watts	100H	100A	100K	1000	100J
250 watts	250H	250A	250K	2500	250J
500 watts	500H	500A	500K	5000	500J
1000 watts	1000H	1000A	1000K	10000	1000J
2500 watts	2500H				
5000 watts	5000H				

cushcraft CORPORATION

CUSHCRAFT HF ANTENNAS

	REGULAR	SALE
A3 3 ELEMENT TRI-BAND BEAM 10 15 & 20	329.95	279.95
A4 4 ELEMENT TRI-BAND BEAM 10 15 & 20	429.95	369.95
A3SK STAINLESS STEEL HARDWARE FOR A3	41.95	32.95
A4SK STAINLESS STEEL HARDWARE FOR A4	49.95	39.95
A743 7 EL 10 MHZ 40D SW KIT FOR 40	94.95	89.95
A744 7 EL 10 MHZ 40D SW KIT FOR A4	94.95	89.95
4W5 14 EL 20M 70DP VERTICAL ANTENNA	134.95	99.95
4W6 14 EL 20M 70DP VERTICAL ANTENNA	134.95	99.95
A50 16 EL 20 METER 50 OHM BEAM	299.95	199.95
A3S 16 EL 20 METER 3 ELEMENT BEAM	289.95	195.95
10-3CD 10 METERS 3 ELEMENT BEAM	159.95	129.95
15-3CD 15 METERS 3 ELEMENT BEAM	239.95	179.95
20-3CD 20 METERS 3 ELEMENT BEAM	334.95	249.95
15-3CS 15 METERS 3 ELEMENT BEAM	139.95	97.50
20-3CS 20 METERS 3 ELEMENT BEAM	194.95	139.95
10-3CS 10 METERS 3 ELEMENT BEAM	99.95	74.95

CUSHCRAFT 2 METER ANTENNAS

	REGULAR	SALE
2D-10 140-164 MHz 10 ELEMENT	109.95	89.95
214B 144-148 MHz 14 ELEMENT	69.95	59.95
214FB 144.0-148 MHz 14 ELEMENT BEAM	89.95	67.00
A147-11 11 ELEMENT 144-148 MHz HARNESS	69.95	59.95
A147-4 4 ELEMENT 2M5 MOUNT BEAM	32.95	29.50
A147-11 11 ELEMENT BEAM	49.95	39.95
A147-20T 20 ELEMENT 10 WEST 10 MHZ FOR 146/147	79.95	59.95
A147-22 22 ELEMENT WITH HARDWARE AND MANUAL	99.95	79.95
450-22 RINGO RANGER 136-164 MHZ	99.95	89.95
2M5-4 4 ELEMENT 2M5 MOUNT TWIST ANTENNA	39.95	29.95
214A-20T 140 MHZ 20 ELEMENT TWIST ANTENNA	99.95	87.95
A147-20T 20 ELEMENT 10 WEST 10 MHZ	79.95	59.95
A147-7 146MHZ 7 ELEMENT 2M5 MOUNT BEAM	39.95	29.95
A147-11 11 ELEMENT 2M5 MOUNT BEAM	49.95	39.95
A147-20T 20 ELEMENT 10 WEST 10 MHZ	79.95	59.95
214-2 2 ELEMENT 144-148 MHZ		19.95
214-4 4 ELEMENT 144-148 MHZ		29.95
214-6 6 ELEMENT 144-148 MHZ		39.95
214-10 10 ELEMENT 144-148 MHZ	109.95	89.95
214-11 11 ELEMENT 144-148 MHZ		49.95
214-16 16 ELEMENT 144-148 MHZ		69.95
214-20 20 ELEMENT 144-148 MHZ		89.95
214-22 22 ELEMENT 144-148 MHZ		99.95
A432-20T 432 MHZ 20 ELEMENT TWIST BEAM		69.95
A432-16 16 ELEMENT 432 MHZ BEAM		49.95
A432-8 8 ELEMENT 432 MHZ BEAM		34.95
A432-4 4 ELEMENT 432 MHZ BEAM	109.95	89.95
A220-11 220 MHZ 11 ELEMENT BEAM	44.95	37.95
A220-7 220 MHZ 7 ELEMENT BEAM	34.95	29.95
A220-4 220 MHZ 4 ELEMENT COLINEAR	59.95	49.95
A220-2 220 MHZ 2 ELEMENT COLINEAR	39.95	34.95
A8-10 29.6 MHZ RINGO VERTICAL	49.95	41.95
A50-10 10 ELEMENT 6M WITH BOOM	109.95	89.95
A6M7-6M BTM KIT FOR 2 6M5-3 OR 6M5-5		24.95
A6M5-6M BTM KIT FOR 2 6M5-6		24.95
A50-6M BTM KIT FOR 2 A50-3 OR A50-5		24.95
A50-6M BTM KIT FOR 2 A50-3 OR A50-5	29.95	24.95
A41-6M BTM KIT FOR 2 A502-11		24.95
A50-6M BTM KIT FOR 2 A502-11	139.95	119.95
A220-6M BTM KIT VERTICAL FOR 2 A220-11		24.95
A220-6M BTM KIT VERTICAL FOR 2 A220-7 OR -11		24.95
A220-2M BTM KIT FOR 2 A220-4		24.95
A50-2M BTM KIT FOR 2 A50-11		24.95
A50-2M BTM KIT FOR 2 A50-16		24.95
A50-2M BTM KIT FOR 2 A50-20		24.95
A50-2M BTM KIT FOR 2 A50-22		24.95
A50-144 BTM KIT FOR 2 A50-11		24.95
A50-144 BTM KIT FOR 2 A50-16		24.95
A50-144 BTM KIT FOR 2 A50-20		24.95
A50-144 BTM KIT FOR 2 A50-22

DISCOUNT CATALOG

TUFTS ELECTRONICS

61 Lowell Rd.
Hudson, N.H.

YAESU

VIC-20 MICROCOMPUTER

	REGULAR	SALE
VIC-20 HOME COMPUTER 4K GRAPHICS/COLOR BASIC	299.00	289.90
VIC-1530 DATASETTE TPE RECORDER FOR VIC-20		79.00
VIC-1515 VIC GRAPHIC PRINTER 80 COL 30 CPS	399.00	379.00
VIC1210 3K MEMORY EXPANDER CARTRIDGE		39.90
VIC1110 8K MEMORY EXPANDER CARTRIDGE		59.90
VIC1011A RS232C TERMINAL INTERFACE		49.90
VIC1112 IEEE-488 INTERFACE CARTRIDGE		99.00
VIC1211A VIC 20 SUPER EXPANDER w/3 RES GRAPHICS		69.90
VIC1311 VICMODEM RS232 CARTRIDGE		69.90
VIC1312 VICCRON 16K/32K EPROM PROGRAMMER		99.00
VIC1901 VIC AVENGERS CARTRIDGE		29.90
VIC1902 SUPERSLOT CARTRIDGE		29.90
VIC1904 SUPER ALIEN CARTRIDGE		29.90
VIC1907 SUPER LANDER CARTRIDGE		29.90
VIC1908 DRAW POKER CARTRIDGE		29.90
VIC1909 MIDNIGHT DRIVE CARTRIDGE		29.90
VIC1906 RECREATION PROGRAM PACK & GAMES 3 TAPES		99.00
VIC1976 HOME CALCULATION PROGRAM PACK & PROGRAMS		99.00
VIC1981 PROGRAMMABLE CHARACTER SET/GAMES/GRAPHICS		14.00
VIC232 VICTERM 3 TERMINAL EMULATOR		9.95
VLI01 INTRODUCTION TO COMPUTING		24.95
VLI02 INTRODUCTION TO BASIC COMPUTING (BOOK)		14.95
VLI-101 PERSONAL COMPUTING ON THE VIC 20 (BOOK)		9.95
VPI10 VIC 20 PROGRAMMERS REFERENCE GUIDE (BOOK)		14.95
VIC1900 DOUBLE DISK DRIVE	999.99	899.90

MOR-GAIN

	REGULAR	SALE
40-20 HD/A 40/20 MTR DIPOLE 26 FT w/SO239	99.00	91.00
80-40 HD/A 80/40 = 15 MTR DIPOLE 69 FT w/SO-239	109.90	99.90
80-40 HD/A MT 40 ABOVE TUNED FOR HD/20	109.90	99.90
75-40 HD/A 75/40 MTR DIPOLE 66 FT w/SO-239	106.75	94.50
75-40 HD/A DP 40 ABOVE TUNED FOR HD/20	106.75	95.90
75-20 HD/A 75/40/20 MTR DIPOLE 66FT w/SO-239	121.00	109.00
75-20 HD/A DP 40 ABOVE TUNED FOR HD/20	121.00	109.00
75-10 HD/A 75/40/20/15/10 MTR DIPOLE 66FT SO-239	141.00	127.00
75-10 HD/A DP 40 ABOVE TUNED FOR HD/20	141.00	127.00
80-10 HD/A 80/40/20/15/10 MTR DIPOLE 69 FT SO239	147.00	132.00
80-10 HD/A MT 40 ABOVE TUNED FOR HD/20	147.00	132.00

J. W. Miller BELL INDUSTRIES

JW MILLER	REGULAR	SALE
AT-2000 2.5 KW AUTO ANT TUN 3-30MHz PWR/SWR MTR	972.50	692.00
2SB-1001 500W AUTO ANT TNR 80/20/15/10 MTR DUAL BAR MTR	599.00	549.00
CA-5000 160/2 TWO MTRS DUAL NEEDLE SWR/PWR MTR	150.75	134.00
CN-7009 LARGE METER FACE VERSION OF CN-720	218.75	175.00
CN-520 140-450 MHz DUAL NEEDLE SWR/PWR METER	183.75	147.00
CN-201 2 PWR CONTRL SW 2 SWR SNSG PKG	58.25	53.00
CD-401 4 POSITION COAX SWITCH 4K RATED	99.25	89.00

LARSEN ANTENNAS

	REGULAR	SALE
LH-MM-150 2 MTR 5/8 WAVE/STUB MOUNT		46.00
LH-MM-220 1 1/4 MTR 5/8 WAVE/STUB MOUNT		46.00
LH-1250 1 1/4 INCH HOLE MOUNT 2 MTR 5/8 WAVE		33.80
LH-MM-2 2 MTR 5/8 WAVE/STUB MOUNT 144-450/220		15.00
LH-MM-220 220 MHZ/STUB MOUNT 5/8 WAVE		46.00
TLH-220 TRUNK LIP MOUNT 5/8 220 MHz		46.00
LH-1250 1 1/4 INCH HOLE MOUNT 5/8 WAVE FOR 220		33.80
LH-SH 3/4 IN HOLE MOUNT 1/4 WAVE FOR 144/220/450		33.80
LH-MM-450 450 MHz MAGNETIC MT BASH ANT		46.00
TLH-450 TRUNK LIP MOUNT BASH ANT FOR 450		46.00
LH-450 3/4 IN HOLE MOUNT BASH ANT FOR 450		33.80
LH-MM MAGNETIC BASE FOR LH MOUNT ANTENNAS		16.50
LH-MMSP MAGNETIC MOUNT WHIP FITS LH MT		3.50
LH-4 3/4 IN HOLE MOUNT KIT FOR LH ANTENNAS		3.50
WHIP REPLACEMENT WHIP FOR LH OR LH-220		3.50
LH-SC GUTTER CLAMP MOUNT FOR LH ANTENNA		16.50
LH-50 COIL 50 MHz COIL ONLY (WHIP NOT INCLUDED)		16.50
LH-450 COIL 450 WHIP ASSEMBLY		39.50

LARSEN QUICK MOUNT

	REGULAR	SALE
QM-100 HI-QUALITY TWO-WAY RADIO BLIDE MOUNT	36.00	34.50
QM-100R RADIO PORTION OF MOUNT ONLY		19.50
QM-100V VEHICLE PORTION OF MOUNT ONLY		17.50
QM-100K KEY LOCK SYSTEM FOR QM-100		4.50
QM-102 PROVIDED TWO ADDITIONAL CONTACTS		4.50

BOOKS

	REGULAR	SALE
UNITED STATES CALLBOOK 1982 OVER 460000 LISTINGS		18.95
FOREIGN CALLBOOK 1982 OVER 360000 DX LISTINGS		17.95
RADIO AMATEURS HANDBOOK 1982 EDITION		9.00
WORLD RADIO/TV HANDBOOK 1982 HOBBIES DIRECTORY		9.00
RADIO HANDBOOK 1982 BY BILL ORR		20.00
ALL ABOUT CUBICAL QUADS BY BILL ORR		9.00
BEAM ANTENNA HANDBOOK BY BILL ORR		9.00
BETTER SHORTWAVE RECEPTION BY BILL ORR		9.00
VHF HANDBOOK FOR RADIO AMATEURS BY BILL ORR		9.00
CARE AND FEEDING OF POWER BRID TUBES BY BILL ORR		9.00
THE RADIO AMATEUR ANTENNA HANDBOOK BY BILL ORR		9.00
SIMPLE LOW COST WIRE ANTENNAS FOR RADIO AMATEURS		9.00
INTERFERENCE HANDBOOK BY BILL ORR		9.00
ARRL ANTENNA BOOK		9.00
ARRL SOLID STATE DIGEST		9.00
ARRL UNDERSTANDING AMATEUR RADIO		5.00
ARRL FM AND REPEATERS		5.00
ARRL OPERATING MANUAL		9.00
ARRL RADIO BOOK OF HAM RADIO		9.00
ARRL ELECTRONICS DATA BOOK		5.00
ARRL NOVICE HANDBOOK		5.00
ARRL HINTS AND KINKS FOR THE RADIO AMATEUR		5.00
ARRL ANTENNA BOOK FOR RADIO EXPERIMENTERS		5.00
ARRL ANTENNA ANTHOLOGY		5.00
ARRL LOCATOR MAP OF EUROPE		5.00
ARRL RADIO FREQUENCY INTERFERENCE		3.00
ARRL US CALL AREA MAP		3.00
ARRL RADIO MOUNTING PROJECTS		3.00
ARRL ADVANCED/EXTRA Q&A BOOK		5.00
ARRL GENERAL CLASS Q&A BOOK		5.00
ARRL TUNE IN THE WORLD WITH HAM RADIO		7.00
ARRL TECHNICIAN/GENERAL Q&A BOOK		5.00
ARRL NOVICE Q&A BOOK		5.00
ARRL CODE KIT (COMPLETE)		24.00
ARRL WORLD MAP		6.00
FINAL EXAM EXTRA CLASS BY DICK SMITH		6.00
FINAL EXAM ADVANCED CLASS BY DICK SMITH		6.00
FINAL EXAM GENERAL CLASS BY DICK SMITH		6.00
FINAL EXAM NOVICE CLASS		6.00
AMECO COMMERCIAL RADIO OPERATOR THEORY COURSE		6.00
AMECO AMATEUR RADIO THEORY COURSE		6.00
AMECO REFERENCE DATA FOR AMATEUR OPERATORS		6.00
WAYNE GREEN 5 WORDS PER MINUTE CODE TAPE		4.50
WAYNE GREEN 8 WORDS PER MINUTE CODE TAPE		4.50
WAYNE GREEN 13 WORDS PER MINUTE CODE TAPE		4.50
WAYNE GREEN 20 WORDS PER MINUTE CODE TAPE		4.50
WAYNE GREEN 25 WORDS PER MINUTE CODE TAPE		4.50
WAYNE GREEN WORLD REPEATER ATLAS		4.50
WAYNE GREEN NOVICE HANDBOOK		4.50
WAYNE GREEN RADIO THEORY TESTER		4.50
WAYNE GREEN NOVICE THEORY TESTER		4.50
WAYNE GREEN 10 TEST FREQUENCY		4.50
WAYNE GREEN CHALLENGE OF 160		4.50
WAYNE GREEN CHALLENGE OF 10		4.50
WAYNE GREEN POWER SUPPLY HANDBOOK		4.50
WAYNE GREEN ANTENNA MATCHING HANDBOOK		4.50
WAYNE GREEN OWNER REPAIR OF RADIO EQUIPMENT		7.50
WAYNE GREEN MINIATURE RADIO HANDBOOK		4.50
WORLD PRESS SERVICE FREQUENCIES		4.50

3-TBA Tri-Band Beam
10 - 15 - 20 METER
Fixed Station Antenna

Engineering performance and Hustler's tradition of outstanding quality is yours in the model 3-TBA tri-band beam for 10 15 20 meters.

Improved design featuring reduced element length and unique dual resonance high Q traps reduce wind loading and overall weight while allowing an exceptionally wide bandwidth.

Specially designed gala match for precision tuning on all three bands and static drain off. Oversized boom to element mounting and heavy duty construction throughout assures maximum operation regardless of weather.



- Lowest SWR at resonance
- Impedance 50 ohms
- Bandwidth at 1k is double 650 KHz on 10 400 KHz on 15 and 200 KHz on 20
- 8db gain
- 25db front to back ratio
- Maximum power legal limit
- Longest element - 23 1 2 feet
- Boom Length - 14 feet 8 inches
- Turning radius - 13 feet
- Weight - 40 lbs.

✓88

TUFTS ELECTRONICS SAVE — LIMITED SUPPLY FREIGHT EXTRA

WM. M. NYE COMPANY

MACOM DUPLEXERS	REGULAR	SALE
MP-42F 2 METERS 35W WATTS 4.5"SPECIFIED BOSS IDEL	539.00	499.00
MP-452 AS ABOVE FOR 220MHz BOTH INCLUDE CABLES	529.00	499.00

NYE VIKING	REGULAR	SALE
MASTER KEY CH KEY W/ HEAVY BASE HEAV KNOB AND CABLE		34.50
310-003 CHROME PLATED CH KEY W/ SWITCH		19.50
322-003 BRASS PLATED CH KEY W/ SWITCH		13.50
330-003 NICKEL PLATED HEAVY DUTY CH KEY W/SW		14.50
331-003 CHROME PLATED HEAVY DUTY KEY W/SW		22.50
404-002 CODE MASTER II KEYER W/O SPEEDER		20.00
404-003 CODE MASTER II KEY W/KEY		20.00
884-1 DUAL PADDLE BREEZE KEY WITH BASE		39.50
888-10P CHROME-PLATED BRASS		39.50
888-11P 24K GOLD PLATED BRASS		49.50
888-16 ERGIC KEYER W/BREEZE PADDLE 110VAC/9VDC	195.00	94.50
888-17 AUTOMATIC BUG W/THETER	79.95	69.50
888-18P LOW PRICE FILTER 2-20 KHZ 2PK	39.50	33.00

NYE VIKING TUNERS	REGULAR	SALE
PG 11 =00 2KW BALUN/ANT/WATT METER MOTOR ISOLATED	335.00	299.00
PG 11 =00 AS ABOVE WITHOUT BALUN	299.00	267.00
PG 11 =00 BALUN KIT		33.00

PALOMAR ENG	REGULAR	SALE
RF-100 NOISE BRIDGE/SWR/PWR & RESISTANCE		99.00
VLF-4 VLF CONVERTER (0-500 kHz TO 80 METERS		79.00
VLF-5 VLF CONVERTER (0-500 kHz TO 40 METERS		79.00
LB-1 LOW NOISE BOOM WITH ROTATOR		79.00
SPEC-1 SPECTRUM LOOP/PRE FOR 500-1400MHz D-10PM		99.00
TBM310 KIT FOR RF LAB		79.00
TBM310A FACTORY WIRED		99.00
P-310 TRANSCEIVER PREAMP 110VAC		47.00
P-310A TRANSCEIVER PRE-AMP (TBM) WITH BAND SO-135MHz		47.00
P-310X TRANSCEIVER PRE-AMP RF 12VDC		189.00

RECORD-A-CALL	REGULAR	SALE
AUTO 400 AUTOMATIC PHONE ANSWERING	149.95	134.95
VOX 700 AS ABOVE WITH VOX UNLIMITED REC CAPACITY	199.95	179.95
REMOTE BOX ALL ABOVE PLUS REMOTE PLAYBACK FOR MODELS	49.95	44.95
REMOTE 700 CALL ALBOVE PLUS REMOTE DUTCHING AND CHECK-IN	69.95	62.95
BELL ENCLOSE LOOP DUTCHING TAPE 10 TO 120 SEC		5.00
TCBM ENCLOSED INCOMING TAPE TIME DO HOUR		5.00
12AMP AS ABOVE 60 MIN		5.00
RM-1 EXTRA REMOTE KEY FOR 600 SPECIFY TYPE		5.00

RPT ELECTRONICS	REGULAR	SALE
RPT-100 2 MTR REPEATER 25 WATTS SOLID STATE	995.00	895.00
RPT-220 220 MHz REPEATER 15WATTS SOLID STATE	795.00	695.00
RPT-450 450 MHz REPEATER 15WATTS SOLID STATE	795.00	695.00

ROBOT

ROBOT RESEARCH	REGULAR	SALE
400 SLOW SCAN TV CONVERTER	795.00	695.00
600 COMPUTER INTERFACE KIT SCREEN MEMORY ETC	995.00	795.00
SAMMY VH-450M 9 INCH B&W MONITOR	345.00	199.00
1200 TELEVISION CAMERA	995.00	895.00

ROHN TOWER	REGULAR	SALE
25G 25 FT TOWER SECTION		69.50
2SBG-2 TOP SECTION W/SUPPORT TUBE 2 1/4" OD	65.50	60.00
2SBG-3 TOP SECTION W/SUPPORT TUBE 3" OD	69.50	63.00
2SBH SHORT BASE TO MOUNT IN CONCRETE	53.95	50.00
2SBHM SHORT BASE TO MOUNT ON ROOF	53.95	50.00
2SBP BASE MOUNTING PLATE	34.50	31.00
2SBPG BASE MOUNTING PLATE	34.50	31.00
2SBPG-2 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
2SBPG-3 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
2SBR ROOF MOUNT	47.00	43.00
2SBRM ROOF MOUNT	59.00	54.00
2SBS SIDE MOUNT		49.00
2SBX ACCESSORY SHELF (ROTOR PLATE)		13.00
2SBXM ACCESSORY SHELF TRIANGLE MOUNT	29.50	27.00
2SBZ GUY ASSEMBLY	17.50	15.00
2SBZA GUY ASSEMBLY (BRACKET w/ TO 3/4"	19.50	17.00
2SBZB GUY BUSHING FOR 2SBG-3	5.50	5.00
2SBZC ROTOR BASEPLATE	27.00	25.00
2SBZD HDMK PLATFORM	34.00	31.00
2SBZE ANTENNA PITCHER FIXTURE	34.00	31.00
3SA GUY LINE INSULATOR		4.50
10BX 10 FT STEEL MAST 2 INCH OD	27.95	24.95
10BXW 10 FT STEEL MAST HEAVY WALL 2 IN OD	59.50	49.50
3/16 BBB GUY CABLE 7X7 FOR 60 FT		14.00
3/16 CGH 3/16 CABLE CLAMPS FOR GUY CABLE		3.50
3/16 GTB GUY CABLE TURNBUCKLE EYE		3.50
3/16 TBJ TURNBUCKLE EYE AND JAW		10.00
3/16 THT 3/16 THIMBLES FOR CABLE LOOP FT		4.50
3SBG-3 TOP SECTION W/SUPPORT TUBE 3" OD	69.50	63.00
3SBH SHORT BASE TO MOUNT IN CONCRETE	53.95	50.00
3SBHM SHORT BASE TO MOUNT ON ROOF	53.95	50.00
3SBPG BASE MOUNTING PLATE	34.50	31.00
3SBPG-3 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
3SBR ROOF MOUNT	47.00	43.00
3SBRM ROOF MOUNT	59.00	54.00
3SBS SIDE MOUNT		49.00
3SBX ACCESSORY SHELF (ROTOR PLATE)		13.00
3SBXM ACCESSORY SHELF TRIANGLE MOUNT	29.50	27.00
3SBZ GUY ASSEMBLY	17.50	15.00
3SBZA GUY ASSEMBLY (BRACKET w/ TO 3/4"	19.50	17.00
3SBZB GUY BUSHING FOR 3SBG-3	5.50	5.00
3SBZC ROTOR BASEPLATE	27.00	25.00
3SBZD HDMK PLATFORM	34.00	31.00
3SBZE ANTENNA PITCHER FIXTURE	34.00	31.00
10BX 10 FT STEEL MAST 2 INCH OD	27.95	24.95
10BXW 10 FT STEEL MAST HEAVY WALL 2 IN OD	59.50	49.50
3/16 BBB GUY CABLE 7X7 FOR 60 FT		14.00
3/16 CGH 3/16 CABLE CLAMPS FOR GUY CABLE		3.50
3/16 GTB GUY CABLE TURNBUCKLE EYE		3.50
3/16 TBJ TURNBUCKLE EYE AND JAW		10.00
3/16 THT 3/16 THIMBLES FOR CABLE LOOP FT		4.50
3SBG-3 TOP SECTION W/SUPPORT TUBE 3" OD	69.50	63.00
3SBH SHORT BASE TO MOUNT IN CONCRETE	53.95	50.00
3SBHM SHORT BASE TO MOUNT ON ROOF	53.95	50.00
3SBPG BASE MOUNTING PLATE	34.50	31.00
3SBPG-3 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
3SBR ROOF MOUNT	47.00	43.00
3SBRM ROOF MOUNT	59.00	54.00
3SBS SIDE MOUNT		49.00
3SBX ACCESSORY SHELF (ROTOR PLATE)		13.00
3SBXM ACCESSORY SHELF TRIANGLE MOUNT	29.50	27.00
3SBZ GUY ASSEMBLY	17.50	15.00
3SBZA GUY ASSEMBLY (BRACKET w/ TO 3/4"	19.50	17.00
3SBZB GUY BUSHING FOR 3SBG-3	5.50	5.00
3SBZC ROTOR BASEPLATE	27.00	25.00
3SBZD HDMK PLATFORM	34.00	31.00
3SBZE ANTENNA PITCHER FIXTURE	34.00	31.00
3SA GUY LINE INSULATOR		4.50
10BX 10 FT STEEL MAST 2 INCH OD	27.95	24.95
10BXW 10 FT STEEL MAST HEAVY WALL 2 IN OD	59.50	49.50
3/16 BBB GUY CABLE 7X7 FOR 60 FT		14.00
3/16 CGH 3/16 CABLE CLAMPS FOR GUY CABLE		3.50
3/16 GTB GUY CABLE TURNBUCKLE EYE		3.50
3/16 TBJ TURNBUCKLE EYE AND JAW		10.00
3/16 THT 3/16 THIMBLES FOR CABLE LOOP FT		4.50
3SBG-3 TOP SECTION W/SUPPORT TUBE 3" OD	69.50	63.00
3SBH SHORT BASE TO MOUNT IN CONCRETE	53.95	50.00
3SBHM SHORT BASE TO MOUNT ON ROOF	53.95	50.00
3SBPG BASE MOUNTING PLATE	34.50	31.00
3SBPG-3 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
3SBR ROOF MOUNT	47.00	43.00
3SBRM ROOF MOUNT	59.00	54.00
3SBS SIDE MOUNT		49.00
3SBX ACCESSORY SHELF (ROTOR PLATE)		13.00
3SBXM ACCESSORY SHELF TRIANGLE MOUNT	29.50	27.00
3SBZ GUY ASSEMBLY	17.50	15.00
3SBZA GUY ASSEMBLY (BRACKET w/ TO 3/4"	19.50	17.00
3SBZB GUY BUSHING FOR 3SBG-3	5.50	5.00
3SBZC ROTOR BASEPLATE	27.00	25.00
3SBZD HDMK PLATFORM	34.00	31.00
3SBZE ANTENNA PITCHER FIXTURE	34.00	31.00
3SA GUY LINE INSULATOR		4.50
10BX 10 FT STEEL MAST 2 INCH OD	27.95	24.95
10BXW 10 FT STEEL MAST HEAVY WALL 2 IN OD	59.50	49.50
3/16 BBB GUY CABLE 7X7 FOR 60 FT		14.00
3/16 CGH 3/16 CABLE CLAMPS FOR GUY CABLE		3.50
3/16 GTB GUY CABLE TURNBUCKLE EYE		3.50
3/16 TBJ TURNBUCKLE EYE AND JAW		10.00
3/16 THT 3/16 THIMBLES FOR CABLE LOOP FT		4.50
3SBG-3 TOP SECTION W/SUPPORT TUBE 3" OD	69.50	63.00
3SBH SHORT BASE TO MOUNT IN CONCRETE	53.95	50.00
3SBHM SHORT BASE TO MOUNT ON ROOF	53.95	50.00
3SBPG BASE MOUNTING PLATE	34.50	31.00
3SBPG-3 BASE MOUNTING PLATE W/CONCRETE BASES	49.50	45.00
3SBR ROOF MOUNT	47.00	43.00
3SBRM ROOF MOUNT	59.00	54.00
3SBS SIDE MOUNT		49.00
3SBX ACCESSORY SHELF (ROTOR PLATE)		13.00
3SBXM ACCESSORY SHELF TRIANGLE MOUNT	29.50	27.00
3SBZ GUY ASSEMBLY	17.50	15.00
3SBZA GUY ASSEMBLY (BRACKET w/ TO 3/4"	19.50	17.00
3SBZB GUY BUSHING FOR 3SBG-3	5.50	5.00
3SBZC ROTOR BASEPLATE	27.00	25.00
3SBZD HDMK PLATFORM	34.00	31.00
3SBZE ANTENNA PITCHER FIXTURE	34.00	31.00

SHURE

SHURE MICROPHONES	REGULAR	SALE
526T DYNAMIC IMPEDANCE MICH MIC W/CALL LETTERS	60.00	51.95
526T DYNAMIC AMPLIFIED DESK MIC	87.00	79.00
540C CONTROLLED MAGNETIC HAND MIC CSC CORD	49.00	42.00

SONY SHORTWAVE	REGULAR	SALE
ICF-2001 DEN COVE HOW/DIGITAL TUN/LCD/SCAN/WEA	249.95	199.95
ICF-4900W 31 BAND/DIGITAL DISPLAY/DEN COVE HOW	699.95	599.95
ICF-7600 31 BAND/DIGITAL DISPLAY/HIGH QUALITY RCVR	449.95	399.95
ICF-5W HIGH QUALITY AM BROADCAST RECEIVER W/FM	89.95	79.95
ICF-6000 DUAL CONVERSION PORTABLE RCVR	249.95	199.95
ICF-1 SONY3 FINEST PORTABLE ALL BYOM COVER REC	1795.00	1595.00
ICF-2001D DEN COVE DIGITAL DISPLAY AC/DC ALL BANDS	249.95	199.95

SONY WALKMANS	REGULAR	SALE
WM-1 PORT STEREO CASSETTE W/LIGHT HDT HEADSET	199.95	179.95
WM-2 PORT STEREO CASSETTE W/LIGHT AS OF PLAYBACK	179.95	159.95
TCS-310 PORT STEREOCORDER W/ MIC/RECORD & PLAY	179.95	157.50
TCM-5000 PORT STEREOCORDER W/MIC/RECORD & PLAY	129.95	114.95
WM-100 THE ULTIMATE STEREO/PLAY W/HDPHONES	199.95	179.95

TELEX

TELEX HEADSETS	REGULAR	SALE
880-COMM 200 LIGHT WEIGHT BOOM MIC HEADSET 4140 IMP	99.95	89.95
990-COMM 200 DUAL PLUG BOOM MIC HEADSET HI/LO IMP	99.95	89.95
PB-1 FOOT SWITCH FOR PROCOMM HEADSETS		19.95
PB-2 PUSH-TO-TALK FOR PROCOMM HEADSETS		18.95
PC-1000 1000 SERIES HEADSET		49.95
PC-2000 2000 SERIES HEADSET		69.95
D-1200 DUAL PLUG HEADSET 3-30 OHMS	39.70	34.95
D-1300 DUAL PLUG HEADSET 3-30 OHMS	44.95	39.95
CS-7 DUAL PLUG HEADSET	49.00	44.95
HTC-2 LIGHTWEIGHT MONAURAL SPEAKER MIKE 3-30 OHM		34.95

TEN-TEC

TEN-TEC INC	REGULAR	SALE
ASSEMBLY AMP 40WM 160/ 2M 20-10 METERS	429.00	399.00
DENTY 2 DIGITAL 160-10 METERS 40WM	1295.00	1195.00
DELTA DIGITAL 160-10 METERS 40WM	1395.00	1295.00
237 ANTENNA TUNER	249.00	229.00
238T ANT TUNER SWR BRIDGE	129.00	119.00
239 SUPPLY 110/220VAC FOR ARGOSY	139.95	129.00
240 DELUXE SUPPLY 110/220VAC FOR 40WM	199.00	179.00
HERCULES 1 KW LINEAR OLD STYLE/SUPPLY	1599.00	1299.00
244 ELECTRET MIC FOR 534	129.95	119.00
245 MIKE PAD		19.95
246 REMOTE VFO FOR 546C	199.95	179.95
247 REMOTE VFO FOR 546	199.95	179.95
248 ANT TUNER 1KW		249.00
249 DYNAMITE SUPPLY 110/220VAC HEATER		99.95
250 ANT TUNER 1KW/SWR/PWR METER		249.00
251 ANT TUNER 1KW/SWR/PWR METER		249.00
252 MATCH BOX FILTER FOR 40WM/546C		49.95
253 CW FILTER FOR 40WM/546C		49.95
254 2 KW ANTENNA TUNER W/SWR BRIDGE 440AV	349.00	299.00

TRAC

TRAC ELECTRONICS	REGULAR	SALE
10-100 OMNI ELECTRONIC VOICE	49.95	44.95
10-101 OMNI ELECTRONIC VOICE	59.95	53.95
10-200 OMNI ELECTRONIC VOICE/DIGITAL VOICE	69.95	62.95
10-201 MESSAGE MEMORY VOICE	69.95	62.95
10-202 MESSAGE MEMORY VOICE	79.95	71.95
10-203 CHAMPION MESSAGE MEMORY VOICE	109.95	98.95
10-203 CHAMPION MESSAGE MEMORY VOICE	109.95	98.95
10-204 DX PROCESSOR AND OMNI VOICE DELUXE	139.95	125.95

TRIONYX INC

	REGULAR	SALE
TR-1000 10MC TO 600MC /P PRI 7 DIGIT COUNTER	199.95	179.95

VAN GORDEN ENG

	REGULAR	SALE
2-80 80 METER DIPOLE 120 FT		31.00
2-40 40/20 METER DIPOLE 66 FT		31.00
2-20 20 METER DIPOLE 33 FT		31.00
2-15 15 METER DIPOLE 22 FT		31.00
2-10 10 METER DIPOLE 16 FT		31.00
80-40 80/40/15 METER FOLDED DIPOLE 120 FT		37.00
80-40 40 METER TRAP DIPOLE 66 FT		31.00
80-10 80/40/20/15/10 METER FOLDED DIPOLE 120 FT		37.00
40-10 40 THRU 10 METERS FOLDED DIPOLE 66 FT		37.00
40-10W 40/20/15/10 METER FOLDED DIPOLE 66 FT		37.00
40-10H 40/20/15 METER FOLDED DIPOLE 66 FT		37.00
D-1 SEALED CAN SUPPLY LOAD 1KW 15 SECONDS		19.95
D-2 SEALED CAN SUPPLY LOAD 1KW CONTINUOUS		39.95
CENTER INSULATORS TO 80-20M KUPLON BRASS ETC		5.00
END INSULATORS		5.00

VIBROPLEX

	REGULAR	SALE
IAMBIC DELUXE CHROME PLATED IAMBIC DUAL PADDLE	99.95	89.95
IAMBIC STANDARD CHROME PLATED PADDLE	79.95	69.95
VIBRO-KEYER DELUXE CHROME PLATED PADDLE	69.95	59.95
VIBRO-KEYER STANDARD CHROME PLATED PADDLE	59.95	49.95
PRESENTATION DUPLEX BASE	39.95	34.95
ORIGINAL STANDARD KEY	34.95	29.95
ORIGINAL STANDARD KEY	34.95	29.95
LIGHTLINE DUPLEX BASE	34.95	29.95
LIGHTLINE BUG STANDARD KEY	34.95	29.95
CHAMPION AUTOMATIC KEY	34.95	29.95

VIC-20 COMPUTERS

	REGULAR	SALE
VIC-20 HOME COMPUTER 4K GRAPHICS/COLOR BASIC		289.90
VIC-1530 DATASETTE TPE RECORDER FOR VIC-20		79.00
VIC-1515 VIC GRAPHIC PRINTER 80 COL 30 CPS		379.00
VIC1210 3K MEMORY EXPANDER CARTRIDGE		39.90
VIC1110 8K MEMORY EXPANDER CARTRIDGE		59.90
VIC1011A RS232C TERMINAL INTERFACE		49.90
VIC1112 IEEE-488 INTERFACE CARTRIDGE		99.00
VIC1211A VIC20 SUPER EXPANDER w/3 RES GRAPHICS		69.90

VIC COMM PRODUCTS

	REGULAR	SALE
5/8 WHIP COLLAPSIBLE 17" WHIP FOR 2 METER MALIBUS		14.95
1/4 WHIP MINI-GUN 2 METER MINI-GUN ANTENNA 5/16 THREADS	16.95	13.95
2SB 2 MTR POWER BOOSTER 2 TO 20 WATTS	129.95	119.95
2SBD 2 MTR POWER BOOSTER 2 TO 80 WATTS	179.95	159.95
2SBDM 2 MTR POWER BOOSTER 2 TO 80 WATTS MOBILE	199.95	179.95
1/4 WHIP FOR MALIBU 2 MTRS BNC FOR MALIBUS	12.95	10.95

UNADILLA/REYCO

| | REGULAR | S

SOME BASIC MATH

FROM MICROLOG

START WITH
THE FANTASTIC
ATR-6800 SYSTEM
FOR RTTY/CW . . .

PLUS!

"BASIC" COMPUTER LANGUAGE	— Write and load programs in easy to use "BASIC".
+	
COMMUNITY MAILBOX	— Enter, store, replay, delete etc. individual messages remctely.
+	
CONTEST DUPE SHEET	— Did you work him or not? When? etc. or use for personal station log.
+	
MESSAGE EDITOR	— Create perfect message quality text with editing capabilities.
+	
24K BATTERY-BACKED MEMORY	— Never lose your MAILBOX, station LOG, DUPE sheet or program. 24K = 24576 characters.

= The most complete communications system available today (or for years to come!)

With the addition of this one internal multi-function board and basic module to your ATR-6800, ALL of the above features are available, as well as the superior RTTY/CW performance in one attractive RFI PROOF package.

Factory installed for $599, contact us for scheduling at 18713 Mooney Dr., Gaithersburg, Md. 20879. Tel. 301-258-8400. ATR-6800 with 9" video $2,495.

-51

MICROLOG

INNOVATORS IN DIGITAL COMMUNICATIONS

Confidential Frequency List

New 5th edition by Perry Ferrell

Bigger and better than the world-acclaimed 4th edition, this new book has 30% more stations listed, more than 7500 operating between the international broadcasting and amateur radio bands, spanning 4-28 MHz. Listings by both frequency and callsign reflect present and post-WARC assignments. Complete list of Coastal CW stations plus Embassy, Aeronautical, Military, Time Sigs, Feeders, VOLMET, FAX, INTERPOL, etc. New details on scheds, emergency channels, alternates, and never-before-published IDs.
In USA: $9.95 Book Mail, or $12.00 UPS.
Outside USA: Book Mail US$11.00.
Overseas Airmail: US$14.00 + US$3.30
Registration to assure delivery.

GILFER SHORTWAVE
DEPT. 736, BOX 239, PARK RIDGE NJ 07656

MFJ CW/SSB/Notch Filters

MFJ-722 ALL MODE audio filter for CW/SSB has tunable 70 dB notch, no ring 80 Hz CW bandwidth, steep SSB skirts (18 poles total), 2 watts for speaker plus more.

All mode versatility:
razor sharp CW and steep-skirted SSB filtering with tunable notch eliminates QRM.

$69.95

New super-selective filter. The new **MFJ-722** "Optimizer" offers razor sharp, no ring CW filtering with switch-selectable bandwidths (80, 110, 150, 180 Hz centered on 750 Hz), steep-skirted SSB filtering, and a 300-3000 Hz tunable 70 dB notch filter with adjustable bandwidth.

The 8-pole (4 stage) active IC filter gives CW performance no tunable filter can match (80 Hz bandwidth gives -60 dB reponse one octave from center and up to 15 dB noise reduction). The 8 pole SSB audio bandwidth is optimized for reduced sideband splatter and less QRM (375 Hz highpass cutoff plus selectable lowpass cutoffs at 2.5, 2.0 and 1.5 KHz, 36 dB/octave rolloff). Measures 5x2x6".

New Model MFJ - 723, ($49.95), is similar to the 722 but is for CW. Has a 60 dB notch tunable from 300 to 1200 Hz. Measures 4x2x6".

Other models: MFJ - 721, $59.95. Like 722, less notch. **MFJ - 720, $39.95.** Like 723, less notch.

Versatile, all models plug into the phone jack, provide 2 watts for speaker or can be used with headphones. All require 9-18 VDC or 110 VAC with optional adapter, MFJ-1312, $9.95.

Order from MFJ and try it-no obligation. If not delighted, return it within 30 days for refund (less shipping). One year unconditional guarantee.

Order today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for amount indicated plus $4.00 each shipping and handling.

Enjoy improved readability, order now.

CALL TOLL FREE . . . 800-647-1800

Call 601-323-5869 in Miss., outside continental USA **or** for technical info., order/repair status.

MFJ ENTERPRISES, INCORPORATED
P.O. BOX 494, MISSISSIPPI STATE, MS 39762 -47

ASSOCIATED RADIO 913-381-5900

8012 CONSER BOX 4327
OVERLAND PARK, KANSAS 66204

BUY—SELL—TRADE

All Brands New & Reconditioned

SPECIAL — MAY - JUNE DOUBLE KENWOOD COUPONS

IF YOU DIDN'T GET YOUR COUPONS—CALL US.

SAVE—SAVE—SAVE

MasterCard VISA

NOTE: SEND $1.00 FOR OUR CURRENT CATALOG OF NEW AND RECONDITIONED EQUIPMENT
SEND $1.00 FOR OUR WHOLESALE LIST OF UNSERVICED & OVERSTOCK ITEMS.
SEND $2.00 FOR BOTH. THEY WILL BE MAILED SEPARATELY.

John H. Klingelhoeffer WB4LNM
2608 Vantage Cove
Annapolis MD 21401

Are You Ready for 900 MHz?

This article is based on a paper given at the 27th Annual VHF Conference, Western Michigan University, Oct. 17, 1981, Kalamazoo MI.

Since the proposal and decision to allocate the 902-928-MHz segment of the UHF spectrum to the Amateur Service,[1] VHF/UHF enthusiasts and experimenters have wondered how best to utilize this new resource and what equipment would be needed to communicate efficiently on it. This article will address those topics and will propose a band plan for the amateur community based on experience with other VHF/UHF bands and proven radio-frequency design techniques.

History

Recent use of the frequency spectrum from 902-928 MHz in the United States has been for radio-frequency heating, i.e., the Industrial, Scientific and Medical (ISM) service. Early commercial and consumer microwave ovens used this wavelength, although most now have changed to 2450 MHz for improved performance at this higher frequency.[2] Most ISM heating devices (typically magnetrons) are tuned to a center frequency of 915 MHz and, with their pulsed power operation, generate considerable amounts of energy in the form of sidebands. Thus, guard bands of plus and minus 13 megahertz about the center frequency were adopted to minimize interference with services in immediately adjacent allocations.

Warning: The 915-MHz frequency was originally chosen for its heating effects on substances with high water content such as food and, unfortunately, human flesh!

The ISM service will share the new amateur allocation on a secondary, non-interference basis as the proposals now stand. Both services will share the band with Government Radiolocation (radar), which will have primary status (this is the case in many UHF/microwave amateur bands). In addition, other restrictions provide that the new band will not be available to the Amateur Satellite Service and that it may be susceptible to interference by Automatic Vehicle Monitoring (AVM) systems pending consideration by the Federal Communications Commission.[3]

Propagation

The new UHF allocation has shown in commercial land mobile tests that it behaves much as expected—attenuation by natural objects such as trees and earth will be greater than on 450 MHz, necessitating increased effective radiated power. However, in urban areas, because of the much shorter wavelength, its specular reflection allows much better coverage in areas forested by tall buildings and tunnel structures.[4]

Much research has already been accomplished by the commercial community in its quest to proliferate the cellular mobile radiotelephone services into the 825-to-890-MHz area. Several excellent articles have appeared documenting extensive tests that have been performed in a variety of areas (mostly metropolitan) around the United States.[5,6,7] The operational characteristics of amateur mobile FM voice should parallel these results quite closely.

One area of concern in using the new 33-centimeter band for mobile communication is the rate of signal cancellation and addition (mobile flutter). At two meters, the same phenomenon that causes lost words during transmissions will, at 900 MHz, add a low-frequency buzz to demodulated audio. At speeds of 30 to 60 miles per hour, the frequency of this tone will be approximately 80 to 160 Hz for a transmission frequency of 915 MHz. Although this is not a problem for voice intelligibility (it can be filtered out by appropriate audio high-pass filtering), it does cause the present continuous tone subaudible squelch (CTSS), known more popularly by its trade name, Private Line,[8] to malfunction by unsquelching a receiver when there is actually no transmitted CTSS tone. Thus, different selective-signaling methods, perhaps tone burst or digital squelch composed of a short duration serial-bit stream at the beginning of each transmission, would be required for reliable operation.

902.0 MHz – CW/SSB
902.6 MHz – FM voice/RPT
(mobile receive, RPT transmit)
906.0 MHz – ATV Channel A
912.0 MHz – ATV Channel B
918.0 MHz – ATV Channel C
924.0 MHz – FM voice/RPT
(mobile transmit, RPT receive)
927.4 MHz,
928.0 MHz – Control Links, Packet Transmissions

The band plan proposed by WB4LNM in October, 1981, for 902-928 MHz.

Hardware

Equipment for communicating at 900 MHz is another area where the commercial communications services are helping almost as much as when they dumped thousands of old VHF high-band transceivers on the amateur market in the late 1960s. Although it will be many years before the new cellular radios will be available as surplus, the components and technology used in these transceivers will be produced in mass quantities for the many tens of thousands of

OUR NEW BANDPASS-REJECT DUPLEXERS WITH EXCLUSIVE

B_pB_r CIRCUIT FILTERS®

. . . provides superior performance, especially at close frequency spacing.

Models available for all commercial and ham bands. Special prices for amateur repeator clubs

79

WACOM PRODUCTS, INC.

P.O. BOX 7127 • WACO, TEXAS 76710
817/848-4435

MFJ/Bencher Keyer Combo

Deluxe MFJ Keyer fits on Bencher Paddle. Curtis 8044 IC. Iambic. Adjustable weight, tone, volume, speed. Semi and automatic modes. Solid state keying. RF proof.

MFJ-422 Combo **$99.95**

The best of all CW worlds - a deluxe MFJ Keyer in a compact configuration that fits right on the Bencher iambic paddle! You can buy the combination or just the keyer for your Bencher.

New MFJ Keyer—small in size, big in features. Curtis 8044 IC, adjustable weight and tone, front panel volume and speed controls (8-50 wpm). Built-in dot-dash memories. Speaker, sidetone, and push button selection of semi-automatic/tune or automatic modes.

Ultra-reliable solid state keying: grid-block, cathode and solid state transmitters (-300 V, 10 mA max., +300 V, 100 mA max.). Fully shielded. Uses 9 V battery or 110 VAC with optional adapter, MFJ 1312, $9.95.

Beautiful functional engineering. The keyer mounts on the paddle base to form a small (4 1/8 x 2 5/8 x 5 1/2") attractive combination that is a pleasure to look at and use.

47

MFJ-422X Keyer only **$69.95**

The Bencher Paddle is a best seller. Fully adjustable gold-plated silver contacts, lucite paddles, chrome plated brass, heavy steel base with non-skid feet.

Order from MFJ and try it - no obligation. If not delighted, return it within 30 days for refund (less shipping). One year unconditional guarantee.

Order today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for amount indicated plus $4.00 each shipping and handling.

Enjoy CW. See dealer or call MFJ now.

CALL TOLL FREE . . . 800-647-1800

Call 601-323-5869 in Miss., outside continental USA **or** for technical info., order/repair status.

MFJ ENTERPRISES, INCORPORATED

Box 494, Mississippi State, MS 39762

The 1982 Atlanta HamFestival and ARRL Southeastern Division Convention June 12 - 13, 1982

Downtown Atlanta Marriott Hotel

- GIANT covered Fleamarket/Swapshop!
- More than 25 Forums/Meetings!
- FCC Exams!
- Parking for thousands of cars!
- 140 Major Exhibits!
- Special MICROPROCESSOR Section!
- Programs for Ladies & Children
- Activities Galore!

Registration: $5 per person IN ADVANCE, $6 at the door (add $1 for your spouse, children FREE)

If you do not receive a Preregistration packet by May 15, write:
Atlanta HamFestival • P.O. Box 82412 • Atlanta, GA 30354

Hotel rates: $50 per day single OR double

Write for Hotel Reservations to:
Marriott Hotel • Courtland at International Blvd. • Atlanta, GA 30303
or phone: Area 404/659-6500 and hurry, hurry, hurry!

THE BEST HAMFEST IN THE WORLD!

See List of Advertisers on page 114

mobile radiotelephone users that are expected to populate the adjacent commercial band in the next few years. Several semiconductor manufacturers already are producing components that will work well in amateur transceivers.[9,10,11]

For those who don't want to build down to the basics, there are also hybrid power-amplifier modules that require little more than application of proper drive signals, power-supply voltages, and heat sinking.[12] These would be suitable for FM, PM, or CW operations, and require only 250 milliwatts of input energy for 7.5 or 20 Watts output.

Receiver designs will be of the same general superheterodyne style we are accustomed to, but with significant differences in the construction of the rf amplifier and first mixer stages. To enhance selectivity, small cavity resonators or helical resonators will be used for their low-loss characteristics and their physical size, which will reach manageable proportions at this wavelength. Gallium arsenide field-effect transistors, once expensive devices for commercial and military systems, will be employed to minimize noise figures when used ahead of Schottky diode double-balanced mixers known for their inherent excellent wide dynamic range. The cost of these mixers continues to decrease as they are used in more and more communication systems. Several manufacturers already offer, in small quantities, preassembled mixer modules that work to 1 GHz for under ten dollars.

Building at 900 MHz will introduce the newcomer to a different attitude toward the components he uses. The rules here are, "the only good leads are no leads," and, "it may look like a capacitor to you but what does it look like to the circuit?" At this frequency, a one-eighth-inch lead of #22 AWG wire on a 270-picofarad disc capacitor exhibits an inductive reactance larger than the capacitive reactance of the capacitor. Thus, the capacitor at this frequency is actually acting as an inductor.

Chip capacitors, capacitors with no leads at all, are frequently used where this effect becomes a problem. Although they are reasonably expensive, their price can be expected to decrease since the production process for manufacturing them is automated and they are now being used in the computer industry to help digital devices comply with stringent new radio frequency interference regulations.

One of the toughest problems to tackle will be that of frequency stability, especially in mobile and portable equipment. Consider a typical transmitter crystal of frequency 33.4074 MHz (902 MHz divided by 27), with a tolerance of 0.001% over the extremes of temperature, shock, and voltage. This crystal could exhibit a drift of 9 kHz at 902 MHz and still be within specification. If the new amateur band were to follow the normal 25-kHz channel spacing and 13-kHz occupied bandwidth used on 450 MHz, it is obvious that the communications system would suffer great degradation in both adjacent channel selectivity and demodulation distortion if this crystal were used.

Several ingenious ideas have been proposed to alleviate this stability problem, or at least to transfer the problem to a station capable of maintaining an accurate frequency standard.[13] If the mobile transmitters were designed to operate in full duplex mode, the signal received from the repeater (assumed to be stable and accurate) could be used as a reference to which the mobile transmitter could be frequency-locked. Since the vast majority of vehicular operation on this band will most certainly be tied to repeater systems, this method represents a very cost-effective solution. The band plan suggested later in this article was developed with this concept in mind.

Another positive aspect of a full duplex system is that it will allow the operator to gain immediate knowledge of how well he is communicating with the retransmission site, because he will be able to listen to his own signal as it is retransmitted (perhaps at reduced volume in the receiver to prevent audio feedback).

Antennas for the 33-cm band will be small enough to be built easily with simple hand tools and mounted on masts no larger than small television antennas. A fourteen-element parasitic yagi-uda array, which magnifies a transmitter's power 16 times, occupies a space of only 6.5 by 28.5 inches. Corner reflectors, which have never been widely used by amateurs at lower frequencies, are easily constructed and offer a decent amount of gain and fairly wide bandwidth. Of course, for those who can afford the price (and have no neighbors), a four-meter diameter parabolic dish gives about 27 dB gain and can be used on the higher microwave bands as well.

Using It

Many different ideas, amateur conventions, and technological factors were considered when attempting to formulate a band plan that would serve all the needs of the amateur fraternity. The following plan is the distillate of those components.

One aspect of the hobby that appears to be in a growth mode is that of fast-scan television and computer-generated video. On the 70-centimeter band, the wide, buzzing video carriers are not well received (more accurately, not welcome) near the weak-signal satellite downlink subband from 435-438 MHz. This has prompted ATV, in several metropolitan areas of the country, to move to 23 cm in search of usable spectrum. However, the expected allocation of 1260-1270 MHz to the amateur satellite service,[1] coupled with the recent removal of amateur operating privileges from 1215 to 1240 MHz for military navigational satellite systems (NAVSTAR, GPSS),[3] as well as the difficulty of generating healthy amounts of power at 23 cm, makes this band less than desirable for fast-scan television.

I am proposing, therefore, that three 6-MHz-wide standard video channels (with multiplexed FM voice if desired) be centered in the proposed band plan. Since these three channels would be broadcast standard video format and frequency spacing, only one local oscillator per down-converter would be needed to mix all three down to contiguous VHF or UHF broadcast channels for display on a standard unmodified television receiver.

For the FM crowd, the band plan proposes 128 new FM channel pairs spaced at 25 kHz, with the transmission and reception frequency difference (split) at 21.4 MHz. This would allow use of relatively inexpensive monolithic crystal filters at an intermediate frequency of 21.4 MHz and the frequency-locking of transmitters to received pilot carriers from repeaters. Although this is an extremely low first i-f for a radio of this type, a judicious mix of image-cancelling mixer technology and low-loss

WORLD TIME WATCH

the first microprocessor watch made especially for hams

24 hr. timer

microprocessor water resistant

solar assist

New Low Price —$59.95

The HAM-1 functions include local time, world time, (G.M.T. too) count-up and count down chronometer, day, month, date, alarm and hourly chime. It's ideal for log-keeping, DX time conversion and 10 minute I.D. timing. The HAM-1 features a high contrast Seiko display and solar cell battery assist. Battery life is better than 4 years. The HAM-1 is water resistant to 20 meters, the case is 100% solid stainless steel and the crystal is scratch resistant mineral glass. The HAM-1 is rugged and durable and has a 1 year warranty.

2 METER AMPLIFIER $39.95

• 2 Watts In, 10 Watts Out • V.S.W.R. Protected • Can be Used for F.M. & S.S.B. • Led Status Indicators • Low Loss SO-239 Connectors • Current Drain Less Than 2.5A at 13.6 V.D.C. • Massive Heatsink • Built In T/R Switch

TEMPO S-1 UPGRADE KITS $39.95

Upgrade your early Tempo S-1 to current Production Specifications, kits include: • 450 M.A.H. Battery Pack • New Case Assembly • All New Escutcheons • Spkr./Mic. Jack w/Dust Cap • New Earphone & Jack • P.C.B. and Parts for Easy Installation • Detailed Instruction Manual • For Radios With & Without T.T. Pad.

Other Accessories Available:

Spkr/Mic. Designed for S-1's. . . $24.95
Heavy Duty Belt Clip. 7.50
Flex Antenna 6.00

To Order Call or Write to:

ADVANCED COMMUNICATIONS INTERNATIONAL
2411 Lincoln Avenue ↩448
Belmont, CA. 94002 U.S.A.
(415) 595-3949

Add $3.00 per order for shipping & handling. California residents add 6% sales tax. Visa, Master Charge accepted.

NEW MFJ-312 VHF Converter lets you

HEAR POLICE/FIRE CALLS

and Weather Band on 2 meter rigs. Covers nearly all FCC allocated police/fire VHF-hi freq. (154-158 MHz). Direct freq. readout on synthesized, VFO 144-148 MHz FM rigs.

Now with weather band coverage!

Scanning rigs become police/fire scanner.
Direct freq. readout on synthesized and VFO rigs.

$59.95

Hear exciting police/fire calls, weather band, maritime costal and more on your 2 meter rig!

Scanning rigs become police/fire scanner.

This ingenious MFJ VHF Converter turns your synthesized or VFO 144-148 MHz FM rig into a hot police/fire receiver (154-158 MHz) with direct frequency readout on your rig.

Receive weather plus more on 160-164 MHz.

Feedthru allows simultaneous scanning of both 2 meters and police/fire band. No missed calls.

Enjoy all benefits of your rig such as squelch, excellent sensitivity, selectivity, stability, limiting, AM rejection. For handhelds, too.

Two MOSFETS (tuned RF amp, mixer), bipolar crystal oscillator gives excellent performance.

Bypass/off switch allows transmitting. Won't burn out if you transmit (up to 25 watts) with converter on. Low insertion SWR.

"On" LED. 9-18 VDC. SO-239. Mtg bkt. 3x4x1".

MFJ-311, $49.95. Like MFJ-312 less WX band.

Order from MFJ and try it — no obligation. If not delighted, return it within 30 days for refund (less shipping). One year unconditional guarantee.

Order today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for $59.95 for MFJ-312, $49.95 for MFJ-311 plus $4.00 each shipping/handling.

Enjoy exciting police and fire calls, order now.

CALL TOLL FREE . . . 800-647-1800

Call 601-323-5869 for technical information, order/repair status. Also call 601-323-5869 outside continental USA and in Mississippi. ↩47

MFJ ENTERPRISES, INCORPORATED
Box 494, Mississippi State, MS 39762

MIRAGE MIRAGE MIRAGE

COMMUNICATIONS EQUIPMENT, INC.
MADE IN U.S.A.

5 YEAR WARRANTY

NEW for 220!
C22 AMPLIFIER
All-mode/2W in — 20W out
200MW to 5W Drive

$89.95

2 Meter "All Mode" Amplifiers
FM - SSB - CW

B108	10 W. in — 80 W. out	$179.95
B1016	10 W. in — 160 W. out	279.95
B3016	30 W. in — 160 W. out	239.95
B23	2 W. in — 30 W. out	89.95

These amplifiers, except B23, have built in RX preamps. The B108 and B1016 may be used with HTs or transceivers. They will key with 1 Watt input.

C106 AMPLIFIER
SSB, FM, CW
10W in — 60W out
2W in — 30W out

Dual Purpose for HT or Xcvr!

$199.95

RC-1 Remote Control $24.95

SEE YOUR NEAREST DEALER FOR INFORMATION

MIRAGE COMM. EQUIP., INC. • P.O. BOX 1393 • GILROY, CA 95020 • (408) 847-1857

↩See List of Advertisers on page 114

front-end filtering will provide good image rejection and sensitivity.

The portable equipment receive band is placed at the low end of the new spectrum, causing the image frequencies to be thrown into the avionics (DME, TACAN) band instead of the new cellular radiotelephone band. Since the smaller mobile transceivers have less room for cavity filters, that can be implemented more easily in fixed-retransmission sites. The ATV repeater-output spectrum is also located at the same end of the band as the FM voice repeater so that the two types of repeaters can be easily co-located. Point-to-point service for low-band repeater linking, packet-transmission techniques, and radio-command systems would be placed at the high end of the band.

Space has been reserved at the lower end of the band for weak-signal modes, SSB, and CW, as is common on the lower VHF and UHF bands. This 600-kHz swath allows for many 3-kHz sideband voice channels for tropospheric-scatter, moonbounce, and meteor-scatter experiments. Initial experiments may be carried out with little more than a returned 451-451.30-MHz commercial FM transceiver driving a varactor doubler for CW transmission. From past experience with both listening and operating on the other bands above 30 MHz, this will provide plenty of weak-signal spectrum space for the foreseeable future.

Conclusion

Techniques and equipment for the new amateur band from 902-928 MHz have been discussed. A band plan which tries to serve all users in the amateur community has been proposed. Particular emphasis has been placed on the need for fast-scan television transmission spectrum since it appears that ATV mode has been nudged out of other regions of the amateur spectrum. It is hoped that the discussion of the new UHF band will entice you to build or buy equipment and operate this frequency range no matter what your special interest is. With 26 MHz of spectrum, there is room for everybody! ■

References

1. Proceedings of the 1979 World Administrative Radio Conference.
2. "Microwave Ovens—Revolution in Cooking," D. R. McConnell, *Electronics World*, August, 1970.
3. "Happenings" column, W. D. Clift, *QST*, September, 1981.
4. *Microwave Mobile Communications*, W. C. Jakes, Jr., Wiley-Interscience, 1974. ISBN 0-471-43720-4.
5. "What Happens When 900 MHz Takes to the Hills," F. A. Barton, G. A. Wagner, *Communications Magazine*, March-April, 1974.
6. "Some Characteristics of Mobile Radio Propagation at 836 MHz in the Philadelphia Area," D. M. Black, D. O. Redudink, *IEEE Transactions on Vehicular Technology*, May, 1972.
7. "Examination of the Feasibility of Conventional Land Mobile Operation at 950 MHz," *FCC Research Division Report R-7120.*
8. Private Line: registered trademark of Motorola Communications Products, Inc., Schaumburg, Illinois.
9. "Rf Selector Guide and Cross Reference," Motorola Semiconductor Products, Inc., Phoenix, Arizona.
10. "Rf Communications Products," TRW RF Semiconductors, Lawndale, California.
11. *Data Sheets*, Communications Transistor Corporation, Inc., San Carlos, California.
12. *Data Sheets MHW820, MHW808*, Motorola Semiconductor Products, Inc., Phoenix, Arizona.
13. "'Logical' Design Relaxes Tough Crystal Standards," S. J. Lipoff, *Microwaves Magazine*, August, 1977.

TERMINALL

apple* + TRS-80*

TERMINALL is a hardware and software system that converts your personal computer into a state of the art communications terminal. Terminall features simple connections to your computer and radio plus sophisticated and reliable software.

Simplicity

TERMINALL was designed from the outset to be easy to connect to your radio and easy to use. Plug into your receiver headphone jack and copy Morse Code or radioteletype (RTTY). Plug into your CW key jack and send Morse Code. Attach a microphone connector and send Baudot or ASCII RTTY using audio tones (AFSK). That's all there is to hooking it up.

The software is loaded into your computer from disk or cassette. Enter your callsign and the time and you will start receiving immediately. No settings or adjustments are necessary to receive Morse Code, it's fully automatic -and it works! You may type your message while receiving or transmitting.

You will be on the air, receiving and transmitting in any mode, in minutes. As we said, TERMINALL is simple.

More for your money.

■ TERMINALL has the RTTY terminal unit - demod and AFSK -built in. This results in a lower total cost.

■ **Fantastic Morse reception.** Six stage active filter demodulator copies the weak ones. Auto adaptive Morse algorithm copies the sloppy ones. Received code speed displayed on status line.

■ **Outstanding documentation.** Professionally written, 90 page user manual contains step-by-step instructions.

■ **Built in, separate, multi-stage, active filter RTTY and CW demodulators.** No phase lock loops. RTTY demodulator has 170 and either 425 or 850 Hz shift-keyboard selectable - and uses either the panel meter or scope outputs for easy tuning. Copy the weak ones. Copy the noisy ones. Copy the fading ones.

■ **Built in crystal controlled AFSK.** Rock stable for even the most demanding VHF or HF applications. A must on many VHF RTTY repeaters.

■ **Built in 110 or 220** volt AC power supply.

■ **Built in parallel printer driver software.** Simply attach a parallel ASCII printer (e.g. the EPSON MX-80) to your printer port to obtain hardcopy in all modes.

■ **Multi level displays** - allows examining and editing of historical text.

■ **Word wrapping,** word mode editing, diddle, ignore carriage returns, user programmable end of line sequence, adjustable carriage width, multiple user-defined WRU, transmit delay (fixed, none or auto adaptive), break mode and more!

■ **The all-in-one TERMINALL design** makes it great for use on HF or VHF, Ham, Commercial, SWL or MARS! SWL's TERMINALL may be jumpered for either 425 or 850 Hz reception to copy news and weather services.

System Requirements

TERMINALL T1 Communications terminal for the TRS-80 Model I. Requires a Model I TRS-80, 16K RAM and Level II BASIC. Includes software on cassette and disk, assembled and tested hardware and an extensive instruction manual. **$499.**

TERMINALL T3 Communications terminal for the TRS-80 Model III. Requires a Model III TRS-80, 16K RAM and Model III BASIC. Includes software on cassette and disk, assembled and tested hardware and an extensive instruction manual. **$499.**

TERMINALL T2 Communications terminal for the APPLE II. Requires an APPLE II or APPLE II PLus with **48K** RAM and disk. Software is provided on disk in DOS 3.2 format. Use MUFFIN utility to convert to DOS 3.3 format. Includes software on disk, assembled and tested hardware and an extensive instruction manual. **$499.**

15 Day Money Back Trial Period on Factory Direct Orders

MACROTRONICS, inc.®
1125 N. Golden State Blvd.
Turlock, California 95380
DEPT. 73

TO ORDER (209) 634-8888 or 667-2888
We are experiencing telephone difficulties. — Please keep trying.

*TRS-80 is a Registered Trademark of Tandy Corp.
Apple is a Registered Trademark of Apple Computer Inc.
1 yr. Parts & Labor - Limited Warranty.

The communications terminal that does it all!

"BEEPER III"



"THE PROFESSIONAL TOUCH COMES TO AMATEUR RADIO!"

"BP-3 automatically provides a gentle high frequency beep at the beginning of each transmission and a low beep at the end. Virtually eliminates "talk-over"! Operates for up to one year on a single 9-V battery (not supplied). Can be directly interfaced to any transceiver which is keyed by grounding the PTT line (the PTT line voltage must be positive, not greater than 24 VDC, nor the current greater than 100 ma.) Works with virtually all modern gear. You've heard it; now you can have it!"

"ADD THE BEEP!"

"BP-3A Complete with case, cable, Standard 4-pin connectors ..... **39.95 pp**
BP-3B As above except without connectors. Add your own ..... **36.95 pp**
BP-3C Circuit-board version for custom installation ..... **29.95 pp**
All units assembled/tested. OH residents add 6% Sales Tax"

FAXSCAN INC. ✓85
3148 Dorf Drive • Dayton, Ohio 45418 TM

✓47

MFJ RF NOISE BRIDGE

Lets you adjust your antenna quickly for maximum performance. Measure resonant frequency, radiation resistance and reactance. Exclusive range extender and expanded capacitance range gives you much extended measuring range.

• Exclusive range extender • Expanded capacitance range • Series Bridge

$59.95

This MFJ-202 RF Noise Bridge lets you quickly adjust your single or multiband dipole, inverted Vee, beam, vertical, mobile whip or random system for maximum performance.

Tells resonant frequency and whether to shorten or lengthen your antenna for minimum SWR over any portion of a band.

MFJ's exclusive range extender, expanded capacitance range (±150 pf) gives unparalleled impedance measurements, 1 to 100 MHz. Simple to use. Comprehensive computer proven manual.

Works with any receiver or transceiver. SO-239 connectors. 2 x 3 x 4 inches. 9 volt battery.

Other uses: tune transmatch; adjust tuned circuits; measure inductance, RF impedance of amplifiers, baluns, transformers; electrical length, velocity factor, impedance of coax; synthesize RF impedances with transmatch and dummy load.

Order from MFJ and try it — no obligation. If not delighted, return it within 30 days for a refund (less shipping). This bridge is unconditionally guaranteed for one year.

To order, simply call us toll free 800-647-1800 and charge it on your VISA or MasterCharge or mail us a check or money order for $59.95 plus $4.00 for shipping and handling for MFJ-202.

Put this MFJ Noise Bridge to work improving your antenna. Order from MFJ or see dealer.

CALL TOLL FREE ... 800-647-1800

Call 601-323-5869 for technical information, order/repair status. Also call 601-323-5869 outside continental USA and in Mississippi.

MFJ ENTERPRISES, INCORPORATED
Box 494, Mississippi State, MS 39762

2300 MHz VARIABLE DOWNCONVERTER

ANTENNA KIT

$16.95

.32 WASHERS
31 SPACERS
MOUNTING BRACKET
6" RG 174 COAX
'F' CONNECTOR • 35" ROD
6½" x 4" P.V.C. PIPE
2 DRILLED END CAPS • HARDWARE

POWER SUPPLY KIT

$16.95

POWER TRANSFORMER	P.C. BOARD
COURSE TUNE POT.	RF CHOKE
FINE TUNE POT.	KNOB
3 'F' CONNECTORS	WIRE
RESISTORS & CAPS	2 SWITCHES
LED WITH HOLDER	4 DIODES
TERMINAL STRIP	LM 317 REG.

WOOD GRAIN CABINET WITH SILK SCREENED front and back $10.95 Extra

BUILT POWER SUPPLY.....$34.95

Complete Down Converter System
INCLUDES ANTENNA KIT POWER SUPPLY KIT CONVERTER KIT
SPECIAL $49.95

QUANTITY DISCOUNTS
Any Price in Adv.

10 pcs.	12% off
25 pcs.	18% off
50 pcs.	25% off
100 pcs.	30% off
1000 pcs.	35% off

No Mixing for Quantity Discount

PARTS

Converter P.C. Board Plated through holes for stability	$4.95
Power Supply P.C. Board	2.95
MRF 901	2.00
NEO2135	4.95
2835 Diodes	.95
.001 Chip Caps.	10/3.95
Choke Set of 4	1.95
LM 317 Regulator	1.25
'F' Connectors Chassis	.50
Wall Transformer 12 VAC 700 MA	4.95
'U' Bolt	.95
BALUN 75 to 300 ohm	1.95
BALUN for rabbit ears	2.95
*RG 59/U COAX WITH CONNECTORS FACTORY MADE	
100 Ft.	$17.50
50 Ft.	9.50
25 Ft.	5.75
3 Ft.	2.50

CONVERTER KIT

$16.95

P.C. BOARD PRE-DRILLED SOLDER PLATED WITH PLATED THROUGH HOLES FOR A MORE STABLE PICTURE.

NEW!! ....2137 HOT TRANS...

3	~~MRF 901 TRANSISTOR~~
2	HP 2835 Diodes
6	.001 Chip Caps.
9	Resistors
4	Prewound chokes
1	Electrolytic Cap.
1	Pre Made Probe

★WIRED P.C. BOARD TESTED, READY TO CONNECT TO CAN WITH PROBE & CABLE CONNECTOR ATTACHED. $24.95

We will tune converter board for $12.50
trouble shoot add 7.50
trouble shoot power supply..$12.50
plus any parts needed.

We will accept collect calls for orders only on Visa and Master Card
No C.O.D. Orders
To Order Call 1-317-255-7776—For information call 317-291-7262
Complete Kit Weighs 5 pounds. Please add Sufficient Postage

6950 NORTH MICHIGAN ROAD INDIANAPOLIS, IN 46268

ELECTRONIC RAINBOW inc ✓146

✓See List of Advertisers on page 114

look here

call toll free:nights
1-800-231-3057

(TEX. RES. Call Collect 7-10 PM CT, M.W.F. 1-713-721-7920)

days 1-713-658-0268

YAESU	FT1	2395.00
	FT902DM	1249.00
	FT101ZD/Mark 3	749.00
	FT208R/708R	289.00 ea.
ICOM	IC3AT/IC4AT	269.00 ea.
	IC25A	309.00
	IC730	Call
	IC2AT	249.00
	IC22U	269.00
ROBOT	800A (+ Rebate)	749.00
	400A (+ Rebate)	675.00
KLM	KT34XA	469.00
	KT34A	309.00
	144-14816C	89.95
DRAKE	TR5	995.00
	TR7A	1495.00
	R7A	1450.00
AEA	CKI	115.00
	CK2	89.00
	MBA-RO	269.00
	MBA-RC	349.00
ROCKWELL	KWM380	2795.00
COLLINS	HIS/N, Mods	
	Accessories 10% Off List	
KENWOOD	Complete Line	Call
AMPHENOL	Silverplate PL259	1.00
SAXTON	450 OHM Open Wire Ladderline	20¢/ft
BELDEN	9405, 8214, 9258, 8267 9251 RG 8A/U	45 ¢/ft
HAL	CWR685A + Keyboard	875.00
	CT2100	699.00
	KB2100	159.00
World Radio	TV Handbook	16.50 ppd. UPS
HYGAIN	TH7DX	349.00
10% Off	Curtis, Sherwood, Palomar	
BUTTERNUT	HF6V Vertical	100.00
TONNA	F9FT, 9 EL 2 Meter	30.00
KANTRONIC	Minireader	249.00
	MicroRTTY	249.00
ANTIQUE	Rare Tubes	Call!
MOSLEY	Antennas	Call!

↩ 45

MASTERCARD VISA

All prices fob Houston except where indicated. Prices subject to change without notice, all items guaranteed. Some items subject prior sale. Texas residents add 6% tax. Please add sufficient postage, balance collect.

MADISON
Electronics Supply
1508 McKinney
Houston, Texas 77010

Free UPS shipping on orders over $100.00

2 locations open Mon-Sat 10 am 'til 6 pm
Thurs & Friday 'til 9 pm

Mich. res. add 4%

KENWOOD
R. L. DRAKE
ICOM
TEN-TEC
YAESU
MFJ AND MORE!
CALL FOR QUOTES

HD73 ALLIANCE $99.95
TR8400 KENWOOD $385.00
3TBA HUSTLER $189.95
MFJ 989 $269.95

RSE HAM SHACK

2 locations
1207 W. 14 Mile Road, Clawson MI 48017
313-435-5660
31155 Plymouth Road, Livonia MI 48150
313-522-4232

↩ 117

Introducing

NOVAX
MOBILE CONNECTION

YOUR OWN AUTOPATCH FOR SIMPLEX OPERATION

ONLY $169.95 KIT

Wired and Fully Tested
$219.95 • Shipping $3.50 in U.S.A. • N.Y.S. Residents add appropriate sales tax

Hundreds already in operation • Call anyone—anywhere—anytime

NOVAX interfaces your standard 2 meter; 220; 450; etc. base station and DTMF (Touchtone) Telephone, using a high speed scan switching technique so that you can direct dial from your automobile or with the HT from the backyard or poolside —automatically. Easy installation. Ringback (reverse autopatch) option available for $29.95 kit—$39.95 factory wired.

- SMALL SIZE—(5" x 6" x 2")
- STATE OF THE ART CIRCUITRY 12–16 V.D.C.
- ADJUSTABLE ACTIVITY TIMER (clears out if mobile is out of range)
- EASY INTERFACING with radio audio & squelch circuit
- SINGLE DIGIT CONTROL (connect and disconnect)
- 3 MIN. CALL DURATION TIMER

TO ORDER—SEND Check—Money Order (MasterCard or Visa accepted) to: R.W.D. Inc., Oriskany, N.Y. 13424 or call (315)-829-2785

↩ 21

GOTHAM ANTENNAS

(305) 294-2033

SMALL LOT TRAP DIPOLES ✓417

MODEL	BANDS	LGTH	PRICE
TSL 8040	80.40	78'	$49.95
TSL 4020	40.20.15	40'	$47.95

SMALL LOT SHORTENED DIPOLES

SL-8010	80.40.20. 15.10	75'	$59.95
SL-160	160	130'	$36.95
SL-80	80	63'	$35.95
SL-40	40.15	33'	$34.95

FULL SIZE PARALLEL DIPOLES

FPD-8010	80.40.20. 15.10	130'	$49.95
FPD-4010	40.20.15.10	63'	$44.95

NEW! PORTABLE VERTICAL! IDEAL FOR APARTMENTS, CAMPING, TRAILERS!

Folds to 5' Package. No Radials. Required. Fully Assembled. Full Legal Limit. 1:1 VSWR

MODEL	BANDS	HGHT	PRICE
PV-8010	80-10	13'	$59.95

PROVEN DESIGN GOTHAM ALL BAND VERTICALS

V-160	160.80.40.20. 15.10.6	23'	$39.95
V-80	80.40.20 15.10.6	23'	$37.95
V-40	40.20.15.10.6	23'	$35.95

FAMOUS GOTHAM QUADS

2 Elements — 3 Bands Complete $119.95

CHAMPIONSHIP GOTHAM BEAMS

Full Size Complete from $79.95

DEALER INQUIRIES INVITED

CALL OR SEND **LARGE** SASE FOR CATALOG. Shipping: Dipoles & Verticals $2.50 USA; $7.00 Canada; $5.00 FPO, APO. Beams & Quads Shipped UPS or Freight Collect. Fla. add 4% Sales Tax

1415 First St. • Key West, FL 33040

MFJ-1200 GENERAL PURPOSE

CW Computer Interface

Connects computer to transceiver. Converts received audio to TTL/RS-232. Allows computer to key transmitter. For use with your computer and CW Keyboard/Reader program.

Allows your rig to "talk CW" to your computer and vice versa.

$69.95

A personal computer with an appropriate program can give you a complete and very versatile CW Keyboard/Reader. But you still need interface electronics to provide compatible signals between your transceiver and computer.

The MFJ-1200 CW Computer Interface processes (noise limits, filters, detects, post filters, shapes, level shifts) the received CW audio from your transceiver to provide a clean computer compatible TTL or RS-232 level.

It also takes the keyboard generated CW (TTL or RS-232 output levels) from your computer and drives high voltage keying circuits to key your tube or solid state transmitter (-300 V, 10 mA max; + 300 V, 100 mA max).

Has tuning, transmit, and "ON" LEDs. Reverse-normal switch inverts output level to computer. ON/OFF switch. 6x1¾x3 in. Black, eggshell white aluminum cabinet. Requires 6-9 VAC or 110 VAC with optional AC adapter, MFJ-1309AC, $9.95.

Order from MFJ and try it — no obligation. If not delighted, return it within 30 days for refund (less shipping). One year unconditional guarantee.

Order today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for $69.95 for MFJ-1200 plus $4.00 shipping and handling.

Use this MFJ-1200 to enjoy your computer as a CW Keyboard/Reader. Call MFJ or see dealer.

CALL TOLL FREE ... 800-647-1800

Call 601-323-5869 for technical information, order/repair status. Also call 601-323-5869 outside continental USA and in Mississippi. ✓47

MFJ ENTERPRISES, INCORPORATED

Box 494, Mississippi State, MS 39762

Hi Pro Mk II

LB-VHF-UHF REPEATERS SOON TO BE FCC TYPE ACCEPTED

NEW!

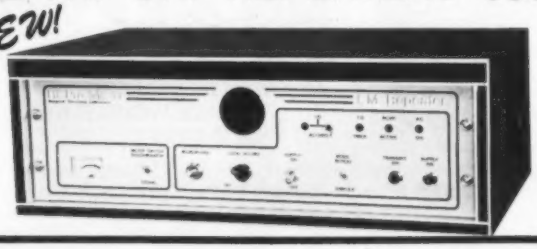

AMATEUR DISCOUNTS AVAILABLE

SUPERIOR RECEIVER AND TRANSMITTER SPECIFICALLY DESIGNED FOR REPEATER SERVICE.

ADJUSTABLE TRANSMITTER POWER, FROM 1 TO 25 WATTS MINIMUM OUTPUT WITH EXTREMELY COOL OPERATION. — AUTOMATIC BATTERY BACK UP SYSTEM CAPABILITY WITH BATTERY CHARGING AND REVERSE POLARITY PROTECTION. — NOW WITH A FULL COMPLIMENT OF INDICATORS AND STATUS LIGHTS. — 100% DUTY CYCLE — ADVANCED REPEATER SQUELCH SYSTEM **NO CHOPPING, POPPING, OR ANNOYING REPEATER KEY UPS DURING LIGHTNING STORMS.** — DIE CAST ALUMINUM R.F. ENCLOSURES — SMALL SIZE 5¼ X 19 X 13" — HIGH QUALITY LONG LIFE DESIGN.

Hi Pro RECEIVER AND TRANSMITTER NOW USED IN ALL HI PRO REPEATERS

ALSO AVAILABLE IN KIT FORM

SMALL SIZE
3 7/8 x 6 1/8"
LOW COST

HI PRO TRANSMITTER
DESIGNED FOR REPEATER SERVICE WITH EXCELLENT AUDIO, STABILITY, HARMONIC REJECTION, AND LOW SIDEBAND NOISE.

ADJUSTABLE POWER OUTPUT — UP TO 5 WATTS FROM THE EXCITER BOARD. COOL OPERATION.

HI PRO RECEIVER
THIS RECEIVER IS THE HEART OF THE REPEATER AND BOASTS SUPERIOR SQUELCH ACTION NEEDED FOR THIS TYPE OF SERVICE. EXCELLENT SENSITIVITY, STABILITY AND SELECTIVITY.

USE THIS RECEIVER TO REPLACE THAT TROUBLESOME RECEIVER IN YOUR PRESENT REPEATER. EASILY ADAPTS TO ANY SYSTEM.



SMALL SIZE
3 7/8 x 6 1/8"
LOW COST

THIS EXCITER IS USED TO DRIVE THE HI PRO 25 WATT POWER AMPLIFIER AND BOTH ARE AVAILABLE KIT OR ASSEMBLED.

WRITE FOR COMPLETE SPECIFICATIONS ON OUR FULL LINE OF ACCESSORIES AND LOWER COST HI PRO MK I REPEATERS.

✓46

MAGGIORE ELECTRONIC LAB.

590 SNYDER AVE.
WEST CHESTER, PA. 19380

TELEX:
499-0741-MELCO
PHONE 215-436-6051

✓See List of Advertisers on page 114

TRAC

TRAC*ONE + DELUXE CMOS KEYER

$119.95

Features: **Model TE-464**

*True CW signal reproduction—Single signal reception
*Removes all QRM and QRN
*Digs out CW signal, decodes it with Phased Lock Loop Tone Decoder then reproduces it with full operator control over Gain, Freq, Tone, Delay.
*All controls on front panel
*Freq control variable 300 Hz to 2500 Hz will match any rig.
*LED flashes during decoder operation
*Operates in line with rig audio--leave in line on OFF/BYPASS
*Built in speaker
*Headphones jack rear panel
*Battery or AC-adaptor, 9VDC operation

PLUS:

*Deluxe CMOS Keyer—"State-of-the-art" CMOS circuitry
*Self-completing dots and dashes
*Both dot and dash memory
*Iambic keying with any squeeze paddle
*5-50 w.p.m.
*Speed, Volume, Tone, Tune and Weight controls
*Sidetone and speaker
*Semi-auto switch for bug or straight key
*Deluxe quarter-inch jacks for keying and output
*Keys grid block or solid state rigs

TRAC*ONE CW PROCESSOR

$89.95

Features: **Model TE 424**

*True CW signal reproduction—Single signal reception
*Removes all QRM and QRN
*Digs out CW signal, decodes it with Phased Lock Loop Tone Decoder then reproduces it with full operator control over Gain, Freq, Tone, Delay.
*All controls on front panel
*Freq control variable 300 Hz to 2500 Hz will match any rig.
*LED flashes during decoder operation
*Operates in line with rig audio—leave in line on OFF/BYPASS
*Built-in speaker
*Headphones jack rear panel
*Battery or AC-adaptor, 9 VDC operation

↙76

SEND FOR BROCHURE ON OUR FULL PRODUCT LINE

TRAC ELECTRONICS, INC.
1106 RAND BLDG.
BUFFALO, NY 14203
(716) 852-8188

V-J POWER UP

2 METER 90 WATT OUTPUT AMPLIFIER WITH 18 DB GAIN PREAMP



Model 90PL
FOR ONLY
FACTORY DIRECT

$139.95* PLUS SHIPPING

- **FREQUENCY** range 144 - 148 MHz
- **OPERATION FM or SSB** (completely linear) Class AB1
- **RF DRIVE** 1 to 30 watts
- **KEYING RF** activated with high quality relays
- **SSB** operation built in delay
- **POWER REQUIREMENTS** typical 10 watts drive, 13 amps at 13.8 VDC
- **IDLE** current 20 mills
- **MOBILE or FIXED** operation
- **PREAMP** 18DB gain minimum
- **NOISE FIGURE** less than 1.5 DB
- **PREAMP KEYING** independent — separately RF activated relays
- **CONSTRUCTION** wrap around aluminum heat sink 2 pieces 360 degrees cooling
- **SIZE** 7"(w) x 6"(d) x 3"(h) — **WEIGHT** 3 lbs. 9 ozs.
- **IMMEDIATE SHIPMENT**



POWER CHART

SPECIAL OFFER

Matching Power Supply **$99.95*** PLUS SHIPPING

15 AMP SUPPLY wt. 13 lbs. size 8"(w) x 5"(h) x 6"(d)
IMMEDIATE SHIPMENT
ALL PARTS AND LABOR WARRANTED ONE FULL YEAR

VJ90PL Amplifier $139.95 plus $3.00 shipping
VJ15 POWER Supply $99.95 plus $7.00 shipping
***Prices USA only**

VISA, MASTER CHARGE; M.O. or C.O.D. • PHONE (713) 477-0134

V-J PRODUCTS, INC. 505 East Shaw, Pasadena, Texas 77506

SERVING THE ELECTRONICS INDUSTRY SINCE 1965



NEW . . . $139.95

NEW MORSEMATIC™ MM-2 KEYER

THE MORSEMATIC KEYER BY AEA HAS BEEN PROCLAIMED *BEST* OF ALL PADDLE KEYERS ON THE MARKET

Now you can get all the features of the world's first and still best microcomputerized keyer at a 30% reduction in price. The new model MM-2 has all the outstanding features of the MM-1 predecessor such as dual microcomputers with copywritten software, 500 character soft-partitioned™ memory with editing, exclusive beacon mode, exclusive automatic speed increase trainer mode, and exclusive automatic serial number generator. In addition, the MM-2 comes complete with CMOS memory and provisions for internal memory keep alive battery. The MM-2 operates from external 12 VDC at approximately 350 Ma.

ACCESSORIES:
Model AC-1 600 Ma 12 VDC Wall Adaptor $14.95
Model ME-2 Memory Expansion (2000 Total Morse Characters) $39.95

If you have hesitated buying the best because of price, you need to wait no longer, the best is now available in an improved form at a price you can afford.

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

call or visit:

New Jersey's Largest Ham Store

Radios Unlimited
1760 Easton Avenue
Somerset, N.J. 08873
(201) 469-4599
(800) 526-0903

↙105

AEA
Brings you the Breakthrough!

HAZER

NEW TOWER ACCESSORY

TOO OLD—TOO SCARED—TOO TIRED TO CLIMB?

- RAISE OR LOWER ANTENNA TO GROUND LEVEL
- SIMPLE AND EASY TO INSTALL AND USE
- MADE OF 6061 STRUCTURAL ALUMINUM
- FOR ROHN 20 AND 25 TOWERS
- COMPLETE WITH WINCH, CABLE, HARDWARE & INSTRUCTIONS

$279.95*

816-882-2734

MARTIN ENGINEERING
P.O. BOX 253
BOONVILLE, MO 65233

*PLUS FREIGHT, & TAX. TOWER, ROTATOR, ANT-NOT INCLUDED ↙134

A TRUE STATE-OF-THE-ART COMMUNICATIONS TERMINAL!

NEW M-500 ASR

from
INFO-TECH

$1475.00
(with 12" Monitor)

$180.00
MEMORY EXPANSION BOARD (contains mailbox systems)
(10K of Memory)

For use by amateur radio operators in the transmission and reception of RTTY (ASCII & Baudot) and Morse code. Microprocessor controlled with 20K of memory (8K ROM, 8K RAM, 4K video RAM).

User programmable messages, Sel-Cal, WRU, mailbox, real time clock, large running buffers, buffers for printers, basic word processing for on-screen editing, full and half duplex, cassette tape interface, split screen formats, ASCII or Baudot printer outputs, autostart, push to talk, accessory switches, provisions for battery back-up, many other features.

The M-500 consists of three parts:
1. KEYBOARD. Connected to mainframe by 5-ft. umbilical cord for maximum operating flexibility. Entire system keyboard controlled.
2. MAIN FRAME. Houses 95% of the electronics, all I/O jacks, power supplies, modulator, demodulators. Metal frame cabinet is table top or rack mounted.
3. 12" VIDEO MONITOR. High quality to insure undistorted video, provide flexibility for operating position placement.

Order direct or from these dealers

Caribee
5640 S.W. 116th Ave.
Miami, Florida 33173
(305) 271-3675

Calmay Products
14903 Beachview Ave.
White Rock, B.C., Canada V4B1N8
(604) 536-3058

Dialta Amateur Radio Supply
212 48th St.
Rapid City, South Dakota 57701
(605) 343-6127

Electronic Equipment Bank
516 Mill St.
Vienna, Virginia 22180
(703) 938-3350

Giller Associates, Inc.
52 Park Ave.
Park Ridge, New Jersey 07656
(201) 391-7887

Global Communications
606 Cocoa Isles Blvd.
Cocoa Beach, Florida 32931
(305) 783-3624

Ham Radio Center
8343 Olive Blvd.
St. Louis, Missouri 63132
1-800-325-3636

Memphis Amateur Electronics
1445 Wells Station Rd.
Memphis, Tennessee 38108
1-800-238-6168

Michigan Radio
38270 Mast
Mt. Clemens, Michigan 48045
(313) 469-4656

H & G Distributing
7201 NW 12th St.
Miami, Florida 33126
(305) 592-9685, 763-8170

Radio World
Terminal Building
Oneida County Airport
Oriskany, New York 13424
(315) 736-0470
1-800-448-9338

Ray's Amateur Radio
1590 U.S. Highway 19 South
Clearwater, Florida 33516
(813) 535-1416

Universal Amateur Radio
1280 Aida Dr.
Reynoldsburg, Ohio 43068
(614) 866-4267

INFO-TECH ELECTRONIC EQUIPMENT

Manufactured by:
DIGITAL ELECTRONIC SYSTEMS, INC.
1633 Wisteria Court • Englewood, Florida 33533
813-474-9518

↙35

MFJ KEYERS

Uses Curtis 8044 IC. Iambic operation, dot-dash memories, weight control, solid state keying. RF proof.

$79.95

The MFJ-408 Deluxe Electronic Keyer sends iambic, automatic, semi-automatic, manual. Use squeeze, single lever or straight key.

Speedmeter lets you read speed to 100 WPM.

Socket for external Curtis memory, random code generator, keyboard. Optional cable, $4.95.

Iambic operation with squeeze key. Dot-dash insertion. **Semi-automatic "bug" operation** provides automatic dots and manual dashes.

Dot-dash memory, self-completing dots and dashes, jam-proof spacing, instant start. **RF proof.**

Solid-state keying: grid block, solid state xmtrs.

Front panel controls: linear speed, weight, tone, volume, function switch. 8 to 50 WPM.

Weight control adjusts dot-dash space ratio; makes your signal distinctive to penetrate QRM.

Tone control. Speaker. Ideal for classroom.

Function switch selects off, on, semi-automatic/manual, tune. Tune keys transmitter for tuning.

Uses 4 C-cells. 2.5 mm jack for power (6-9 VDC). Optional AC adapter MFJ-1305, $9.95.

Eggshell white, walnut sides. 8x2x6 inches.

MFJ-406, $69.95, like 408 less speedmeter.

$49.95

New MFJ-401 Econo Keyer II gives you a reliable, full feature economy keyer for squeeze, single lever or straight key.

Has sidetone, speaker, volume, speed, internal weight and tone controls. Sends iambic, automatic, semi-automatic, manual. Tune function. Dot-dash memories. 8-50 WPM. "On" LED. Use 9V battery, 6-9 VDC, or 110 VAC with optional AC adapter, MFJ-1305, $9.95. 4x2x3½".

Reliable solid state keying. Keys virtually all solid state or tube type transmitters.

$64.95

MFJ-405 Econo Keyer II. Same as MFJ-401 but has built-in single paddle with adjustable travel. Also jack for external paddle. 4x2x3½".

Optional: Bencher Iambic Paddle, $42.95; 110VAC adapter, MFJ-1305, $9.95. **Free catalog.**

Order from MFJ and try it. If not delighted, return within 30 days for refund (less shipping).

One year unconditional guarantee.

Order yours today. Call toll free 800-647-1800. Charge VISA, MC. Or mail check, money order. Add $4.00 each for shipping and handling.

CALL TOLL FREE ... 800-647-1800

Call 601-323-5869 for technical information, order/repair status. Also call 601-323-5869 outside continental USA and in Mississippi. ↙47

MFJ ENTERPRISES, INCORPORATED
Box 494, Mississippi State, MS 39762

↙See List of Advertisers on page 114

Crime-Stoppers' Textbook

—rules of thumb for would-be gumshoes

Robert C. Diefenbach
2402 Lauderdale Drive, NE
Atlanta GA 30345

No one seemed to notice the tan car that stopped at the quiet corner only long enough to drop off a tall, casually dressed young man. As the car drove unhurriedly away, the young man began walking past the neatly trimmed yards looking—carefully looking—at each house as he passed. No one seemed to notice.

But the driver of the car with amateur radio tags did notice, and a few minutes later also noticed the same tan car stopped in the shade of a clump of low pine trees in a nearby church parking lot. The car's hood was raised. Its driver, standing in front with one foot resting on the bumper, was making some unseen adjustment to the idling engine. He appeared impatient as he glanced at his wristwatch.

B.M. Gray II.

Driving past the parking lot, the ham noted the dented left front fender on the tan car and the driver's blonde hair and blue football-style jersey. And more. By the time he pulled his car to an easy stop midway down the next block and reached for the microphone clipped to the dashboard, he knew exactly what he would say to the police dispatcher.

It took only moments to place the call through the repeater phone patch.

The dispatcher's voice was crisp. "Police emergency."

"I want to report a suspicious car and persons on Thomason Drive. I suspect they are planning a burglary."

"Stand by."

There was nothing remarkable about this series of transmissions or others like it, heard infrequently on the amateur and business radio bands, except that they are heard *very* infrequently in proportion to the potential criminal activities witnessed by drivers of radio-equipped vehicles. Law-enforcement agencies wish fervently that there were more civilian radio exchanges like this one. They need all the help they can get.

There are only 2.1 full-time law-enforcement officers per 1000 US citizens, according to the latest figures released by the Federal Bureau of Investigation. These men and women do their best in the face of an alarming increase in serious crime, but they are, as a group, vastly overworked. Since 1971, property crimes (burglary, larceny-theft, and motor-vehicle theft) have shot up 54 percent nationally. Violent crimes (murder, forcible rape, and aggravated assault) have risen 60 percent. In just one year, from 1979 to 1980, burglaries and robberies rose 14 and 18 percent, respectively.

As federal, state, and local governments tighten their belts in the current wave of budget and tax revisions, there is not likely to be much—if any—increase in the number of professional crime fighters in most jurisdictions. There is a clear and growing need for appropriately-controlled civilian involvement.

Special Agent Edward J. Tully of the FBI points out that "there has been a tendency for civilians to forget their responsibility for effective law enforcement. Clearly, police departments cannot do the job alone." Tully is acting academic dean of the FBI Institute in Quantico, Virginia, where police officers from cities of all sizes are trained alongside federal and state agents and policemen and -women. "Citizens with access to mobile two-way

radios, or ham radio opertors, can be of significant assistance," he said.

Sanford H. Smith, a leading national figure in public-safety communications, agrees wholeheartedly. "The present trend in our country is towards self-help. Increased citizen involvement in law enforcement is a natural part of that trend." Mr. Smith is Director of Communications for the city of Greensboro, North Carolina, president of the Land Mobile Communications Council, and immediate past-president of the Associated Public Safety Communications Officers, Inc. "When we feel we have done something for our community and our fellow men, there is a huge personal reward," he adds.

When the FBI and any other law-enforcement agency solicit civilian help, they are definitely not suggesting that the civilians "play policeman." That is the very last thing authorities want and is probably the best way a civilian could pick to become a part of the *problem* instead of the *solution*! What is wanted and needed is responsible, reliable observation and reporting of potential or actual criminal activities, and NOT vigilantism or other unauthorized direct involvement.

Professionals in law-enforcement communications—"sworn" officers and civilians alike—agree that radio-equipped volunteer observers' reports are valuable. They stress that these reports are more valuable when the observers have been trained, even minimally, by their local police departments.

The concept is endorsed by The Crime Prevention Coalition, a group of almost 50 prestigious national organizations whose combined efforts are behind the multimillion dollar "Take a Bite Out of Crime" advertising campaign. B.M. Gray II, Director of Crime Prevention, says, "Surveillance by drivers of two-way radio-equipped vehicles could be one of the most useful citizen involvements in preventing crimes, particularly street crimes, from occurring. Drivers whose radios give them the ability to notify and communicate with the police without leaving their vehicles—whether amateur radio hobbyists or commercial drivers—can be a definite asset."

Why the need for training? It sounds simple enough: If you see something unusual or suspicious, call the police. That's the basic idea, all right. But when *is* something unusual or suspicious? *What* should be reported. *How* should it be reported? Police-directed training is the most reliable source for answers specific to each community's needs and resources.

Most police departments are anxious to work with local citizens who express interest in helping them. A letter to the office of the Chief of Police, volunteering to help and asking to be trained, is a good way to start. You might attach a copy of this article as a way of introducing the subject.

The amount of training police departments can provide—from informal advice through classroom presentations—varies widely, depending upon the resources available. Understandably, most departments will devote more attention to training requests that represent bigger potential payoffs—larger numbers of reliable radio-equipped observers on the streets. Several ham radio clubs or repeater groups, or the owners of several smaller firms which operate radio-equipped vehicles, can effectively combine their initial contacts with the police.

Sanford H. Smith.

What Is Unusual or Suspicious?

Deciding what is unusual or suspicious enough to report to the police calls for subjective, case-by-case judgment. It is easy to err in either direction: reporting inconsequential observations or failing to report meaningful ones. Detective Jerry Jaquenta KA4NIA of the Boca Raton, Florida, Police Department burglary squad, voices the opinion of most law-enforcement professionals. "We would far rather get a dozen or more false alarms—calls reporting what turn out to be entirely innocent events—than risk missing the one call that does involve crime. If there is reasonable doubt, *call!*"

Detective Jaquenta lists these examples among observations he thinks should be reported: persons—such as obviously truant students—who are obviously out of place where they are observed, perhaps with a screwdriver or gloves sticking out of a pocket, someone knocking at the front door and moving to the rear of a house when there is no answer, and occupied cars or trucks parked in concealment.

"But don't be guided only by a person's appearance," cautions Sanford Smith. "It is a subject's *actions* that will usually tip off a good observer." Persons who seem to be hiding, or showing nervousness while loitering, are high on Smith's list of significant observations.

"Any sort of violence should be reported quickly," adds David N. Wise N8CNY, veteran chief of the Michigan State Police Department's twenty-

David N. Wise N8CNY.

seven communications dispatching locations. "Whether it is as obviously criminal as a robbery or only potentially so—as in a street-corner shoving match that looks as if it could become a fistfight—let the police know. But," he emphasizes, "do it from a safe distance!" Exposing yourself to danger or violating the law yourself—for example, following a speeding car—isn't just foolhardy. It is dumb!

Police dispatchers, particularly in smaller jurisdictions, soon learn whether regular callers are reliable observers or merely busybodies. If you remember the old tale about crying wolf, you will agree that it is best not to get the latter reputation.

What Should Be Reported?

Public-safety communications expert Sanford Smith lists these four components of an observation report, in the order in which they should be given to a police dispatcher.

- *What is being reported?* Tell the dispatcher immediately. A robbery in progress? A suspicious person or vehicle? An accident? A fire? A potential suicide? Knowing what the basic problem is, the dispatcher can decide what public-safety resources may be needed. Radio operators should know that most police departments would rather get several radio reports of a serious traffic accident than not receive any because each passing radio-equipped observer assumed someone else had reported it.
- *Where is it happening?* Give as accurate a location as possible. Include street names, nearby intersections, building numbers, and easily-recognized landmarks.
- *Who and where are you?* The radio or telephone link between you and the police could somehow be broken. Give the police dispatcher your name, exact location, and a way that he or she can get back in touch with you if you are disconnected. This is especially important in bigger cities where several dispatchers are on duty at a time. Calling back after disconnecting, you may get another dispatcher and have to start your report all over again.

Ham radio operators, and others who can talk to the police directly through repeater phone-patch facilities, are not so easily re-contacted if the patch times out or the connection breaks some other way. Hams should ask for help from another amateur monitoring the frequency from a location with a telephone, and that telephone number should be given to the police dispatcher. If no one else is on frequency, think of some other way the communications link might be re-established if it breaks. Be sure that you and the police department both understand how the re-contact will be made.

If the report is being made through a taxi, delivery service, or other business radio dispatcher, that business dispatcher's phone number should be given to the police dispatcher.

Some law-enforcement agencies will insist on recording your identity—as much to discourage anonymous nuisance calls as to add to their record. Others will ask your name, but treat your report with equal seriousness whether you give it or not. While some radio operators may shrink from getting involved in an incident they observe by identifying themselves, they should realize that by giving their names they are assuring the police that they believe in the accuracy of their report.

- *What are the details?* Your eyes may fool you. Simply being able to see all of the details that occur during an exciting, stressful event can be difficult. Under these circumstances we are all subject to a physical phenomenon called tunnel vision. As we concentrate intently on what is going on in the center of our visual field, we actually lose a great percentage of our peripheral—or side—vision. Being aware that this may happen to you will help you prepare to overcome tunnel vision by making a conscious effort to look *around* the central action for important details.

When describing persons, follow this standard sequence. Leave out any item you do not know.

1. Name
2. Sex
3. Race
4. Age
5. Height
6. Weight
7. Hair
8. Eyes
9. Complexion
10. Physical characteristics: marks, scars, limp, etc.
11. Clothing, from head to foot: hat, shirt, coat, trousers, socks, shoes.

When describing vehicles, start with the color or colors, then give the make, model, and as many give-away markings—accessories, damage, etc.—as you can. The license number or any part of the number can be very helpful to the police. But stolen tags are commonly used by criminals, so an accurate description of the vehicle itself is just as important.

How Should It Be Reported?

To be useful, reports must be made calmly, clearly, and objectively. That may not seem too difficult when you are describ-

Legal Issues In Civilian Surveillance

Does a radio operator step onto dangerous legal ground by making reports to the police? Can he or she be sued for slander? For false arrest? Not if the reports are *accurate*, according to Lewis J. Paper, former Associate Counsel of the Federal Communications Commission, now in private practice in Washington, DC. "It would be difficult," he says, "to conceive a situation where simply reporting—*accurately* reporting—what is observed could expose the observer to any liablility."

Attorney Paper recommends that as soon as possible after making any direct or indirect verbal report to the police, radio-equipped observers should make a personal written record of everything seen and said concerning the event, and then save the record. If made while memory is still fresh, this document can be very helpful later if you are ever called as a witness in any court action that ensues. You can be subpoenaed by either the prosecution or defense. Your record itself will probably never be called into evidence. But if there is—and there frequently is—a long delay between the event and a trial, it will protect you against a lessening or loss of memory that could occur before you are asked to testify.

"Although most states' slander laws vary in detail," says Mr. Paper, "generally a charge of slander must be based on reporting information which the reporter *knows or should have known* was false. A written record—by its very existence—will help minimize any risk that you will be accused of intentionally lying."

Provided you have accurately reported your observations, according to Mr. Paper, you have no liability if the police are charged with false arrest after detaining someone as a result of your report. "In making the arrest the law-enforcement agency assumes the responsibility and any liability for that arrest," he says.

Like every other authority contacted in connection with this article, Mr. Paper quickly and firmly points out that volunteers must remember that they can expose themselves to liability for violations like trespass and assault by acting as if they have powers which, *without specific legal authority*, they don't have! ■

ing a minor auto accident on the freeway. But it *is* difficult when actual crime or violence is concerned. Even police officers have had difficulty making proper radio transmissions under emotionally stressful circumstances. Here are some tips from the experts:

- Think about what you are going to say before you transmit. Even if it means a short delay, compose your message mentally to be sure it is accurate, concise, and in the sequence that will be the most helpful to the police dispatcher.
- Keep your transmissions short. Break frequently to allow the person on the other end to interrupt.
- Control your voice. When excited or upset, many people tend to speak faster and to raise the volume and pitch of their voices. The combination makes for hard-to-copy radio transmissions. Listen to yourself. Keep your voice as close to normal as possible.
- Avoid subjective words. Be specific in describing what you see. The dispatcher doesn't know what you think "a bad fight" is or what "a whole bunch" of injured motorists means.
- Speak plain English! Leave the "ten-this" and "ten-that" and other supposed-to-be police jargon to the TV heros. The few seconds you think you might save by using jargon is not worth the risk of being misunderstood.
- Stay at your radio. Except to render whatever aid you can to an injured person, you can be more helpful by being keeping a communications line open between the police and whatever action you are observing.

Detective Jerry Jaquenta KA4NIA

Don't forget the important don'ts: *Don't* expose yourself to danger! *Don't* play cop! In the process of trying to assist the police, *don't* violate any laws yourself. ■

MOR-GAIN

1/2-size (75M only 66')

Multi-Band (5, 4, 3 bands)
80/75M thru 10M

Broadbanded - no traps used

Prices start at $82.50

MOR-GAIN

THE MOR-GAIN HD DIPOLES are the most advanced, highest performance multi-band HF dipole antennas available. Patented design provides length one-half of conventional dipoles. 50 ohm feed on all bands, no tuner or balun required. Can be installed as inverted VEE. Thousands in use worldwide. 22 models available including two models engineered for optimum performance for the novice bands. The Mor-Gain HD dipoles N/T series are the only commercial antennas specifically designed to meet the operational requirements of the novice license. Our 1-year warranty is backed by nearly 20 years of HD dipole production experience.

For detailed 10-page brochure, write or phone directly to **MOR-GAIN**, P.O. Box 329T, Leavenworth, Ks. 66048, Tel. (913) 682-3142.

MOR-GAIN

SOCIAL EVENTS

Listings in this column are provided free of charge on a space-available basis. The following information should be included in every announcement: sponsor, event, date, time, place, city, state, admission charge (if any), features, talk-in frequencies, and the name of whom to contact for further information. Announcements must be received at 73 Magazine by the first of the month, two months prior to the month in which the event takes place.

SEASIDE OR
JUN 4-6

The North Coast Repeater Association and the Oregon Tualatin Valley Amateur Radio Club will hold their Oregon State Ham Convention on June 4-6, 1982, at the Seaside Convention Center, Seaside OR. Hours are 12:00 noon to 5:00 pm on Friday, 8:00 am to 9:30 pm on Saturday, and 8:00 am to 2:00 pm on Sunday. Registration is $5.00 per single, $7.00 per couple, and $1.00 for children. Seminars will include receiver design, construction, satellite earth stations, contests, and many others. The banquet speaker will be a NASA Space Shuttle astronaut and master of ceremonies will be Mel Ellis K7AOZ, Vice Director, ARRL Northwest Division. The banquet cost is $12.50 per person. Talk-in on 146.52 and 145.45 (−600). For more information, write Doc McLendon W7GWC, PO Box 920, Seaside OR 97132.

SAN DIEGO CA
JUN 4-6

The San Diego County Amateur Radio Council and the San Diego Computer Society will hold Hamcomp 82 on June 4-6, 1982, at the Town & Country Convention Center, San Diego CA. Registration is $7.00 and the Saturday evening banquet featuring speaker Roy Neal K6DUE is $15.00. There will be technical sessions all day Saturday, ham and computer booths, many prizes and awards (including a main prize of an Osborne 1 computer), an ARRL forum, a ladies' luncheon, Sunday morning breakfasts, and ham and computer sessions every hour. The final event on Sunday at 1:00 pm will be a T-hunt on 146.76 MHz. Talk-in on .04/.64, .75/.15, and 222.94/224.54. For registration forms, write Hamcomp 82, PO Box 81537, San Diego CA 92138.

LOVELAND CO
JUN 5

The Northern Colorado Amateur Radio Club will hold its annual Superfest on June 5, 1982, from 8:00 am to 4:30 pm in the McMillen Building at the Larimer County Fairgrounds, Loveland CO. Admission is $3.00 and will include a swap table. There will be exhibits, technical talks, a code contest with prizes, an auction, a swapfest, and drawings for many prizes, including a synthesized 2-meter handheld. Special activities are planned for non-hams, especially the kids. For further information, contact Gene Bellamy WD0DRM, 3124 West 6th Street, Greeley CO 80631.

ST PAUL MN
JUN 5

The North Area Repeater Association will hold a swapfest and exposition for radio amateurs and computer hobbyists on June 5, 1982, at the Minnesota State Fairgrounds, St. Paul MN. Admission is $3.00 and free overnight parking for self-contained campers will be available on June 4th. There will be exhibits, booths, and prizes. Talk-in on .25/.85 and .16/.76. For more information or reservations, write Amateur Fair, PO Box 30054, St. Paul MN 55175.

GRAND RAPIDS MI
JUN 5

The Independent Repeater Association will hold its annual Grand Rapids Festival Swap & Shop on Saturday, June 5, 1982, from 8:00 am to 3:00 pm at the Kentwood Field House, just south of 60th Street on Kalamazoo Avenue. Admission is $3.00; eight-foot tables are $7.00 or $4.00 for half-size. There will be prizes and refreshments. For more information or dealer reservations, write IRA Swap, 562 92nd Street SE, Byron Center MI 49315, or call (616)-455-2926.

GUELPH ONT CAN
JUN 5

The Guelph Amateur Radio Club (VE3ZM) will hold the 7th annual Central Ontario Amateur Radio Flea Market on Saturday, June 5, 1982, from 8:00 am to 4:00 pm at "Regal Hall," 340 Woodlawn Road West, corner of Woodlawn and Hanlon Parkway (Hwy. #6), Guelph ONT. Admission is $2.00 and children 12 years old and under will be admitted free. Vendors' admission is an additional $3.00 and a quantity of 3' x 6' tables are available at $5.00 each. Vendors will be admitted from 6:00 am on. There will be commercial displays, surplus dealers, computer software and hardware, and indoor and outdoor displays. The refreshment concession will open at 12:00 noon. For further information, contact Bob Lacombe VE8IYE at (519)-843-4618 or Rocco Furfaro VE3HGZ at (519)-824-1157.

FAIRBANKS AK
JUN 5

The Arctic Radio Club of Fairbanks AK will hold a hamfest on June 5, 1982, at the Kiwanis AG Hall at the Tanana Valley Fairgrounds. The doors will open at 8:00 am and there will be a $5.00 fee for all sellers. Features will include door prizes, a raffle, a left-footed key for a code contest, and an ole'-fashioned pot luck dinner. The Alaska QSL bureau will be there as well as an ARRL representative. For further information, contact Herb Wails KL7JLF, PO Box 1625, Fairbanks AK 99707.

CHELSEA MI
JUN 6

The Chelsea Swap and Shop will be held on Sunday, June 6, 1982, at the Chelsea Fairgrounds, Chelsea MI. Gates will open for sellers at 5:00 am and for the public from 8:00 am until 2:00 pm. Donation is $2.00 in advance or $2.50 at the gate. Children under 12 and non-ham spouses will be admitted free. Talk-in on 146.520 simplex and 147.855 (Chelsea repeater). For more info, write to William Altenberndt WB8HSN, 3132 Timberline, Jackson MI 49201.

MANASSAS VA
JUN 6

The Ole Virginia Hams Amateur Radio Club, Inc., will hold the eighth annual Manassas Hamfest on Sunday, June 6, 1982, at the Prince William County Fairgrounds, Route 234, Manassas VA. Admission is $4.00 per person; children under 12 will be admitted free. Gates will open at 8:00 am. In addition to the admission fee, there will be a $3.00 fee for tailgating and the flea market spaces. Gates will open at 7:00 am for tailgating setup. Features will include ladies' programs, children's entertainment, CW proficiency awards, QSL bureaus, food and refreshments, and many prizes. Talk-in on 146.37/146.97 (W1CRO) and 146.52. For additional information, write Jim Lascaris WA2QEJ, 11053 Camfield Ct., Manassas VA 22110.

MILTON PA
JUN 6

The 11th annual Milton Amateur Radio Club hamfest will be held on June 6, 1982, from 8:00 am to 5:00 pm, rain or shine, at the Allenwood Firemen's Fairgrounds located on US 15, 4 miles north of Interstate 80. Advance registration is $2.50; at the gate, $3.00; XYLs and children will be admitted free. There will be a flea market, an auction, contests, cash door prizes, and a free portables and mobile FM clinic. An indoor area will be available as well as food and beverages. Talk-in on .37/.97, .025/.625, and .52. For further details, contact Jerry Williamson WA3SXQ, 10 Old Farm Lane, Milton PA 17847, or call (717)-742-3027.

ROME NY
JUN 6

The Rome Radio Club, Inc., will hold the 30th annual Rome Ham Family Day on Sunday, June 6, 1982, at Beck's Grove, Oswego Road, Rome NY. Features will include door prizes, an early brunch, a buffet-style dinner, a flea market, educational and scientific presentations, and overnight parking for campers, as well as fly-in capabilities. Talk-in on .28/.88 and 146.55.

HUMBOLDT TN
JUN 6

The Humboldt Amateur Radio Club will hold its annual hamfest on Sunday, June 6, 1982, at a new location: Bailey Park, North 22nd Avenue, Humboldt TN. Tickets are $2.00 each, with no additional charge for the flea market. There will be prizes, light lunches, and ladies' and children's activities. Talk-in on 146.37/.97. For more information, contact Ed Holmes W4IGW, 501 North 18th Avenue, Humboldt TN 38343.

DEAL NJ
JUN 6

The Fort Monmouth ARC and Haverim will hold the Jersey Shore Hamfest and Electronics Flea Market on June 6, 1982, from 9:00 am to 4:00 pm at the Jewish Community Center, 100 Grand Avenue, Deal NJ. Admission is $3.00 per person; XYLs and children under 12 will be admitted free. Outdoor tailgating is $2.00 per space and indoor space is $5.00 per 8-foot table. Door prizes and refreshments will be available. Talk-in on 147.045 + .6, 146.775 − .6, and 146.52.

MAYVILLE ND
JUN 6

The Goose River Amateur Radio Club will hold its annual hamfest on Sunday, June 6, 1982, at the city park, Mayville ND. In case of inclement weather, the festivities will be held in the Mayville Armory. Registration begins at noon and the charge is $1.00. All registrants will be eligible for the many door prizes. The grand prize is a Heathkit SA2060 Super Tuner. Camping facilities will be available for those who desire to beat the rush. Talk-in on .31/.91. For further information, please contact Mary Carlson, RR 2, Box 47, Hatton ND 58240.

MIDLAND MI
JUN 12

The Central Michigan Amateur Repeater Association will hold its eighth annual hamfest on June 12, 1982, from 8:00 am to 4:00 pm in the "Great Hall" of the Valley Plaza Complex, just off US Rte. 10 in Midland MI. Tickets are $3.00; children under 12 will be admitted free. Talk-in on 146.67/.07 and 146.52. For additional information, contact Carol Hall WD8DQG, 4651 Cardinal Drive, Mt. Pleasant MI 48858, or call (517)-772-0363.

STATEN ISLAND NY
JUN 12

The Staten Island Amateur Radio Association will hold its flea market on June 12, 1982, from 9:00 am to 3:00 pm, at All Saints Episcopal Church, Staten Island NY. To get to the church, take interstate 278 to the Victory Boulevard exit, proceed east on Victory Boulevard for ½ mile to Crystal Avenue, and turn left on Crystal Avenue. There will be no admission charge for buyers, a $3.00 per space charge for sellers (bring your own tables), and a $1.00 charge for electricity. Refreshments will be available. A raffle will be held at 1:00 pm and the winner will have a choice of an Icom IC-4AT or a Bearcat 20/20. Talk-in on 146.52 and 146.28/.88. For additional information, send an SASE to George Rice, Jr. WA2AMJ, 480 Jewett Avenue, Staten Island NY 10302.

TORRINGTON CT
JUN 12

The CQ Amateur Radio Club of Torrington CT will hold a ham radio flea market on June 12, 1982, from 9:00 am to 5:00 pm at the Drop-In Center, East Albert Street, Torrington CT. The admission fee of $2.00 includes a chance for a door prize. A seller's indoor table is $5.00 each and tailgating space is $2.00 each. There will be a raffle featuring a personal microcomputer kit as first prize, a portable radio cassette recorder as second prize, and an MFJ clock as third prize. You need not be present to win. Talk-in on 146.25/.85, 147.84/.24, and 146.52. For tickets, table reservations (before June 8, 1982), or more information, contact Sebastiano Albani KA1FVM, 76 Pythian Avenue, Torrington CT, or call (203)-489-2945; Ron Brook KA1AFN, 213 East Pearl Street, Torrington CT, or call (203)-482-2764; or the CQ Club, PO Box 692, Torrington CT 06790.

GRANITE CITY IL
JUN 13

The 53rd year anniversary celebration and annual hamfest of the Egyptian Radio Club, Inc. (W9AIU), will be held on Sunday, June 13, 1982, at their club grounds near Granite City IL.

QUEENS NY
JUN 13

The Hall of Science Amateur Radio Club will hold its annual indoor/outdoor, rain-or-shine hamfest on Sunday, June 13, 1982, from 9:00 am to 4:00 pm, at the municipal parking lot, 80-25 126th Street (1 block from Queens Boulevard), Kew Gardens, Queens NY. Sellers' donations are $3.00, buyers' donations are $2.00, and XYLs and children will be admitted free. Talk-in on 145.520. For additional information, contact Thomas Doyle KA2DTB, 135-14 125th Street, South Ozone Park, Queens NY 11420, or phone (212)-738-8887.

WILLOW SPRINGS IL
JUN 13

The Six Meter Club of Chicago, Inc., will hold its 25th annual ARRL-affiliated hamfest on Sunday, June 13, 1982, at Santa Fe Park, 91st and Wolf Road, Willow Springs IL (southwest of downtown Chicago). Ad-

SUMMER VACATION SPECIALS

You Can Bank on Us for More Than Just Low Prices.

YAESU

SAVE $186.00 on FT902 DM

HF TRANSCEIVERS

FT-ONE 9 Band xcvr w/FP-107, w/O FM ..$2895.00
FT-107M/DMS 9 Band xcvr, digital.....$1034.00
FT-101ZD MKIII 9 Band xcvr, digital $799.00
FV-101DM Synth., scanning VFO $323.00
FT-902DM 9 Band xcvr, digital $1349.00
YO-901P Monitor scope w/panadapter $469.00
FV-901DM Remote VFO w/memory $373.00
FT-707 8 Band, Mobile xcvr $729.00
FP-707 Power Supply $145.00
FTV-707 Transverter w/o Module.....$116.00
2M Module only $138.00
6M Module only $99.00
70CM Module only $229.00

VHF-UHF TRANSCEIVERS

FT-680R 6M SSB/FM/CW/AM xcvr $468.00
FT-480R 2M SSB/FM/CW xcvr $476.00
FT-780R 70CM All Mode xcvr $699.00

VHF-UHF HAND-HELDS

FT-208R 2.5W 2M FM HT w/TTP $323.00
FT-708R 1W 440 FM HT w/TTP.....$323.00

VHF PORTABLES

FT-690R 6M FM/SSB xcvr. $339.00
FT-290R 2M FM/SSB xcvr $359.00

FULL LINE AVAILABLE ON SALE

All accessories 10% off w/ Radio Purchase

ICOM



HF TRANSCEIVERS

IC-720A Digital HF xcvr, General Coverage Rcvr. All 9 HF Bands, 2VFOs $1199.00
IC-730 Solid State, Digital xcvr, 8 Bands, 2 VFOs, 1 Memory per band.....$729.00
PS-15 Power Supply $135.00
PS-20 Power Supply $199.00
Phone Patch Specify 730 or 720A $125.00
AT-100 100W auto antenna tuner.....$314.00
AT-500 500W auto antenna tuner.....$399.00

VHF-UHF TRANSCEIVERS

IC-290A All Mode 2M xcvr, 2 VFOs 5 Memories, 1/10 Watts, sean **SPECIAL**.....$459.00
IC-25A Compact, 2M xcvr, 2 VFOs, 5 Memories, Scan, 1/25W $314.00
IC-251A 2M All Mode **SUPER SPECIAL**.....$599.00
IC-451A UHF All Mode Base Station.....$799.00
IC-551 6M All Mode Base Station $429.00
IC-490A All-Mode 430 MHz Mobile.....$579.00

HAND-HELD	w/o TTP	w/TTP
IC 2A/2AT 2M, Hand held.....	$216.00	$242.00
IC 3A/3AT 220, Hand held.....	$242.00	$269.00
IC 4A/4AT 440, Hand held.....	$242.00	$269.00

FULL LINE AVAILABLE ON SALE

All accessories 10% off w/ Radio Purchase

THIS MONTH'S SPECIAL

Limited to EEB stock.

YAESU 404A ..... Special $179.00
..... reg $369.00
YAESU 404B "TTP" $199.00
..... reg. $399.00

YAESU

SAVE $70.00 on FRG-7700



SWL DX HEADQUARTERS

Yaesu FRG7700 150 KHz-30 MHz Digital rcvr $479.00
Yaesu MU7700 12 Ch. Memory Unit $135.00
Yaesu FRG-7 .5-29.9 MHz rcvr $289.00
Kenwood R-1000 .15-30 MHz $449.00
Kenwood R-600 .15-30 MHz $359.00
Panasonic RF-3100 .1-30 MHz & FM $289.00
Panasonic RF-2200 MB-SW-FM $159.00
Sony ICF-2001 Digital, Compact $299.00
Sony ICF-6500 (New) Digital $199.00
Palomar Loop Amp./Ant. .....$77.50/$59.95
Info-Tech M200F RTTY-CW/Video out $549.00
McKay Dymek DA-100D Active Ant. $129.00
Kantronic Mini-Reader $249.00
World Radio TV Handbook 1982 .....$16.50

Call or write Today for all your Test Equipment Needs.

TEST EQUIPMENT SPECIALISTS FOR OVER 10 YEARS.

Scopes, Counters, DMM, Generators, Power Supply

HITACHI SCOPES
N.A. SOAR
LEADER
FLUKE
BECKMAN
BIRD ELECTRONIC
B&K DYNASCAN
AMPHENOL
ASTRON

EEB Electronic Equipment Bank

Just 10 miles west of Wash., D.C.

516 Mill Street, N.E.
Vienna, Virginia 22180
(703) 938-3350

Plan a visit next time you're in Washington, D.C.

The Antenna Bank (703) 569-1200

6460H General Green Way
Alexandria, VA 22210

HUSTLER

4BTV 40-10 Mtr. Vertical.....$79.00
5BTV 80-10 Mtr. Vertical.....$100.00
M01/M02 HF Mobile Mast.....$18.00

HF Mobile Resonators. Std. 400W		**SUPER 2KW**
10 or 15m	$9.00	$13.00
20m	$11.00	$16.00
40m	$13.00	$18.00
75 or 80m	$14.00	$29.00

BM-1 Bumper mt. with S.S. Strap.....$13.00
SSM-2 Commercial S.S. Ball.....$14.00
SF-2 5/8 Wave, 2 Meter Antenna.....$9.00
HOT Hustloff Mt. with Swivel ball.....$14.00
G6-144B 2M Colinear, fixed Station, 6db.....$71.00
G7-144 2M Colinear, fixed Station, 7db.....$103.00

ROHN

20G 10 ft. Stacking Section.....$32.00
25G 10 ft. Stacking Section.....$39.50
45G 10 ft. Stacking Section.....$87.50
25AG 2,3 or 4 Top Section.....$52.50
HDBX 48 48 ft. Free Standing Tower.....$320.00
HBX56 56 ft. Free Standing Tower.....$340.00
FK2548 48 ft. 25G Foldover Tower $725.00*
TB3 Thrust Bearing.....$48.00
SB25G Short Base for 25G.....$16.50
BPH25G Hinged Base Plate.....$59.75
AS25G Accessory Shelf.....$9.50
HB25AG 14" House Bracket $14.50
BPC25G Cement Base Plate $32.00
BAS25G Short top section w/acc. shelf....$36.00
M200 16 gauge, 10 ft, 2" O.D. Mast.....$19.50
M200H 1/8" wall, 10 ft. 2" O.D. Mast $36.00

Freight prepaid on Fold-over towers. Prices 10% higher west of Rocky Mts.

Philly Stran Guy Cable in stock - for price and delivery call (703) 569-1200

ORDERS ONLY 800-336-8473

- Shipping charges not included
- Prices subject to change without notice
- Some items limited to stock only
- Limited quantities
- No COD's

HY-GAIN

TH3JRS Jr. Thunderbird, 750W PEP $150.00
HQ-2S Hy-Quad, 2 Element $235.00
TH5DXS Thunderbird, 5 Element $215.00
TH3MK3S Thunderbird, 3 Element.....$195.00
TH2MK3S Thunderbird, 2 Element.....$128.00
TH7DX Thunderbird, 7 Element.....$336.00
392S TH6DXX Conversion Kit to TH7DX..$135.00
105BAS 5 Element 10m "Long-John".....$114.00
155BAS 5 Element 15m "Long-John".....$161.00
205BAS 5 Element 20m "Long-John".....$269.00
14AVQ/WBS 10-40m Vertical.....$49.95
18AVT/WBS 10-80m Vertical.....$87.50
V-2S Colinear Gain Vertical 138-174 MHz ..$33.75
BN-86 Ferrite Balun, 10-80 meters.....$13.00
HDR-300 Deluxe Rotor, Digital Readout...$378.00

SUPER HY-GAIN PACKAGE

SAVE $355.15 Plus FREE DELIVERY*

SALE $1,306.70

HG53SS 52 ft. Self-Supporting Crank-up Tower.....$990.00 Value
HG-COA 3 each Coax arm for Tower Legs .....$36.00 Value
TH5DXS Thunderbird, 5 Element Triband .....$319.95 Value
HAM IV Rotor.....$237.95 Value
HG-10 10 ft. mast 2" O.D. 120 Wall Steel .....$56.00 Value
BN-86 Ferrite Balun .....$18.95 Value

Free delivery offered for shipping points within 48 States. ADDED BONUS: Include M.O. or Certified Ck. with order and receive a Van Gordon PD-8040 Dipole FREE.

NO SUBSTITUTIONS PLEASE. SALE ENDS 4/30/82.

CUSHCRAFT

A3 3 Element Triband Beam $167.00
A4 4 Element Triband Beam $204.00
A743 7 & 10 MHz Add On for A3 .....$55.00
A744 7 & 10 MHz Add On for A4 .....$55.00
AV3 3 Band Vertical 10-20m.....$41.00
AV4 4 Band Vertical 10-40m.....$82.00
AV5 5 Band Vertical 10-80m.....$88.00
R3 14,21,28 MHz Ringo $204.00
32-19 Boomer 19 Element 2m $75.00
214B Jr. Boomer 14 Element 2m $61.00
A147-11 2m 11 Element Antenna $34.00
A147-4 2M 4 Element Antenna $23.00
ARX-2B 134-164 MHz Ringo Ranger II $34.00
A144-10T 145 MHz 10 Element $41.00
A432-20T 432 MHz 20 Element $41.00
A147-MB Twist Mounting Boom & Bracket. $21.00

Full Line Available on Sale Call

MINI-PRODUCTS

HQ-1 Mini-Quad 6/10/15/20m Antenna.....$129.95
B-24 2 Element HF Mini-Beam 6/10/15/20m. $99.00
RK-3 3rd Element Add-on for B-24, Improves 10-20m.....$67.00
C-4 Mini-Vertical 6/10/15/20m $59.00

ROTORS & CABLES

CDE HAM IV Rotor.....$175.00
CDE T2X Rotor.....$244.00
CDE 45 Rotor $92.00
Alliance HD-73 Rotor $92.00
Alliance U100 Rotor $42.00
RG-8/U Foam Coax 95% Shield .....24¢/ft.
RG-213 Coax, Mil. Spec.....28¢/ft.
Mini-8 Coax 95% Shield.....12¢/ft.
Rotor Wire 8 Conductor.....16¢/ft.
4 Conductor.....7.5¢/ft.

vance registration is $2.00; at the gate, $3.00. There will be a large swapper's row, displays, an AFMARS meeting, refreshments, plenty of parking space, picnic grounds, and prizes, including a first prize of a color TV. Talk-in on 146.52 or .37/.97 K9ONA/R. For advance tickets, contact Val Hellwig K9ZWV, 3420 South 60th Court, Cicero IL 60650.

SANTA MARIA CA
JUN 13

The Satellite Amateur Radio Club will hold its annual bar-b-q/swapfest on June 13, 1982, at the Union Oil picnic grounds, just south of Santa Maria CA. Admission is free for the swapfest; dinner tickets are $7.50 for adults and $3.50 for children 6 to 12 years of age; prize tickets are $1.00 each. Swap tables are $2.50 for each area. There will be prizes, contests, and a Santa-Maria-style bar-b-q. Talk-in on 146.34/.94. For tickets or more information, write Santa Maria Swapfest, PO Box 2616, Orcutt CA 93455.

BELLEFOUNTAINE OH
JUN 13

The Champaign Logan Amateur Radio Club, Inc., annual hamfest and flea market will be held on Sunday, June 13, 1982, at the Logan County Fairgrounds, Bellefountaine OH. Tickets are $1.50 in advance and $2.00 at the door. Tables are $3.00 in advance. Gates will open at 7:00 am and prize drawings will be held every hour starting at 9:00 am. The major prizes of $200, $100, and $50 will be drawn at 3:00 pm; you need not be present to win. Talk-in on 147.60/.00 W8EBG/R. For more information, tickets, or tables, contact M. A. (Bud) Griswold W8JXM, PO Box 301, Urbana OH 43078.

HUNTINGTON WV
JUN 13

The Tri-State Amateur Radio Association will hold its 20th annual Huntington Hamfest on Sunday, June 13, 1982, from 9:00 am to 3:00 pm at Camden Park, off Route 60 West, Huntington WV. Registration is $3.00 per person and children under 12 will be admitted free, Spaces are $3.00 each for the flea market and 6-foot commercial dealers' tables are $5.00 each. Setup time is 6:00 am to 9:00 am. Overnight space will be available for self-contained RVs. Talk-in on 146.04/.64 and 146.52/.52. For further information, send an SASE to TARA, Inc., PO Box 4100, Huntington WV 25729.

SAGINAW MI
JUN 13

The Saginaw Valley Amateur Radio Association will hold its new Electronic Hobby Expo on Sunday, June 13, 1982, at Bridgeport High School, off I-75, exit 144 west. Doors will open at 8:00 am. Adults' tickets are $1.00; kids will be admitted free. Trunk sales are $2.00 and all tables are $5.00. Features will include displays and demonstrations for the whole family, major prizes totaling $400.00, and hourly drawings. Talk-in on 147.24 and 146.52 (K8DAC). For more information, table reservations, or tickets, send an SASE to SVARA/EHE-82, 50 Durand Court, Saginaw MI 48602.

MONROE MI
JUN 13

The annual Monroe County Radio Communications Hamfest will be held on June 13, 1982, from 8:00 am to 3:00 pm at the Monroe Community College, Raisinville Road, Monroe MI. Tickets are $2.00 at the gate, $1.50 in advance, and XYLs and children will be admitted free. Plenty of table space and free parking will be available. Featured will be contests, auctions, and displays. Talk-in on 146.13/.73 and .52. For additional information, contact Fred Lux WD8ITZ, PO Box 982, Monroe MI 48161, or call (313)-243-1088.

AKRON OH
JUN 13

The 15th annual Goodyear ARC Hamfest will be held on Sunday, June 13, 1982, from 10:00 am to 5:00 pm at Goodyear Wingfoot Lake Park, near SR224 and 43, east of Akron OH. Family admission is $2.50 in advance and $3.00 at the gate. Flea market spaces outside are $1.00 and dealers' tables inside the shelter are $5.00 (advance reservations are suggested). There will be picnic tables, a concession stand, and free parking available. Prize drawings will be held throughout the day with grand prize drawings at 4:00 pm. Talk-in on 146.04/.64. For further information, advance sales tickets, and shelter house reservations, send an SASE to Don Rogers WA8SXJ, 161 S. Hawkins Avenue, Akron OH 44313.

PHILADELPHIA PA
JUN 14

The Phil-Mont Mobile Radio Club will host the amateur radio segment of the International Conference on Communications on Monday, June 14, 1982, from 7:00 pm to 10:00 pm, at the Franklin Plaza Hotel, 17th and Race Streets, Philadelphia PA. The session is free and all radio amateurs are invited to attend. For additional information, contact Jacob S. Kovalchek, Jr. AK2I, 1228 Heartwood Drive, Cherry Hill NJ 08003, or phone (603)-428-5924.

DUNELLEN NJ
JUN 19

The Raritan Valley Radio Club will hold its 11th annual hamfest and flea market on June 19, 1982, from 8:30 am to 4:00 pm at Columbia Park, Dunellen NJ. There will be door prizes and a snack bar. Admission is $3.00 for sellers and $2.00 for lookers. Talk-in on 146.625/.025 (W2QW) and 146.52 direct. For further information, call Bob KB2EF at (201)-369-7038.

PAYETTE ID
JUN 19-20

The Voice of Idaho Amateur Radio Club and the Treasure Valley Radio Association will hold the fifth annual Treasure Valley Hamfest on June 19-20, 1982, from 9:00 am Saturday to 3:00 pm Sunday at the Mini-dome, Payette ID. Registration includes breakfast, dinner, and prize tickets, and is $15.00 in advance and $20.00 at the door. Features will include swap tables, dealers, transmitter hunts, special activities for ladies and children, games, contests, prizes, a cocktail party on Sunday, a picnic and banquet on Saturday, and a breakfast on Sunday. Talk-in on 147.84/.24 (WB7NSE/R), 147.72/.12 (K7OJI/R), and 146.52. For more information, contact Samuel K. Sower N7DOV, 1909 Grant Street, Caldwell ID 83605, or phone (208)-459-8132.

MOORHEAD MN
JUN 19-20

The ACE Radio Club will hold its first radio and computer flea market on June 19-20, 1982, beginning at 8:00 am at the Moorhead Centennial Arena, Moorhead MN. Talk-in on 146.970. For complete detailed information, send an SASE to ACE, PO Box 452, Moorhead MN 56560.

LANCASTER OH
JUN 20

The Lancaster and Fairfield County Amateur Radio Club will hold its annual Lancaster Hamfest on June 20, 1982, from 9:00 am to 5:00 pm at the Fairfield County Fairgrounds, Lancaster OH. Tickets are $2.00 in advance or $3.00 at the door. Flea-market tables will be available or bring your own. There will be hourly drawings, refreshments, and plenty of free parking. Talk-in on 147.03/.63 or 146.52. For additional information or advance tickets, write Box 3, Lancaster OH 43130.

CROWN POINT IN
JUN 20

The Lake County Amateur Radio Club will hold its 10th annual Dad's Day Hamfest on June 20, 1982, at the Industrial Arts Building at the Lake County Fairgrounds, Crown Point IN. Prizes will be featured and all events will be held indoors. Tickets are $2.50. Talk-in on 147.84/.24 or .52. For advance tickets, mail check to Lake County ARC, c/o Walley Kozol KA9FDC, 624 N. Rensselaer Street, Griffith IN 46319.

MILWAUKEE WI
JUL 8-11

The YL International Single Sideband-er's (YLISSB) 1982 Convention will be held on July 8-11, 1982, in Milwaukee WI. Activities will include the DX Roundup, the Systems Awards Banquet on Saturday night, and a major door prize of an Icom IC-2AT. Jean Chittenden WA2BGE will tell about her recent China trip. Pre-convention activities will begin July 5, 1982, with golfing, fishing, and side trips planned. Detailed information may be obtained by sending an SASE (business size) to Sus Musachi KB9OC, PO Box 18123, Milwaukee WI 53218.

STATE COLLEGE PA
JUL 10

The Nittany Amateur Radio Club Ham Festival will be held on July 10, 1982, from 8:00 am to 4:00 pm, at the HRB-Singer picnic grounds, Science Park Road (between US 322 West and Rte. 26 East), State College PA. Talk-in on 146.16/.76, 146.25/.85, and 146.52. Features will include a flea market, technical sessions, numerous prizes and contests, and refreshments. Tickets are $3.00; tailgating and tables are $5.00. For more information, contact Richard L. Sine KB3WN 1600 E. Branch Road, State College PA 16801.

OAK CREEK WI
JULY 10

The South Milwaukee Amateur Radio Club will hold its annual swapfest on Saturday, July 10, 1982, from 7:00 am to 5:00 pm at the American Legion Post 434, 9327 South Shepard Avenue, Oak Creek WI. Admission is $2.00 and includes a happy hour with free beverages. Prizes include a $100 first prize and a $50 second prize plus a variety of other prizes to be awarded during the day. Parking, a picnic area, hot and cold sandwiches, liquid refreshments, and overnight camping will be available. Talk-in on 146.94. More details, including a map, may be obtained from the South Milwaukee Amateur Radio Club, PO Box 102, South Milwaukee WI 53172.

MILTON ONT CAN
JUL 10

The Burlington Amateur Radio Club will hold the 8th annual Ontario Hamfest on Saturday, July 10, 1982, at the Milton Fairgrounds, Milton, Ontario. Admission is $3.00 per person or $2.00 for pre-registration. There will be a flea market, displays, an auction, contests, and prizes. Camping will be available and grounds will open Friday night for early campers. For pre-registration, contact Mike Cobb VE3MWR, PO Box 836, Burlington L7R 3Y7, Canada.

BOISSEVAIN MAN CAN
JUL 10-11

The 19th annual International Hamfest will be held on July 10-11, 1982, on the Canadian side of the International Peace Gardens between Dunseith ND and Boissevain MAN in the Canadian Pavilion. Activities will include transmitter hunts, mobile judging, CW and QLF contests, seminars for OMs and YLs, flea markets, a ham auction, a Saturday night dance, a Sunday morning breakfast, and lots of great prizes. For more information, contact Bernie Arcand WD0MD, PO Box 53, Epping ND 58843, or William M. Shryock, Jr. WD0GRC, 322 East 4th Street, Williston ND 58801.

RAPID CITY SD
JUL 10-11

The Black Hills ARC will hold the annual South Dakota Hamfest on July 10-11, 1982, at the Surbeck Center, SD School of Mines and Technology, Rapid City SD. Pre-registration is $7.00; registration at the door is $8.00. There will be a prize drawing for pre-registrants, forums, contests, a picnic, and prizes. Tables are free for the flea market. Talk-in on .34/.94 (W0BLK). For further information, write Black Hills ARC, c/o Rudy WB0PWA, 4822 Capitol, Rapid City SD 57701.

MAPLE RIDGE BC CAN
JUL 10-11

The Maple Ridge ARC will hold its Hamfest '82 on July 10-11, 1982, at the Maple Ridge Fairgrounds, located 30 miles east of Vancouver, Maple Ridge BC. Registration for hams is $5.00; for non-hams over 12 years old, $2.00. There will be food, prizes, a swap & shop, displays, a bunny hunt, ladies' and children's programs, and a main prize drawing for a Kenwood TR-2500. Camper spaces will be available (some with electrical hookups). Talk-in on 146.20/.80. For more information and registration, contact Maple Ridge ARC, Box 292, Maple Ridge BC V2X 7G2.

INDIANAPOLIS IN
JULY 11

The Indiana State Amateur Radio Convention, in conjunction with the Indianapolis Hamfest and Computer Show, will be held on Sunday, July 11, 1982, at the Marion County Fairgrounds at the southeastern intersection of I-74 and I-465. Gate tickets are $4.00 and entitle you to all activities, including the major prize drawing and hourly prizes. There will be inside and outside flea markets, a separate computer show and flea market, a commercial vendors' display area, technical forums, club activities, and ladies' programs. There will be setups after 12:00 noon on Saturday, July 10th. Security will be provided Saturday night and Sunday, and camper hookup facilities will be available on the grounds. For further information, contact Indianapolis Hamfest, Box 11086, Indianapolis IN 46201.

ALEXANDER NY
JUL 11

The Genesee Radio Amateurs, Inc., will hold the second annual ARRL-approved Batavia Hamfest on Sunday, July 11, 1982, from 7:00 am to 5:00 pm at Alexander Firemen's Grounds, Rte. 98 (nine miles south of Batavia), Alexander NY. Registration is $2.00 in advance, $3.00 at the gate, and $1.00 for the flea market. There will be many prizes, a large exhibit area, OM and YL programs, contests, plenty of food, overnight camping, and a boat anchor auction at 3:00 pm. Talk-in on 4.71/5.31 (W2RCX) or .52. For advance tickets, make

Call AES® for Low Prices on DRAKE Equipment

TR-7A 160m Xcvr/SW Rcvr/NB/500Hz ... $1699.00
PS-7 25A continuous duty power supply 299.00
PS-75 15A power supply, 25A surge 199.00
RV-7 Remote VFO..... 195.00
RVM-75 Remote VFO ..... TBA
MMK-7 Mobile mounting kit 79.00

R-7A 0-30 MHz dig. Rcvr/NB/500 Hz filter $1649.00

Accessories:
MS-7 Speaker..... $39.00
FA-7 Cooling fan 29.00
AUX-7 Range program board..... 45.00
RRM-7 Range receive module.....8.50
RTM-7 Range transceive module 8.50
WARC-7 WARC band kit (3-RTM's) 24.95
SL-300 300 Hz CW filter..... 59.95
SL-500 500 Hz CW filter..... 59.95
SL-1000 1 Khz RTTY filter, R-7A 59.95
SL-1800 1.8 KHz SSB/RTTY filter..... 59.95
SL-4000 4 kHz AM filter 59.95
SL-6000 6 KHz AM filter..... 59.95
1548 R-7A/TR-7A cable interface kit 29.50
7037 Extender card service kit 50.00
Service manuals ..... ea. 35.00
1982 World Radio/TV Handbook 16.50

L-7 2kw PEP linear w/tubes..... $1400.00

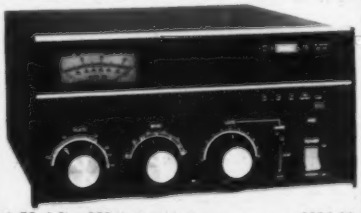

L-75 1.2kw PEP linear w/tube..... $854.95

MN-75 200w, 160-10m antenna tuner..... $259.00

MN-2700 1 kw, 160-10m antenna tuner $349.00
B-1000 4:1 balun-MN-75/MN-2700 .....29.95

The prices shown in this ad are suggested by the Manufacturer.
On most MAJOR items you can Save Money with a Big AES® Discount. Don't wait! - Call us TOLL FREE and get your price.



CS-7 1533 Remote antenna switch 169.00
1534 Control console only for CS-7 ..... 102.00
1535 Remote switch only for CS-7 ..... 67.00
AK-75 Multiband antenna 39.95
AA-75 Antenna insulator kit.....3.49

WH-7

P-75

CW-75

SP-75

P-75 Phone Patch 79.95
LA-7 600 ohm balanced line amplifier..... 49.95
CW-75 Electronic keyer..... 79.95
SP-75 Speech processor..... 159.00
WH-7 160-10m 20/200/2kw wattmeter 129.00
7073 Hand microphone w/plug 29.95
7077 Desk microphone w/plug 49.00

DL-300



TV-3300LP

TV-300HP

Dummy loads:
DL-300 300w dry dummy load $26.95
DL-1000 1kw dry dummy load 59.95
FA-7 Cooling fan for DL-1000 ..... 29.00
Equipment protectors:
1549 200w antenna surge shunt $24.95
3001 Replacement "pill" element 5.00
RP-700 Receiver front-end protector 90.00
TVI Filters:
TV-42-LP 100w 80-10m low-pass filter $14.95
TV-3300-LP 1kw 80-10m low-pass filt 29.95
TV-300-HP 300 ohm high-pass filter 14.95
TV-75-HP 75 ohm high-pass filter 17.95
Line Filters:
LF-2 2-outlet AC line filter $39.95
LF-6 6-outlet AC line filter 59.95
DMM Auto scale digital multimeter 95.95

ESR-24 Earth station receiver $745.00
SC/ESR Single conversion down converter 250.00
SPH-24 Splash proof housing.....60.00

Buy with Confidence .....

AES has Over 24 years of Experience in Mail Order

MasterCard VISA®

Use your CREDIT CARD!

E-X-P-A-N-D-E-D WATS PHONE HOURS
Our Milwaukee Headquarters will answer the Nationwide WATS line **1-800-558-0411** until 8 pm (Milwaukee time) Monday thru Thursday.

Please use WATS line for Placing Orders
For other information, etc. please use Regular line

HOURS: Mon, Tue, Wed & Fri 9-5:30; Thurs* 9-8; Sat 9-3
*Las Vegas & Florida stores NOT open Thursday evenings

Call Toll Free: 1-800-558-0411

In Wisconsin (outside Milwaukee Metro Area) 1-800-242-5195

AMATEUR ELECTRONIC SUPPLY® Inc.

4828 W. Fond du Lac Avenue; Milwaukee, WI 53216 - Phone (414) 442-4200

AES BRANCH STORES — Associate Store

WICKLIFFE, Ohio 44092
28940 Euclid Avenue
Phone (216) 585-7388
Ohio WATS 1-800-362-0290
Outside Ohio 1-800-321-3594

ORLANDO, Fla. 32803
621 Commonwealth Ave.
Phone (305) 894-3238
Fla. WATS 1-800-432-9424
Outside Fla. 1-800-327-1917

CLEARWATER, Fla. 33515
1898 Drew Street
Phone (813) 461-4267
No In-State WATS
No Nationwide WATS

LAS VEGAS, Nev. 89106
1072 N. Rancho Drive
Phone (702) 647-3114
No In-State WATS
Outside Nev. 1-800-634-6227

CHICAGO, Illinois 60630
ERICKSON COMMUNICATIONS
5456 N. Milwaukee Avenue
Phone (312) 631-5181
Outside ILL. 1-800-621-5802

checks payable to Batavia Hamfest, c/o Gram, Inc., Box 572, Batavia NY 14020.

HARBOR SPRINGS MI
JUL 17

The Straits Area Amateur Radio Club will hold its annual hamfest on July 17, 1982, from 9:00 am to 4:00 pm at the Harbor Springs High School, Harbor Springs MI. Donations are $2.00 at the door and table space is $2.50. Doors will be open at 8:00 am for setups. Lunch will be served from 11:00 am to 1:00 pm and refreshments will be available during the day. There will be one main door prize and smaller prizes will be awarded hourly. The school parking lot is free for self-contained RVs to use for an overnight stay and many places of interest to YLs are available nearby. Talk-in on .52/.52 and 146.07/.67. For more details, contact Mr. Bernie Slotnick KB8RE, 630 Ann Street, Harbor Springs MI 49740, or call (616)-526-5614.

EUGENE OR
JUL 17-18

The Lane County Ham Fair will be held on July 17-18, 1982, at the Oregon National Guard Armory, 2515 Centennial, Eugene OR. Tickets are $4.00 each and entitle the holder to one extra drawing ticket free if purchased before July 1st. Doors will open at 8:00 am Saturday and Sunday. Features will include a swap and shop at $5.00 a table, a 2-meter bunny hunt, women's activities, a children's corner, computer demos, technical seminars, QCWA, and a grand prize of an Icom 730 low-band mobile rig. There will be an all-day snack bar, free parking for RVs (no hookups), and a Saturday potluck supper at 6:00 pm. Talk-in on .52/.52, 146.28/.88, 147.86/.26, and 3.910 HF. For advance tickets, send an SASE to Eunice Brown WA7MOK, 2456 Corral Court, Springfield OR 97477, or phone (503)-747-7939.

WASHINGTON MO
JUL 18

The Zero Beaters Amateur Radio Club will hold its hamfest on Sunday, July 18, 1982, at the Washington Fairgrounds, Washington MO. Talk-in on 147.84/.24. For more information, contact Rich Noelke WA6NUI, Rte. 3, 10 Richard Drive, Washington MO 63090.

BOWLING GREEN
JUL 18

The 17th annual Wood County Ham-A-Rama will be held on Sunday, July 18, 1982, at the Wood County Fairgrounds, Bowling Green OH. Gates will open at 10 am, with free admission and parking. There will be drawings for prizes: tickets are $1.50 in advance and $2.00 at the gate. Trunk sales space and food will be available. Advance table rentals are $3.00 to dealers only. Saturday setup available until 8:00 pm. K8TIH talk-in on .52. For more info or dealer rentals, send an SASE to Wood County ARC, c/o S. Irons, PO Box 73, Luckey OH 43443.

CANTON OH
JUL 18

The Tusco Radio Club (W8ZX) and the Canton Amateur Radio Club (W8AL) will hold the 8th annual Hall of Fame Hamfest on July 18, 1982, at the Nimishillen Grange, 6461 Easton Street, Louisville OH. Admission is $2.50 in advance, $3.00 at the gate, and children under 16 will be admitted free. The flea market will open at 9:00 am and activities will include awards, forums, dealers, and XYL programs. Talk-in on 146.19/.79, 146.52/.52, and 147.72/.12. For reservations and/or information, contact Butch Lebold WA8SHP, 10877 Hazelview Avenue, Alliance OH 44601, or phone (216)-821-8794.

GRAND RAPIDS MN
JUL 18

The Range Wide Hamfest will be held on July 18, 1982, from 10:00 am to 4:00 pm at Gunn Park, Highway 38, 6 miles north of Grand Rapids MN. Admission and tables are free. Bring the family for a picnic, games, prizes, and fun. Parking and campgrounds will be available. Talk-in on 146.28/.88 and .52. For more information, write Bob WD0AAF, 736 Crystal Springs Road, Grand Rapids MN 55744, or call (218)-326-2268 (evenings).

POUGHKEEPSIE NY
JUL 24

The Mt. Beacon Amateur Radio Club will hold its annual hamfest on July 24, 1982, beginning at 8:00 am, at the Arlington Senior High School, Poughkeepsie NY. Admission is $2.00 (XYLs and children admitted free), tailgating space is $3.00 (includes 1 free admission), and a table space is $4.00 (includes 1 free table and admission). There will be the free flea market tables indoors, parking door prizes, an auction starting at 2:00 pm, and hot food and beverages. Talk-in on 146.37/.97 and 146.52. For additional information, advance tickets, or registration, send an SASE to Walt Cotter WA2ZCN, North Hillside Lake Road, Wappingers Falls NY 12590, or phone (914)-226-6636.

WEST FRIENDSHIP MD
JUL 25

The Baltimore Radio Amateur Television Society (BRATS) will hold its annual BRATS Maryland Hamfest on Sunday, July 25, 1982, at the Howard County Fairgrounds, Route 144 at Route 32, adjacent to Interstate 70, about 15 miles west of Baltimore, in West Friendship MD. Indoor tables with ac power are $15.00 each; without ac power, $10.00 each. Indoor tailgating is $5.00 per space; outdoor tailgating is $3.00 per space. Overnight RV hookups will be available. For more information and reservations, write to BRATS, PO Box 5915, Baltimore MD 21208.

CENTREVILLE MI
JUL 25

The Amateur Radio Public Service Association of St. Joseph County MI will hold its 4th annual swap and shop on July 25, 1982, at the St. Joseph County Fairgrounds, Centreville MI. Doors open at 8:00 am. Tickets are $2.00 in advance and $3.00 at the gate. Indoor tables are $2.00. Trunk sales are free. Camping is available Saturday night only for $6.00. Talk-in on 146.52. For more information, contact Dennis Cutler N8DDU, 3051 Z Avenue, Vickesburg MI 49097.

WHEELING WV
JUL 25

The Triple States Radio Amateur Club will hold its 4th annual hamfest on Sunday, July 25, 1982, from 9:00 am to 4:00 pm, at Wheeling Park, Wheeling WV. Admission is $2.00 (50/50); children under 12 will be admitted free. There will be major prizes plus door prizes every 15 minutes; a 15-minute auction every hour on the hour; free parking for 1,000 cars; refreshments; ARRL/SWOT/TSRAC booths; indoor dealer displays; and a flea market. There will be setups the night before or at 7:00 am Sunday morning. Talk-in on 146.31/.91 and 146.52. For advance dealer registration, electrical outlet and table requests, submission of free ads for the club's hamfest issue, and more information, contact TSRAC, Box 240, RD 2, Adena OH 43901.

PITTSBURGH PA
AUG 1

The 45th annual South Hills Brass Pounders and Modulators Hamfest will be held on August 1, 1982, from 10:00 am to 4:00 pm, at South Campus, Community College of Allegheny County, Pittsburgh PA. Admission is $2.00 or 3 for $5.00. There will be computer, OSCAR, and ATV demonstrations, as well as a flea market. Talk-in on 146.13/.73 and 146.52. For further information, contact Andrew L. Pato WA3PBD, 1433 Schauffler Drive, West Homestead PA 15120.

ANGOLA IN
AUG 1

The Steuben County Radio Amateurs will hold the 24th annual FM Picnic and Hamfest on Sunday, August 1, 1982, at Crooked Lake, Angola IN. Admission is $2.50. There will be prizes, picnic-style BBQ chicken, inside tables for exhibitors and vendors, and overnight camping. (A fee will be charged by county park.) Talk-in on 146.52 and 147.81/.21.

SAUK RAPIDS MN
AUG 8

The St. Cloud Radio Club will hold its annual hamfest on Sunday, August 8, 1982, from 8:30 am to 4:00 pm, at the Sauk Rapids Municipal Park, Sauk Rapids MN. Talk-in on 146.34/.94. For more information, contact Mike Lynch, 2115-1st Street, St. Cloud MN 56301, or call (612)-251-2297.

TACOMA WA
AUG 14-15

The Radio Club of Tacoma will hold Hamfair 82 on August 14-15, 1982, at the Pacific Lutheran University campus, Tacoma WA. Registration is $5.00 and dinner is $7.50. Activities will include technical seminars, a flea market, commercial booths, an ARRL meeting, a repeater forum, a VHF tweak and tune clinic, prizes, raffles, and a loggers' breakfast. Talk-in on 147.88/.28. For more information, contact Grace Teitzel AD7S, 701 So. 120th, Tacoma WA 98444, or phone (206)-564-8347.

TIOGA COUNTY PA
AUG 21

The Tioga County PA ARC 6th Annual Amateur Radio Hamfest will be held on Saturday, August 21, 1982, from 0800 to 1600 at a new location at Island Park, just off US Rte. 15, Blossburg PA. There will be a flea market, food, free camping, an auction, an H/T door prize, etc. Talk-in on .19/.79 and .52. For more information or advance tickets, write Tioga Co. ARC, PO Box 56, Mansfield PA 16933, or contact Paul Sando KC2AZ, 606 Reynolds Street, Elmira NY 14904 on .19/.79 or .96/.36.

MARYSVILLE OH
AUG 21-22

The Union County Amateur Radio Club will hold the Marysville Hamfest on Saturday afternoon and all day Sunday, August 21-22, 1982, at the fairground in Marysville (near Columbus) OH. Admission is $2.00 in advance or $3.00 at the gate. Flea market space is $1.00. Food, beverages, and free overnight camping, movies, and popcorn will be available. Featured on Saturday night will be a free square dance (with a live band) followed by a big country breakfast available all night. Door prizes, ladies' programs, and ARRL, FCC, and MARS meetings will be featured on Sunday. Talk-in on 146.52 and 147.99/.39. For additional information, write UCARC, 13613 US 36, Marysville OH 43040, or call (513)-644-0468.

AUGUSTA ME
SEP 10-12

The Augusta Emergency Amateur Radio Unit will hold the ARRL-approved Northeast Area Hamfest on September 10-12, 1982, at Windsor Fairgrounds, located just off Route 17, 10 miles east of Augusta ME. Facilities for campers will be available. Activities will include a flea market and regularly scheduled speakers and demonstrations, as well as the usual events. Talk-in on 146.22/.82 and 3940.

ADRIAN MI
SEP 26

The Adrian Amateur Radio Club will hold its 10th annual hamfest on Sunday, September 26, 1982, at the Lenawee County Fairgrounds, Adrian MI. Talk-in on 146.31/.91 (W8TQE). For tickets, tables, and more information, contact the Adrian Amateur Radio Club, Inc., PO Box 26, Adrian MI 49221.

NEW LONDON NH
SEP 26

The 6th annual Connecticut Valley FM Association Hamfest/Flea Market will be held on Sunday, September 26, 1982, from 9:00 am to 5:00 pm, at King Ridge Ski Area, New London NH. Adult admissions are $2.00, a flea-market setup is $5.00, and children under 16 will be admitted free. King Ridge will have the food concession. For more information, contact Francis Callahan KA1BWE, Box 173, East Wallingford VT 05742.

CHICAGO IL
OCT 17

The Chicago Citizens Radio League will hold its first annual hamfest on October 17, 1982, at the North Shore American Legion Post, 6040 N. Clark, Chicago IL from 7:00 am to 4:00 pm. Due to limited table space, table reservations must be made in writing to Fred Mariette KA9FUO 1851 W. Chase, Chicago IL 60626.

HAM HELP

I would appreciate hearing from anyone who has made *any* modification to the Kenwood TR-7500 2-meter FM transceiver.

R. L. Rabenstein WB3JJG
2904 W. Pine Avenue
Altoona PA 16601

I am looking for information regarding the serial numbers on Vibroplex units and the year of their manufacture.

Richard Randall K6ARE
1263 Lakehurst Rd.
Livermore CA 94550

AZDEN ★ NEW! ★ AZDEN ★ NEW! ★ AZDEN ★ NEW! ★ AZDEN

THE GIANT AZDEN® COMPANY

REVOLUTIONIZES THE STATE OF THE ART

AWE AND AZDEN INTRODUCE THE BRILLIANT NEW PCS-2800

MICROCOMPUTER CONTROLLED

SUPERIOR COMMERCIAL GRADE

10 METER

FM TRANSCEIVER

$299.00

master charge

VISA

COMPARE THESE FEATURES WITH ANY UNIT AT ANY PRICE

- **FREQUENCY RANGE:** Receive and transmit: 28.000 to 29.995 MHz, 10KHz steps with built-in – 100 KHz repeater offset.
- **ALL SOLID STATE-CMOS PL DIGITAL SYNTHESIZED.**
- **SIZE:** UNBELIEVABLE! **ONLY** 6 3/4" x 2 3/8" x 9 3/4" **COMPARE!**
- **MICROCOMPUTER CONTROLLED:** All scanning and frequency-control functions are performed by microcomputer.
- **DETACHABLE HEAD:** The control head may be separated from the radio for use in limited spaces and for security purposes.
- **SIX-CHANNEL MEMORY:** Each memory is re-programmable. Memory is retained even when the unit is turned off.
- **MEMORY SCAN:** The six channels may be scanned in either the "busy" or "vacant" modes for quick, easy location of an occupied or unoccupied frequency. AUTO RESUME. **COMPARE!**
- **FULL-BAND SCAN:** All channels may be scanned in either "busy" or "vacant" mode. This is especially useful for locating repeater frequencies in an unfamiliar area. AUTO RESUME. **COMPARE!**
- **INSTANT MEMORY-1 RECALL:** By pressing a button on the microphone or front panel, memory channel 1 may be recalled for immediate use.
- **MIC-CONTROLLED VOLUME AND SQUELCH:** Volume and squelch can be adjusted from the microphone for convenience in mobile operation.
- **DIRECT FREQUENCY READOUT:** LED display shows operating frequency, **NOT** channel number. **COMPARE!**
- **TEN (10) WATTS OUTPUT:** Also 1 watt low power for shorter distance communications. LED readout displays power selection when transmitting.
- **DIGITAL S/RF METER:** LEDs indicate signal strength and power output. No more mechanical meter movements to fall apart!
- **LARGE ½-INCH LED DISPLAY:** Easy-to-read frequency display minimizes "eyes-off-the-road" time.
- **PUSHBUTTON FREQUENCY CONTROL FROM MIC OR FRONT PANEL:** Any frequency may be selected by pressing a microphone or front-panel switch.
- **SUPERIOR RECEIVER SENSITIVITY:** 0.28 uV for 20-dB quieting. The squelch sensitivity is superb, requiring less than 0.1 uV to open. The receiver audio circuits are designed and built to exacting specifications, resulting in unsurpassed received-signal intelligibility.
- **TRUE FM, NOT PHASE MODULATION:** Transmitted audio quality is optimized by the same high standard of design and construction as is found in the receiver. The microphone amplifier and compression circuits offer intelligibility second to none.
- **OTHER FEATURES:** Dynamic Microphone, built in speaker, mobile mounting bracket, external remote speaker jack (head and radio) and much, much more. All cords, plugs, fuses, microphone hanger, etc. included. Weight 6 lbs.
- **ACCESSORIES:** 15' REMOTE CABLE...$29.95. FMPS-4R A/C POWER SUPPLY...$39.95. TOUCHTONE MIC. KIT...$39.95. EXTERNAL SPEAKER...$18.00.

AMATEUR-WHOLESALE ELECTRONICS ORDER NOW TOLL FREE

8817 S.W. 129th Terrace, Miami, Florida 33176
Telephone (305) 233-3631 ● Telex: 80-3356

U.S. DISTRIBUTOR DEALER INQUIRIES INVITED

1-800-327-3102

CREDIT CARD HOLDERS MAY USE OUR TOLL FREE ORDERING NUMBER.

HAM HELP

A while back, Poly Paks was selling a surplus keyboard, minus the keytops, made by C. P. Clare and Co. for Burroughs Corp. If anyone has one of these boards or extra keyswitches, I would like to buy them.

Ralph Alexander WB5ORH
Box 236
Lefors TX 79054

I recently purchased a Hammarlund Model SP-600 and a Hammarlund HC-10 converter (less hookup adapter). I will pay for manuals or any information, copies, postage, etc., regarding these two units and their compatibility. I am also in need of an adapter for the HC-10.

C.L. Gantz, Jr.
515 E. Fulton St.
Lancaster PA 17602
(717)-393-1262

I am in need of a tube-specification manual which covers receiving and transmitting types.

Larry Schad
Box 332
Afton IA 50830

I am in need of some donated QSL cards.

Gary Mitchell KH8AC
PO Drawer 909
Pago Pago, American Samoa
96799

I am in need of schematics and parts lists for the power supply and tape reader of an NCR Model 400-500 Teletype® (power supply schematic no. 095-0009500 and tape reader Model GE 4APTR61G002, serial no. 5628). Have copier or please advise.

Also needed is a dial plate (or copy) for the Philco AM/SW Model 41-250 radio, Code 121.

H. W. Wallmeier
700 W. 7
Washington MO 63090

Does anyone have information on the whereabouts of VP6LX (April, 1963) or W2PCJ/KJ6 (August, 1963)?

George Oster K0EDA
524 6th St.
West Des Moines IA 50265

I need a schematic and manual for a Gonset G151 FM Communicator.

Mark Rethemeyer
1531 Belmont
Kansas City MO 64126

I need a schematic, and service and upgrade information for the Sommerkamp FTdx-150 transceiver.

Charles Wendler K2BOZ
58 South Airmont Rd.
Suffern NY 10901

I would like to correspond with hams who have operated with or are operating with a Hallicrafters FPM300. I am interested in troubleshooting an existing problem and in learning about any modifications which can be done on this rig.

Neil F. Haeger WD6CVA
14402 Cartela Dr.
La Mirada CA 90638

I am looking for a model DD-1C Spectronics frequency readout for my Collins 75S-3 receiver.

R. E. Foltz W7JQO
PO Box 2126
Sedona AZ 86336

I need the service manual for the Clegg "99'er" 6-meter transceiver along with any information on home-brewing a suitable vfo and FMing the unit. I will pay for postage and copying.

Kevin Van Zuilen KA9GWB
205 Lehman St.
Berne IN 46711

I am looking for a schematic for an SBE VHF power amplifier, model SB-1PA.

Lennox Bodman K1NBG
29 Mt. Vernon St.
Gardiner ME 04345

I need a service manual and schematic for a Phillips Telecommunications receiver type BX 925A/09 NR BC 8380/SO502.

Mark A. D'Ornellas 8R1Y
110 Barrack St.
Kingston, Georgetown
Guyana

I need schematics, technical manuals, and crystal information for an AN/VRC-52 radio set (T-891/VRC-52 and R-1146/VRC-52). I will pay any reasonable charges for copying and postage, or will copy and return.

John Wilson KC1P
15 Kennedy Rd.
Cambridge MA 02138

I would like to hear from hams who use the Exidy Sorcerer for ham applications of any nature.

John Stover N9AMC
1521 Medora St.
South Bend IN 46628

I would like to convert a model 1-636 Royce SSB/AM 23-channel CB radio for use on the 10-meter band. Any information on how to do this would be helpful.

Lyle G. Plum WB7PXQ
3807 East Emile Zola
Phoenix AZ 85032

I need a schematic and manual for a Hammarlund HQ 100 receiver. All costs will be gladly paid.

Patrick J. Chivington W8JIB
1478 Grace Ave.
Lakewood OH 44107

I need a schematic and any technical advice for keyboard assembly 055-13-02-7OREV by Incoterm Corp., particularly for RTTY. All reasonable expenses refunded.

W. G. Mott G4KLP
2 London Bridge
London, SE1 9RB
England

RTTY Demodulators

FSK-1000 TM

Here is no compromise design and construction:
- Unparalleled selectivity achieved with sophisticated limiterless design utilizing ultrasharp active filters and decision level correction circuits
- The most flexible interface system available to computers and high voltage loops
- Built in 170 volt loop supply
- Selectable bandwidths of 55 and 100 Hz. (copies 110 Baud ASCII)
- Continuously tunable shift coverage
- Rugged construction - commercial quality throughout
- Full complement of rear panel connectors for easy interface
- Keyboard activated switch for break in operation
- Individual tuning meters and LED's for quick, accurate tuning

FSK-500 TM

This RTTY demodulator is designed for computer interface but is a fine stand alone unit:
- Easy computer interface with RS-232 or 5 volt logic signals
- Three shift coverage without straddle tuning
- Selectable bandwidths give you optimal Baudot or 110 Baud ASCII copy
- Input bandpass preselector using active filters
- High voltage loop keyer output
- Autostart built in
- Three shift AFSK keyer plus narrow shift CW ID
- Fully wired and tested: ready to copy!
- The FSK-500 is the best demodulator available for under $500.00 (Except for our FSK-1000!)
- Positive tuning with meter and LED's

iRL Order direct on Visa or MC
700 Taylor Road
Columbus, Ohio 43230
TM. Call (614) 864 2464

ALL BAND TRAP VERTICAL ANTENNAS!



FULL 1/4th WAVE - All Bands! Automatic Selection with proven Hi-Q Traps. 3 Models-ALL self supporting Ground or roof mount. HEAVY Double wall seamless Aluminum lower section - HI STRENGTH FIBERGLASS TUBING OVER -ALL. NO WOBBLY, LUMPY TRAPS - NO UNSIGHTLY CLAMPS needed Same size all the way up 1 1/4" - Traps hidden inside. You can use it in a 1 ft. sq. Backyard. Neighbors will never know this is a Hi-Power ALL Direction DX Antenna. FOR APARTMENTS, ROW HOUSES, MOBILE HOMES - CONDOS etc. where minimum space and neat appearence is MANDATORY! Instant "Drive In" ground mount (included). Use with or without radials (included). (All angle roof mount - Extra) COMPLETELY PRETUNED - NO ADJUSTMENTS NEEDED EVER! NO TUNER NEEDED. Over All Bands (except 80 meter - 400 KC) SWR 1-1 to 2-1 at Band edges, Stnd, SO239 connector - 50 ohm for any length RG58U - RG8U feedline. Matches ALL MAKES TRANSCEIVERS. 2000 Watt PEP. input power. Shipped - PRE-PAID IN USA. Assembles in 10 min. using only screwdriver. WEATHERPROOF!

No.-AVT80-10 — 5 Band — 29'11" — $179.95
No.- AVT40-10 — 4 Band — 19'3" — $129.95
No.- AVT20-10 — 3 Band — 11'6" — $99.95

SEND FULL PRICE FOR PP DEL IN USA (Canada is $5.00 extra for postage, clerical, Customs etc.) or order using VISA, MASTER CARD or AMERICAN EXPRESS. Give Number and Ex. date. Ph 1-308-236-5333 9AM-6PM weekdays. We ship in 2-3 days. Prices will increase, so order NOW AND SAVE. All Antennas Guaranteed for 1 year - 10 day money back trial, if returned in new condition. Free Inf.

WESTERN ELECTRONICS ✓80
Dept. A7- 6 Kearney Nebr. 68847

HAM HELP

I am looking for active Radio Shack TRS-80 and Sinclair ZX-81 computer user's nets. I am interested in when these nets meet and the frequencies they meet on. I am also interested in the locations of the following aircraft and marine beacons (all frequencies in kHz): A-320, BNO-396, BNU-396, COR-206, EBY-391, FR-355, GWF-282, HMM-410, INE-521, LYI-415, MF-371, NO-351, OT-376, PNA-392, QQ-401, RD-410, SL-288, TA-390, UNB-388, VI-220, XSD-278, and ZP-368.

Gary Payne KE6CZ
1347 E. Dakota
Fresno CA 93704

I need a manual for the Beckman-Berkley model 7751 frequency counter and a 1000-kHz, 115-V ac crystal oven for same. I am also looking for the manual for the 312B4 Collins speaker console. I will purchase outright or copy and return.

Bill Neilsen WB4APC
Rt. 2, Box 253E
Radcliff KY 40160

I would like to obtain a motor-divider PC board number 1A2 for a GXC5 military FAX unit. A schematic and/or manual for this would be handy.

Al Cikas KA9GDL
2112 Stonehenge
Springfield IL 62702

I need schematics or any information for the Hammarlund HQ110, Hammarlund HQ180, and Hammarlund HX500 transmitter. I also need information on the Teletype® 28RO teletype machine and the Gonset G-50 6-meter Communicator, and instructions on how to convert the Communicator to FM.

Tom Blessing
294 Helen Ave.
Xenia OH 45385
(513)-372-9341

I would like to use my TRS-80 Model I for SSTV work and would like to get in contact with anyone who has information on how to do this.

Dale Clark N9APX
40194 N. Glendale
Zion IL 60099

I am looking for:

- the instruction booklet for using the Johnson transceiver tester
- information on how to convert the Heathkit SB310 receiver for 10- and 15-meter band coverage
- information on how to modify the Heathkit SB102 for more sophisticated operation

I will copy and return or forward payment for the above.

Robert Ross VE3LPJ
4 Meadowlane Dr.
Brampton, ONT L6W 2R4
Canada

Is there a reader of *73* who can write an article about the Japanese radio-intercept training program that took place at the Eastern Signal Corps Training Center in Ft. Monmouth NJ in 1944?

Gordon E. Hopper
75 Kendall Ave.
Framingham MA 01701

I am interested in the 1750-meter band and would enjoy hearing from someone who is/was using this frequency. I am interested in learning about receiver conversion and transmitter design, as well as activity on this band.

Rex Faulkner N4EYE
3413 Covington Dr.
Augusta GA 30909

An amateur in the Ivory Coast is looking for a RTTY program and interface to use with the Atari 800 computer. Can anyone help me to help him?

Fred Trick, Sr. KB9UB
Zetfred Company
PO Box 265
North Manchester IN 46962

Wanted: Robot Model 70 SSTV monitor, regardless of condition.

Dante Ventriere KA4JRE
17831 NW 81 Ave.
Hialeah FL 33015

Wanted: amateur radio QSL cards prior to 1930 for old-time display.

Dave Noon VE3IAE
19 Honeysuckle Cr.
London, Ontario
Canada N5Y 4P3

I am looking for a schematic, service manual, and connections for a Motorola Twin V Trans-type CC 3006 6/12-volt radiophone, model W43GGD-2. I am also looking for information on the BC733F radio receiver. I will pay all costs for postage and handling.

William Pence
800 Old Stage Rd.
Cave Junction OR 97523

I need a schematic or any other information on the model 300/600 digital counter sold by Crescent Wire and Cable Company, circa 1976.

Harold May
428 Phillippa
Hinsdale IL 60521

I need a schematic and operating manual for a Knight KG-2100 dc oscilloscope.

Joe Bische KA4HAG
3412 29th St. W.
Bradenton FL 33505

Our club is in dire need of a service manual for a Johnson Thunderbolt linear amplifier, catalog # 240-353.

Ronald Daly WB0ZNI
Hot Springs
Amateur Radio Club
Box 385
Hot Springs SD 57747

I need schematics for the 2-meter Edgecomm mobile radios 25A and 3000A. I will pay copy costs and postage.

Rudolph Fallang KA7DTA
717B SE 6th
College Place WA 99324

I am looking for a DG-5 digital display and a DS-1A dc-dc converter for a Kenwood TS-520S. Please state condition and price, including shipping.

John P. Iorio WD4MWH
5228 Longview Dr.
New Port Richey FL 33552

I am looking for a Vocaline AT-30 420-MHz transceiver. These units are very old, but I am sure that one can be found.

Allen Harris
3047 Worden St.
Muskegon MI 49441

I am in need of a source for stainless spring rod in pieces that are five feet long and no more than 1/8" in diameter. Tapered replacement CB whips are not quite long enough.

Stan Hockman KA4DSK
638 Flager Blvd.
Lake Park FL 33403

I need a schematic diagram for a Collins 651S general-coverage receiver. I will pay for the copies and postage.

Tom Kormanik
14114 St. Marys Ln.
Houston TX 77079

I am looking for a Hallicrafters SX-73 or SX-73A receiver. I would like to use the receiver for DXing the 540-1600-kHz broadcast band.

John Creque
1121 Berdan Ave.
Toledo OH 43612

I am looking for a schematic and service manual for the model 33 Sideband Engineers transceiver. I would also like some information on how to convert this rig for CW use.

Ka Kanana
158 SW Oaklyn St.
Palm Bay FL 32905

I am returning home from Germany to the Rome/Cartersville, Georgia, area. Any job information for a First Class Radiotelephone and amateur Extra class licensee commencing in August would be most appreciated.

B. G. Echols, Jr.
WA2NYR/DA2EJ
University of Maryland
Jaeger Kas., Bldg. 26
APO New York NY 09162

I would like to get a Novice license. Are there any nearby hams that could help me on my days off? An hour every other weekend would be a great help.

Robert Good
Box 86
Overbrook KS 66524
(913)-665-7483

I need a service manual and schematic diagram for a Motorola T41GGV series "Twin V" transceiver. I will pay reasonable copying costs or copy and return.

Jeffrey Miller WD4SMA
2112 Natahoa Court
Falls Church VA 22043

I am looking for manuals and specification sheets for Hallicrafters SX101 and SX42 receivers. I will buy your originals or pay for copying.

Bob Allie
736 Pine St.
Central Falls RI 02863

CORRECTIONS

Please note the following information:

- The coaxial collinear described in "Omni-Gain," an article in the May issue of *73*, is incorrectly shown in Fig. 3. The ¼-wave stub should be shorted at both ends, as described in the text.
- A complete kit of parts for the "Fun-Amp" featured in the May, 1982, issue is available from Radiokit, Box 4115, Greenville NH 03048 for $37.95.

Tim Daniel N8RK
***73 Magazine* Staff**

The printed circuit board layout for "Home-Brew a TVRO Downconverter," March, 1982, should have included both sides. The top and bottom of the board should be etched as shown here in Figs. 4 and 5.

Also, the three coupling capacitors shown in the parts placement diagram should be 50-pF disc ceramics, not the .01-uF ones shown.

S. F. Mitchell WA4OSR
Mobile AL

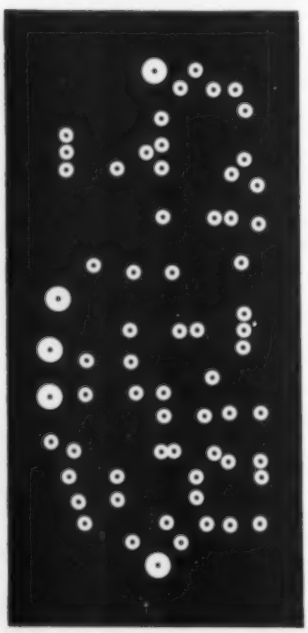

Fig. 2. Foil layout for top side of the filter/amplifier board.

The TVRO filter/amplifier and demodulator circuit boards shown in "'Lite Receiver IV," May, 1982, are double-sided. The foil patterns for the component (top) sides of these boards are given here as Figs. 2 and 3.

J. Richard Christian WA4CVP
Mobile AL

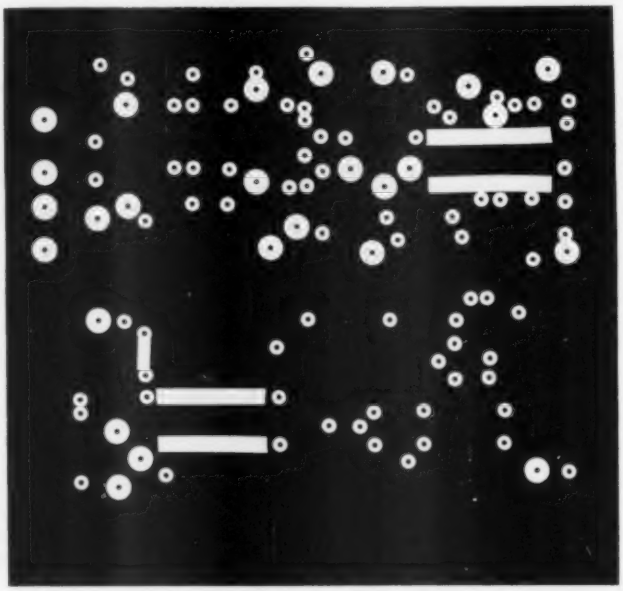

Fig. 3. Foil layout for top side of the demodulator board.

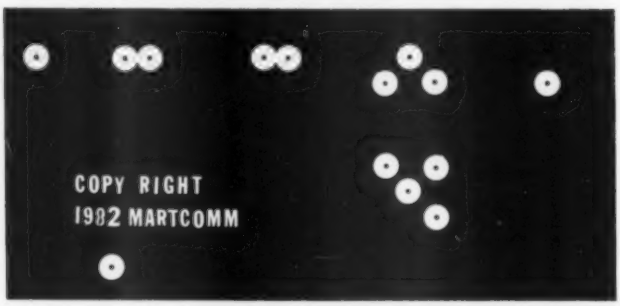

Fig. 4. Top side of double-sided circuit board.

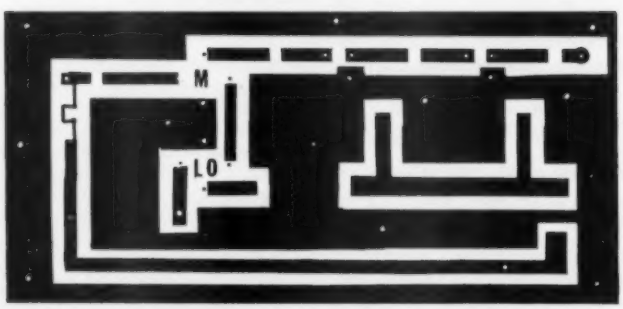

Fig. 5. Bottom side of downconverter circuit board.

SATELLITES

BEYOND PHASE IIIB

With the Phase IIIB launch still set for early July, there are now increasingly bright prospects for geosynchronous launch opportunities for amateur satellites. It appears that there may be two such possibilities by the end of 1985. The first of these is a test flight of a vehicle designed for launching a new US defense satellite. The second is a test launch of a new European Space Agency (ESA) vehicle called Ariane 4.

In both cases, the available payload is enormous by amateur satellite standards: 1200 pounds for the US launch and 4400 pounds for the ESA flight. Needless to say, AMSAT officials on both sides of the Atlantic are pursuing these unique opportunities. It has been suggested that the time may be at hand for AMSAT to coordinate its activities with other amateur space groups, in order to make full use of the large payloads. It may well be a case of "use it or lose it."

SPACEWEEK: JULY 16-24

The week of July 16-24 marks the 13th anniversary of the Apollo 11 flight, during which man first set foot upon the moon. "Spaceweek" is a national celebration to commemorate this historic event and to demonstrate public support for space exploration. Activities include exhibits, lectures, and a petition drive to show our leaders in Washington DC that Americans really do favor an active role in space for the United States.

Spaceweek activities in each local area are organized by volunteer groups. The *Spaceweek Handbook*, which tells how to conduct a local Spaceweek, is available from the group's headquarters for a $10 donation. Write to Spaceweek National Headquarters, PO Box 58172, Houston TX 77258.

The above informaton is courtesy of *AMSAT Satellite Report*, PO Box 27, Washington DC 20044.

OSCAR 8 Orbital Information for June

Orbit #	Date	Time (GMT)	Eq. Crossing (Degrees West)
21603	1	0102:51	81.9
21617	2	0107:22	83.0
21631	3	0111:53	84.2
21645	4	0116:24	85.4
21659	5	0120:55	86.5
21673	6	0125:26	87.7
21687	7	0129:57	88.8
21701	8	0134:28	90.0
21715	9	0138:59	91.2
21728	10	0000:19	66.5
21742	11	0004:50	67.7
21756	12	0009:21	68.8
21770	13	0013:52	70.0
21784	14	0018:23	71.2
21798	15	0022:55	72.3
21812	16	0027:26	73.5
21826	17	0031:57	74.6
21840	18	0036:28	75.8
21854	19	0040:59	77.0
21868	20	0045:30	78.1
21882	21	0050:01	79.3
21896	22	0054:32	80.4
21910	23	0059:03	81.6
21924	24	0103:34	82.8
21938	25	0108:05	83.9
21952	26	0112:36	85.1
21966	27	0117:07	86.2
21980	28	0121:38	87.4
21994	29	0126:09	88.6
22008	30	0130:40	89.7

OSCAR 8 Orbital Information for July

Orbit #	Date	Time (GMT)	Eq. Crossing (Degrees West)
22022	1	0135:11	90.9
22036	2	0139:42	92.0
22049	3	0001:03	67.4
22063	4	0005:34	68.6
22077	5	0010:05	69.7
22091	6	0014:36	70.9
22105	7	0019:07	72.0
22119	8	0023:38	73.2
22133	9	0028:09	74.4
22147	10	0032:40	75.5
22161	11	0037:11	76.7
22175	12	0041:42	77.8
22189	13	0046:13	79.0
22203	14	0050:44	80.2
22217	15	0055:15	81.3
22231	16	0059:46	82.5
22245	17	0104:17	83.6
22259	18	0108:48	84.8
22273	19	0113:19	86.0
22287	20	0117:50	87.1
22301	21	0122:21	88.3
22315	22	0126:52	89.4
22329	23	0131:24	90.6
22343	24	0135:55	91.8
22357	25	0140:26	92.9
22370	26	0001:46	68.3
22384	27	0006:17	69.5
22398	28	0010:48	70.6
22412	29	0015:19	71.8
22426	30	0019:50	72.9
22440	31	0024:21	74.1

DON'T TIME OUT . . . 'TIME IN'

Model TI-10 time alert for repeater operators to avoid timing out the repeater

Resets on carrier drop-out
Piercing, 6.5 KHz alert tone
Adjustable timing period
Can be used as I.D. reminder

Sensitive enough for handhelds
100% solid state; no relay switching
Handsome styling, durable case
Battery Powered;
Senses RF carrier—no connections to rig

Model TI-10 assembled.....$69
Model TI-10K, kit form.....$57
Printed Circuit Board and Documentation.....$20
Shipping and handling....add $3

When ordering, please specify model. If you act before July 4, 1982 receive a $10 discount on the TI-10; $5 discount on the TI-10K

COMSTAR RESEARCH ↩140
P.O. BOX 771 Madison Heights, MI 48071

COMMUNICATIONS DIVISION

(We Speak Your Language.)

Backed by over 54 years of experience, Harvey continues to offer the broadest selection and finest service available for the amateur radio community. This experience has taught us that the ham needs special treatment and that is why Harvey has established a special division dedicated to the needs of the U.S. and foreign ham alike.

One thing is for certain. A ham will never get the run around from Harvey. If we don't have something in stock, we say so and will order it for you—or—tell you where to get it. However, we are sincerely dedicated to the ham community and, as a result, our expansive inventory means that, more than likely, we will have what you are looking for *in stock.*

ICOM IC-720A

Yaesu FT-One

AGA
Alliance
Antenna Specialists
Astron
Bearcat
Bencher
B&W
Centurion
C.D.E.
Cushcraft
R.L. Drake
Gotham Antennas
Grundig
Henry Radio
H.M. Electronics
Icom
Kantronics
K.D.K.
Larsen
McKay Dymek
M.F.J.
Midland
J.W. Miller
Mirage
Wm. M. Nye
Pace
Regency
Ritron
Russell
Signals
Sinclair
Telex Hygain
Trilectric
System One
VoCom
W.S. Engineering
Yaesu

CALL TOLL FREE:
1-800-223-2642
Ask for Dou "Joe" Chin—KB2MU

HARVEY ↩129
25 W. 45th St., N.Y., N.Y. 10036 (212) 921-5920

↩See List of Advertisers on page 114

FUN!

John Edwards KI2U
78-56 86th Street
Glendale NY 11385

LOGIC PUZZLES

Recently, on a day when 15 meters was dead and I had nothing else to do, I pulled out my Dover Books catalogue and began thumbing through its pages. For those of you not acquainted with this firm, Dover is a company specializing in all types of quality paperback reprints priced from about one to five bucks. Within the pages of their catalogue, you can find books on subjects ranging from dying cloth with crushed insects, to the complete engravings of Albrecht Dürer. They also have a selection of old-fashioned postcards that can be made into fantastic QSLs.

At any rate, I'm plowing my way through this catalog and what should I see listed but a book by Hiram Percy Maxim. Yes, *the* Hiram Percy Maxim. As I mentioned in a column back in 1980, among HPM's many accomplishments was an autobiography entitled *A Genius in the Family* (later made into the 1946 movie *So Goes My Love*, starring Don Ameche and Myrna Loy). Well, it seems that Dover has dusted off this mighty tome and is offering it to an anxious public for the tantalizing sum of $1.50.

If you're interested in ordering a copy (and should any *real* ham be without one?), you'll find it on page 52 of the 1981-82 catalogue listed between *The Handbook of Pictoral Symbols* and *Obedience Training For Your Dog*. To order, write to Dover Publications, 180 Varick Street (slightly south of the FCC), New York NY 10014, and ask for book 20948-2. Be sure to add 70¢ for handling. I can hardly wait to see the faces on the people at Dover when they suddenly get a few hundred requests for a book by Hiram Percy Maxim.

Last January's logic puzzle in the Reader's Corner seems to have struck a responsive chord. In fact, since the puzzle appeared, I've received over two dozen letters asking for more problems devoted to logic and reasoning. Since FUN! always aims to please its readers, this month we're dedicating the entire column to logic games. These puzzles are by far some of the most complex riddles ever published in FUN!, so be sure to keep a glass of ice water or some other suitable refreshment nearby. We don't want to burn out any brains.

ELEMENT 1—THE REPEATER COUNCIL

The Northern South Dakota Repeater Council has a highly involved system of repeater group representation. According to the rules of the council, each repeater is represented by four members, but because of overlapping repeater club memberships the following complications exist:

- Each person on the council is simultaneously the representative of two different repeater groups.
- Every pair of repeater clubs has one representative in common.

In this maze of conflicting allegiances, the NSDRC accomplishes little in the way of frequency coordination, which isn't unusual for a group of this sort. Nevertheless, the council's organization presents an interesting puzzle, which is: *How many repeater clubs are represented on the NSDRC and what are the total number of representatives?*

ELEMENT 2—THE JAMMER

A recent murder case involved the homicide of an alleged repeater jammer. In one order or another, six hams, Walt, Jimmy, John, Bob, Nat, and Harvey, were the victim, the murderer, the witness, the policeman, the judge, and the hangman. Here are the facts of the case: The victim had died instantly from the effect of a close-range gunshot wound. The witness did not see the crime committed, but testified to hearing an altercation followed by a shot. After a lengthy trial, the murderer was convicted, sentenced to death, and hanged.

- Nat knew both the victim and the murderer.
- In court, the judge asked Walt to give his account of the shooting.
- Harvey was the last of the six to see Jimmy alive.
- The policeman testified that he picked up John near the place where the body was found.
- Bob and Harvey never met.

What role did each ham play in this tragic story?

ELEMENT 3—DXCC COUPLES

Many husbands and wives are avid DXers. One afternoon, Stan, Frank, and Joe, along with their wives, whose names in random order are: Susan, Wilma, and Diane, got together to compare their DXCC totals.

- Diane, Wilma, Susan, and Frank have 206, 202, 200, and 194 countries respectively.
- Stan and Joe have 198 and 196 countries, but for some time they couldn't tell who had made which since they both had bad memories and lost their copy of *QST*.
- When the fellows finally found the *QST*, it turned out that two of the couples had the same total.
- Frank's wife has more countries than Stan's wife.

What is the name of each man's wife, and how many countries do Stan and Joe have confirmed?

ELEMENT 4—CENSORED MULTIPLICATION

The following example of multiplication has been attacked by the "Math Censor." He's taken most of the digits in this problem and replaced them with x's. It's up to you to restore the problem to its correct form. (Note: The 4s, 5s, and 6s remaining are not necessarily the only digits of those values in the example.)

```
      6 x x
      x x x
    -------
      x x x
    x x x x
  x 5 x 5
  ---------
  x x 5 x 4 x
```

Uncensor those digits!

ELEMENT 5—THE ORGANIZATION

Six hams: John, Mary, Carl, Stan, Harry, and Dick, are the only people interested in running for the offices of president, first vice president, and general manager of a certain national organization.

- John won't be an officer unless Harry is president.
- Mary won't serve if she outranks Carl.
- Mary won't serve with Dick under any conditions.
- Carl won't serve with both Harry and Dick.
- Carl won't serve if Dick is president or Mary is general manager.
- Stan won't serve with Carl or Harry unless he outranks them.
- Harry won't be first vice president.
- Harry won't be general manager if Stan is an officer.
- Harry won't serve with John unless Dick serves too.
- Dick won't serve unless either he or Carl is president.

How can the three offices be filled?

THE ANSWERS

Element 1:
There are ten persons representing five repeater groups.

Element 2:
Walt was the policeman, Jimmy the murderer, John the witness, Bob the victim, Nat the judge, and Harvey the hangman.

Element 3:
Stan is married to Diane, Frank is married to Wilma, and Joe is wed to Susan. Stan has 198 countries and Joe 196.

Element 4:

```
  645
  721
 ----
  645
 1290
4515
------
465045
```

Element 5:
Carl is the president, Mary the first vice president, and Harry the general manager.

SCORING

Element 1:
Twenty points.

Element 2:
Twenty points.

Element 3:
Twenty points.

Element 4:
Twenty points.

Element 5:
Twenty points.

Let's get logical.

1-20 points—Scatterbrain.
21-40 points—Utterly confused.
41-60 points—Room temperature IQ.
61-80 points—Computer-like.
81-100 points—Mr. Spock.

The following amateurs were missing from last month's list of those solving January's Reader's Corner. *Found 1 solution:* Ed Larose KS5V, John Hufschmid KI9J, Bob Kendall VE4ZH, and Marien Kendall XYL-VE4ZH.

DX

Chod Harris VP2ML
Box 4881
Santa Rosa CA 95402

COMBATTING THE SUMMER DOLDRUMS

Doldrums. A state of inactivity, stagnation, or slump; a spell of listlessness. What the bands do in the summer. The pits. What do the enthusiasts of the various bands do during the summer doldrums?

The high level of atmospheric noise (QRN) ruins the lower frequencies for most DX. The 160-meter specialist disconnects the rig and spends the summer nights sleeping, dreaming of living on a mountain of copper plate. His days are filled designing the perfect ground and wondering if his neighbors will notice those copper wires in their swimming pools.

The 80-meter enthusiast splits his time between repairing winter-damaged wire antennas and checking the noisy sunrise and sunset openings for some other masochistic DXer. The pickings on the band are poor. There are too many leaves on the trees to shoot the arrow through the branches and haul the antenna up anyway. Maybe there's a baseball game on the tube.

The 40-meter DXer paces off his imaginary 2-element monobander in the back yard for the fifteenth time. No matter where he places the tower, the elements will hang over his neighbor's yard. That neighbor, of course... is the one who has never been very friendly since that incident with the TV set. It looks like another season with the inverted vee. Maybe a reflector element hung between that light post and the fence...

Twenty meters stays open, after a fashion, all summer. The high absorption and occasionally high noise level combine with amateurs pushed down from the higher bands so conditions are hectic. But it is possible to make contacts outside your continent. Antenna work can wait until the winter proves that the beam really is too big and blows it over.

Fifteen meters flashes with occasional excitement; it's probably the best band to watch carefully during the month. The

The Catholic church overlooking Main Street, Easter Island. Antennas mark CEØAE.

Father Dave Reddy, O.F.M., CEØAE. The Chilean flag has flown over Father Dave for years.

CEØAE as most of the amateur population sees (hears?) him. Father Dave's 5BWAS sits above the list of countries needed, the latter always at hand.

band opens toward the sun in the morning, often very rapidly. The most distant stations fade rapidly as the MUF climbs, but the shorter path DX stays strong for hours. The sunrise and sunset hours at the DX location remain the best bets.

Ten meters suffers badly from the summer doldrums. But the changeable ionosphere does give the band a little pizzazz once in a while. 15 meters provides a good predictor of 10-meter band openings. As 15 meters shortens up (the more distant stations lose signal strength, the closer stations improve), 10 might be opening in that direction. A rapid shortening of 15 suggests tuning to 10 and trying a few CQs. The first few stations on the newly opening band get the best DX.

Six-meter fans are finding F2 propagation scarce, but the always-exciting E-skip keeps the summer interesting. Solar flares liven the band a couple of times during the summer, but the real excitement awaits the return of shorter days.

DX activity and the overall level of effectiveness of the bands do indeed drop during the middle of the summer. The increase in solar radiation during the longer days increases the absorptive properties of the ionosphere much more than the refractive ones. The signals aren't escaping into space as they do when the maximum usable frequency is low. Our radio waves are being absorbed by the same ionosphere which permits long-distance communications in the first place.

But a few bright spots shine through the murky bands. The declining sunspot cycle flashes with a fickleness which strikes terror in many a propagation forecaster. A sudden solar flare can produce the most incredible long-path openings one night, and drive the absorption so high the next day that you can't work across the block. But favorable conditions as the flare just starts make up for the crummy conditions the next day or two.

Take advantage of these transient gifts to the dedicated DXer by checking the bands at least twice a day. Monitor WWV on a couple of different frequencies, if possible, until you can tell when conditions are a little strange, a little wilder than normal. Try some of those long-path directions and times. Most superb band conditions pass unexploited because "everyone knows the band isn't open *then*!"

Another encouraging aspect of the summer doldrums is the occasional cool breeze of good conditions. The level of absorption varies daily and frequently drops low enough to permit some good DXing. Again, daily or twice daily monitoring and occasional transmitting ensure catching these openings.

But during these months of perfect weather, between the occasional flashes of real excitement on the bands, this writer's attention begins to wander. I start to think how some of the South American amateurs are contending with the winter storms, amateurs such as our *73* profile: CEØAE.

When a visitor walks slowly up the wide, dusty main street, he looks toward the church square, drawing attention from the crumbling walls and rust-stained roof of the church itself.

But what is that sticking up above the roof of the church? It looks like... it is! A multiband vertical, with radials strung out just over the roof line. An RG-58 feedline runs off the back of the church and crosses over a long-neglected garden to a tiny house, overrun with vines and cats. A garden gate hangs from a strap of rubber tire under a collapsing grape arbor. The person who lives here has interests other than gardening.

Indeed, a telltale crackle from the window on your right hints at the avocation of the long-time resident: That smooth CW radiates from the fist of Father Dave CEØAE, on Easter Island, in the Pacific.

Father Dave Reddy, O.F.M., landed on this remote rock, thousands of miles from any other inhabited land, on the recommendation of Father Sebastian, the former Catholic priest of Easter Island. Father Sebastian, widely recognized as the father of modern archeology on Easter Island, as well as father of his flock, interviewed Father Dave in the United States shortly before the former's death. Soon thereafter, Father Dave embarked on the fulfillment of a longtime dream: operating ham radio from the South Pacific. He left the seminary in Buffalo, New York, where he had been teaching, for Santiago, Chile, to learn Spanish.

His arrival in Chile (the country which controls Easter Island) was untimely. Leftist leader Allende rode to power on the back of anti-American slogans, and Father Dave could not get the necessary permission to assume his role as the spiritual leader of Easter Island.

Although the journey was neither short nor straight, Father Dave did finally arrive on Easter Island, with built-in status as one of the leaders of the tiny island. His predecessors in the role of Pastor of Isla de Pasqua helped forge a nucleus of "Who's Who" on Easter Island along with the Governor, Mayor, and heads of the small military units on the island. Father Dave rapidly forged another reputation as an active and congenial amateur radio operator, CEØAE.

Today, Father Dave welcomes visitors with the same friendly cheer so well known to his on-the-air contacts. His hearty laugh and ever-present smile and good humor provide a welcome touch of the States in this remote corner of the world. His Long Island twang, which strongly colors his Spanish, betrays his New York heritage. The visitor suspects he welcomes the chance to speak English other than "59 100."

It is hard to say which of the items I brought from the United States Father Dave most appreciated: the spark plugs and replacement gearshift knob for his jeep, the diodes to repair a seldom-used Collins 30L1 amplifier, or the two big jars of chunky peanut butter. I suspect the last. The food on Easter Island is monotonous and expensive, and the passing of the plate at the Sunday service permits few luxuries.

The presence of amateur radio visitors promised another bright spot in the slow life on Easter Island. Father Dave welcomed the assistance of the visiting amateurs in improving his antenna farm, heavily damaged by the storms which sweep in from the northwest. Spare parts and tower-climbing ability are scarce in Easter Island, but the generosity of his amateur visitors and a little help from some passersby left CEØAE with a credible set of skyhooks.

Father Dave divides his time on the Isla de Pasqua between his church, DXing, and his Boy Scout troop, one of two on Easter Island. On Chile's Constitution Day, he organized the Scouts into the parade, then raced to join the other island authorities in the viewing stand. The Scouts themselves quickly joined the viewers at the side of the parade route as soon as they passed the viewing stand. There simply aren't enough people on the entire island to both have a parade and have people watching it. Everyone serves double duty.

A good time to work CEØAE is during a contest. He lets few pass without at least a few contacts. He claims a *laissez faire* attitude toward amateur radio contests, but his actions suggest a more positive attitude toward their periodic madness. When his 10-meter signal appeared to be interfering with the public address system in his neighboring church, Father Dave would hear none of any suggestion that the visiting amateur curtail operations during

the Sunday service. "Nonsense! You go right ahead and operate. I'll turn off the church mike and talk louder." And he did!

While Father Dave often can be found in contests, he admits he prefers DXing to contesting. Easter Island lies south of the tropics, and the band conditions are not as uniformly superb as in the West Indies or other more northerly islands in the Pacific. So band openings to the heavy amateur concentrations in the Northern Hemisphere are shorter and not as strong as those enjoyed by his competition in the tropics. And the absolute lack of any local contacts makes serious contesting difficult. Easter Island is no place to go to win an amateur radio contest, despite the extra 20 dB the CE0 callsign imparts.

"Besides," Father Dave reminds his visitors, "Sunday is my busiest day."

Father Dave shows some of the signs of the hard-core DXer: His greatest fear is that he won't get on the Honor Roll before Easter Island loses its status as a separate country.

Easter Island no longer a separate country for DXCC? Father Dave explains, "Continental drift is sweeping Easter Island toward mainland Chile at the rate of 2 inches per year. We'll be within 225 miles of Chile and lose our status as a separate country in only 70 million years. I hope I can work the last 47 countries I need before then."

How can you increase your chances of working Father Dave next time he shows up on 15 meters? Maybe you should review the phonetics for your callsign.

CHOOSING YOUR PHONETICS

(This part of the column is for phone operators only; we'll get to the CW crowd in another column.) Proper choice of phonetics can spell the difference between success and failure in DX pileups. How do you choose the most effective phonetics for *your* callsign?

Think about why you use phonetics: The purpose is to reduce ambiguity. So many letters sound the same in the English language: b, d, e, t, p, g, c, v, z. Even under perfect conditions, most DX stations confuse stateside calls. In the confusion of a typical phone pileup, these letters are impossible to tell apart. So you turn to phonetics.

You want the DX station to recognize (and come back to) *your* callsign, and hopefully before he comes back to someone else's. So your phonetic callsign should be unique, it should reduce confusion, and it should be easy to copy through the pileup. Does your phonetic call meet these objectives?

THE CHOICES

The first place to look for phonetics is the standard list found in any amateur radio handbook or training manual. This standard list is remarkably good, but it does have a few problems for DXers. One example: After making thousands of contacts as WA1SQB, I would like to personally throttle the idiot who picked "sierra" for S. Sierra is C. I still hear sierra and write C. "Sugar" gets through as well as sierra, without the ambiguity.

Short phonetics punch through pileups faster than long ones. The amateur who uses short, punchy phonetics can get his call in twice as often as the ham who uses longer ones. Guess who works more DX? "Fox" is vastly preferable to "Florida." And the DX station can fall asleep or, worse, work someone else, while I struggle with "Washington American One Santiago Quebec Bolivia Portable Victoria Portugal Nine."

Which brings us to another possible source of phonetics—place names. Place names make long phonetics, usually too long for pileup situations. But they can be used to good advantage in poorer conditions or to confirm a callsign. All place names share a common disadvantage as phonetics, however. Upon occasion they cause more confusion than they eliminate! Witness my callsign above, and the DX station answers, "The station in Bolivia, stand by. The Portuguese station, go ahead!"

One well known contester turned this problem into an advantage. WA1KID would often break through pileups with "WA1KIDelaware." Ethical DXers frown on such use of deceptive phonetics, however, and you will quickly find this practice leads to more harm than good.

A final hunting ground for possible phonetics: "cute" or catchy phonetics. Such as Black White Yellow, or Whiskey One No Good. Or the famous Cute Enema Seashore. Topical phonetics fall into this same category. When the race horse Seattle Slew won the Triple Crown of racing, K7SS tried Seattle Slew for phonetics.

How do you choose the best phonetic from this assortment? We'll examine how you "fine-tune" your individual phonetic for your voice and station next month.

LETTERS

THE LAST TRAGEDY

Shortly after the article "The Father of FM" (February, 1982) appeared, I thought I'd look-see for myself. Perhaps a few pictures would be in order. Sure would be nice to add to the club history (the Major Armstrong Memorial Radio Club, Alpine, NJ, on the site of the tower described in his later experiments). Several passes were made to find the location, and at last I found it hiding ingloriously behind a huge apartment, the number, 1032, hidden under many coats of paint and hard to distinguish.

There above me on the hill to the east she stood, empty, burned, and blackened, overgrown with weeds and unattended flora, alone, abandoned, utterly destroyed. Though windows below were boarded, the door swung freely in the winter wind; a foreboding feeling crept over me as I entered.

Local youths, it appeared, had added their mark to the already sickening sight. Fearfully I entered, as one would an unknown tomb, feeling the evil of such a deed. Slowly, I climbed to the room where it all began, up the main stairs which, under the paint removed by the heat, showed a lovely balustrade—the kind so many are now restoring back to the way they used to be.

If only it had had a chance, it too could have been restored as have been the homes of many of America's lesser heros, but the shame of the Bronx has reached a few miles north into Yonkers.

There before me was the room—the one with the three windows—where it began. The sounds of those words rang in my head and lifted up into the sky above. Open into the universe. Another tragedy in the tale of Major Armstrong unfolded before me and you.

And so the last tragedy in the life of Major E. H. Armstrong passed one cold December 16,

1032 Warburton Ave., Yonkers, at present. For "then," see p. 51 of the February, 1982, issue.

1981, shortly after 8:00 am, carried by the heat and smoke into eternity.

God bless his memory.

Art Bonte W2ZYC
New Milford NJ

SIX-METER NETS IN DC

The Metropolitan Communications Network Radio Club of the greater Washington (DC) area operated a repeater on six meters (52.250 MHz in; 53.250 MHz out). We would like to have repeater clubs operating six meters anywhere along the eastern seaboard contact us to establish some linkage and exchange experiences. The six-meter FM net meets Saturday at 1900 hours local time. We also have a six-meter AM net which meets Sundays at 0900 hours local time on 50.4 MHz. Sunday at 1900 hours local time we have a six-meter sideband net which meets on 50.125 MHz.

Robert Sporn WA3GGO
Corresponding Secretary
9927 Cottrell Terrace
Silver Spring MD 20903

WRITE FOR RIGHT HAMS

As a regular reader of your excellent publication, I enjoy reading your often-controversial editorial comments and the letters page, but I have now been forced to write on behalf of the large number of amateurs outside the US without whom there would be no DX. It seems that all your comments do not take any account of the very important international-contact part of our great hobby. Please bear in mind that you are no more a representative of the radio amateurs than is the editor of the *Washington Post* or the *London Times* of their respective readerships, and please take us DX operators into account.

I would also like to comment on some aspects raised in your issue of March, 1982. Concerning your promotion of a no-Morse license, I am definitely against this, especially as we in Britain have had a no-Morse VHF license for some years. As I operate both in the US and at home on both the VHF and HF bands, I have noted that despite the much larger number of US amateurs, you have a much smaller proportion of lids. Have you ever listened to the London repeaters? Also, the operating standards of US amateurs to me are much higher than the average, especially on CW. I am sure that this difference is a result of your Novice system, that I would like to see copied in the UK.

This brings me to my next subject of emergency communications, although nobody can fault your suggestion for a national data network (international?) for traffic handling. I believe that once main power supplies have gone, as they certainly will in a conflict, we will be back to CW. I believe that we should propagate some return to basic, but modern, technology in amateur radio coupled with CW operating so that in the final emergency we amateurs can salvage some communications from the remains.

Andy Hewitt G3SVD/W4
Thatcham, Berkshire, England

I can see you've never tried our repeaters in New York or Los Angeles. I monitor the London repeaters when I'm there. . .no comparison to the antics we are able to generate. Andy, where are we going to get all those CW rigs? Most of the SSB and FM ham gear these days can operate from a car battery as well as the mains. A large part of the emergency gear is mobile and hand-held equipment anyway. I can just see us all sitting there with a hand key sending messages via our handie-talkies. Perhaps some forward-looking firm will come out with a hand-key kit to provide keys which will screw on to our HTs in case of emergency need. We could even have the code printed on it for those of use who have forgotten the code.—Wayne.

A RIGHT HAM WRITES

I think that you ought to write a couple of things about Novices. I'm 12 years old and I'm a Novice. I see a lot of articles on things pertaining to General class hams but nothing about us Novices. Thanks for your time. I think your magazine is great!

Eric Farwell EF2XJI
Miami FL

Eric F., you are absolutely right! Let's see some more articles to help our Novices understand more of what is going on. We need to get them interested in simple antennas and how they work, introductions to some of our more exciting activities such as traffic handling, SSTV, ATV, RTTY, certificate hunting, contests, and so on.—Wayne.

NO MORSE A NO NO

I am writing in disagreement with your feelings about CW. Evidently you don't operate CW. I operate CW and enjoy it. I am 14 and was first introduced to ham radio when I was 11. I was attracted to ham radio because of CW; it seemed interesting. I was not scared off by CW when I was a newcomer. I work lots of CW. I do also work SSB and enjoy it, too. CW is *not* (for most) just "the usual garbage of name, location, signal strength. . ." etc., as you stated in an answer to a letter in the April, 1982, issue. I'm a ragchewer and do mostly that, though I do some DXing and contesting. I don't just give my name, QTH, etc. I talk about my family, the day, school, my future, electronics, etc. CW is fun and rewarding. CW is the root of ham radio. CW is what makes ham radio special. I am *completely* against "no-code" licenses; the last thing I want to hear is ham radio sounding like the Chicken Band (CB). So my conclusion is that CW is fun and thoughts *are* expressed on CW.

Eric Lassiter KA4KEG
Danville VA

Hey, Eric L., I'm glad you've found some chaps on CW who will give you more than the usual dull routine. That's great! Not that I can in any way single out CW for that crime. It's all too prevalent on our repeaters, and certainly not unknown on our DX bands. And I don't know of anyone who wants to have our ham bands sounding even more like CB than they do, so stop fretting about that. Perhaps I put more trust in the intelligence it takes to understand radio theory than I do in the skill it takes to copy code. I do know that you would be hard put to point out any of the more serious offenders on our bands as being good technicians. I tend to gravitate more toward hams with technical backgrounds, and to find them the most sincere and fascinating of all hams.—Wayne.

NO CODE A YES YES

Sir, I sincerely applaud you for your editorial in the March, 1982, *73 Magazine*. I find your logic in a no-code ham ticket as being beyond reproach and agree whole-heartedly with your comments. Do not give up on this, as you will prevail.

One of the most frustrating experiences I have had has been wanting to get a ham license and to do experimentation in communications. As a result of this frustration, I turned to CB radio. Most everyone knows there is a problem on 11 meters, but fads have a way of fading away, leaving only those that are sincere. The only drawbacks in my getting into ham were two items, one a myth and the other what now should be a legend, to wit: you had to spend a lot of money on equipment, and code. As has been evidenced, you can get on the air in a respectable manner without having to sell the wife and kids.

The other item, code, is rhetoric used by the elitists to keep it all to themselves.

Selfish and unconcerned as to the future of ham radio: "I had to do it, so should you," attitudes. If we were to use the logic many hams profess, we'd still be in knickers until manhood, women would not be able to vote (hmmm), and we would have legal slaves. Trying to keep code as a requirement is analogous to keeping a person on a respirator who has suffered "brain death."

I cannot for the life of me find any logic in the license requirements for code. 5 wpm, Novice, CW only; Technician, CW and phone on some VHF; 13 wpm for General and Advanced for. . . *phone* privileges? Like putting the cart before the horse, bass ackwards. In any case, code should be like blacksmithing, an art of an outdated requirement. Those who want it, do it; those who don't, won't. Code, like saving string, serves no useful purpose but you keep hanging on to it.

We need technical innovations and experimentation by those who sincerely want it while, on the other hand, providing a hobby to many. I am trying to get our local Community College to carry a non-credit course in the aspects of ham technology. So far no luck, but I will continue to try. I feel that we as Americans need to recapture the reputation for being leaders in technological advancements rather than also-rans. To do this,

we must take down our self-imposed barriers and "motivate, not frustrate" (a good anti-code slogan) new blood into ham.

I'll learn the code in order to upgrade, but I will then drop it like a bad habit. I guess that means some people will label me as a lid or other terms they put on those who want to move forward, not stay in the past. If people would sit down and unemotionally analyze the no-code proposals, using reality, and not negatively speculate on what would happen, only positive things could come about. For those who cannot follow the rules and regulations as set down, what we need is stronger enforcement of the rules, not outdated requirements such as code.

FCC has its heart and hands full in light of the budget cuts, etc. It needs help in enforcement of the rules. This could be accomplished by the use of hams themselves. Testing could be done on a local level by a group or club of hams. In my case, I would have to go to Long Beach, California, to upgrade. This would cause me to miss two days of work. Or, glory be, I could wait to see if the field office will have enough money to make a trip maybe 2-3 times a year to come to where I live.

Using local hams to upgrade future hams would also instill pride. It wouldn't take long to find out which groups are upgrading really qualified hams, as the proof is in the pudding. Nothing wrong in taking pride in knowing that your pupils have been properly supervised, instructed, and motivated in the correct methods and knowledge. However, the clout is in the hands of the diehards who insist on being outdated in putting political pressures on those who can change the code requirement. Until these "chosen" pass away to that great shack in the sky, I am afraid that the code will remain, regrettably.

There are so many positive aspects to dropping the code; if only those who wish to hold on to the past would take a *positive* view. Let's move ahead and become the leaders of advancements, not the sleeping giants that we are.

Frank J. Ward KA7LXT
Tempe AZ

Troublemaker.—Wayne.

HANG HI OL' YAGI

Even I can remember the time when one needed a yagi or a quad to work DX, the thrill of breaking a pileup, the sophistication of dual vfo's, tail-ending, and all the rest of that good stuff. To the new breed of ham, this sounds like weird talk indeed. The new DXer thinks you're out of the band when he hears about stacking five-over-five on a 180-foot tower. Who needs it? And he's right! These tales of working DX with yagis and amplifiers sound like echoes of the past, like the mumblings of bearded Honor Rollers about the gud ol' days. The new DXer knows where it's at. . .you won't find him staying up half the night in the hope of catching a rare one while the rest of the world sleeps. He's not going to spend hours calling CQDX in the hope of finding a rare bird. Hell no, he'll tune in to a DX net, of which there are now more than thirty. He'll get in line and work the rare ones without any fuss. "Like a telephone call," says one list-taker. "No cuss'n and scream'n."

We old goats have been taken in by the manufacturers, i.e., we were told it was necessary to have a beam and an amplifier if one wanted to be a successful DXer. Well, it took me five years to discover that all one needs today is a worry-free dipole and a barefoot transceiver and you can work the world.

Like an archaeological relic, a dinosaur crying out for a mate, I called CQDX today for twenty minutes on 15 meters and nothing came back. There I was with a fortune tied up in amplifiers and towers, yagis at 150 feet, and two-inch heliax. Nothing came back, so I spun up the band and there they were, twelve of them, all 5 and 9, and all semi-rare: D68, ZD7, EA8, EA9, 7Q7, 3V8, JW, and more, all sitting like clay ducks in a shooting gallery. One after another they came back to the squeaky off-frequency signals with 4 and 3 reports. (The callsigns were handed out by the control station to the DX station. Reason: speed and efficiency, of course, of course!) And what's more, everybody was happy. The gud ol' list takers stood by for the indoor dipoles and verticals. Only one guy failed to get his report, and he was using a mag-mounted Hustler whip on his rig in the basement. . .he said he would wait for propagation. (Gud man!)

We with the mile-high yagis and maximum-limit amplifiers are anachronisms, incongruities at this point of time. Down will come those relics of the past and up will go the trouble-free dipole or vertical, and out will go the amplifier. That stuff belongs with chrome-laden, 6-litre guzzler automobiles and 25-cent-a-gallon gas. Get with it, DXers, you're showing your age! Pileups are on their way out, the way individuality is out and organization is in. CU on the lists.

Don Newlands VE3HGN
Colborne, Ontario, Canada

You don't have to be an old-timer to remember the days when men were men and the endorsement sticker belonged to the strong and the quick. But now the demand for DX is way ahead of supply. A DL can raise a huge 10-meter pileup on a weekday afternoon. Rare ones who prefer to avoid the melee turn to lists. What to do? Try contesting, where the big station is worth the trouble. There's still a place for your 8877s, Don.—WB8BTH.

IT DOESN'T COMPUTE

The basic reason for not renewing my subscription to *73 Magazine* is because I feel that Wayne Green is using it to further the use of computers and associated software for communications between hams. This, I feel, reduces the human touch involved in everyday hamming. Taking away the personality of the ham and replacing it with machinery will indeed make everyone bored with the hobby. This leads to reduced growth, which is the opposite of that which Wayne is trying to achieve.

We do need growth in our hamming hobby. This will not be denied. But to substitute computers for the personal touch is not going to hack it. Contesters, DX hunters, county hunters, and rag-chewers thrive on the personal satisfaction that comes from doing it themselves. From learning a new langauge—Morse code—to building their own projects, no matter how simple or complex, each and every ham has his goal within sight and obtainable. It only depends on his ability and determination to do so.

Wayne professes that involvement with computers will revolutionize the hobby. He is absolutely correct. It will do what he wants. It will have hams all over the world making contests no more complicated than picking up the phone and dialing across the states. If that's what hams want, then why are they spending their money on better antennas, higher towers, new radios, or any other gadget that they think will make their contacts better or stronger than anyone else's? Why don't they spend it on computers and software and take all the grief out of hamming?

Computer hamming will eliminate personal satisfaction, which will in turn eliminate the desire to be an amateur *radio* operator.

Jim Ory WD9ATJ
Plainfield IL

By golly, Jim, you are probably right! We just may be able to make it so amateur radio can be enjoyed by people who haven't the kilobucks to put up monster beams and run 10,000 Watts, as you seem to prefer. We might even be able to cut back on those fun pileups which have chased most of the DX operators off the air from rare countries. But just maybe the nuts who think a new country is worth getting killed for can be siphoned off into ever more complex automatic country working, thus leaving the bands more open for getting to really know some of the DX operators. You know, the FCC was opposed to letting computers into amateur radio, too. It apparently never occurred to them that, like a typewriter or a Teletype® machine, there has to be an operator. . .a live person. . .behind each computer. The computer is just another means of communicating, little different from CW, RTTY, and so on. It turned out that the FCC chaps had virtually no understanding of the situation and were acting normally . . .fighting any efforts by hams to experiment and perhaps provide the world with some progress. Obviously, Jim, you've managed to arrive at your convictions without taking the time to ask anyone involved with

computers about the real skinny. Find out what you are talking about first...then think it over...then, and only then, go on record. Remember, Jim, that when I write something I know I will be faced with about 200,000 skeptics, each one more interested in blowing a hole in my reasoning than in agreeing with me...so I have to be darned sure I have the background to know what I am writing about. Jim, I'm ready to stand up in front of any assemblage of hams and discuss Morse code, its pros and cons. I've been at that for some thirty years now...and, as I've said, it has been quite a few years since I've heard anything new. Jim, you haven't the slightest idea of what computers may do to hamming since you haven't tried them...and apparently don't know anyone who has.—Wayne.

THE GREAT GRATER

So Wayne the Grate (just a small pun) has again taken up the Holy Grail, this time in the form of abolishing the code requirements for ham licenses.

I admire you for the courage of your convictions, Wayne, but there are more than a few of us out here who have strong objections to a no-code license, myself included.

I am a newer ham (since 1977), an electronics engineering technician, own my own personal computer, and am an active member of the Tucson Amateur Packet Radio Club. I only say this in order to dispel any idea that I am of the "fraternity" that dislikes the introduction of new technology into ham radio.

When I received my ham license in the mail, I felt something that I'm sure no CBer has felt when his permit arrived. That feeling is a sense of accomplishment. I *earned* this license, and it is that feeling that binds me together along with the majority of other hams. A "cut above," if you will. The day that bond is gone is the day that the Amateur Radio Service ceases to exist. All remaining motivating factors will be self-centered, and no longer will hams work for the "good of amateur radio."

But that is not why I write this letter. I enjoy your magazine very much, Wayne, but a couple of things disturb me. First of all, your "Holy Grail" editorials tend a bit toward ranting and raving. That can't be good for the blood pressure or the digestion. I also have noticed that your replies to the letters protesting your editorial views are usually longer than the letters themselves. My psychologist friend has some interesting things to say about that. In short, take it easy, Wayne. This would be a pretty dull hobby sometimes if it were not for cage-rattlers like you, so try to rattle softer, so that you may rattle longer.

Dave Barnhart WB7OBG
Glendale AZ

Dave, I enjoyed your letter. But you should understand that no matter how much the cages rattle, I'm sitting here grinning. My blood pressure is fine...I give heart attacks, I don't get 'em. I'm happy that I give the impression that I'm real serious about all this. Oh, I do think that it is high time to dump the code as a means of keeping enthusiasts out of the hobby...and to supplant it with a technical exam which can't be totally thwarted by the Bashes and other cheating systems. If you read the license study manuals I put out, you'll see what I think is best...simple theory explanations which anyone can understand. Fortunately, I have reason and psychology on my side...and just an interest in getting things improved, not an overwhelming zeal. Zealots are not open to alternative ideas and get all emotionally involved in what they are doing. Oh, I don't expect Morse code to get dumped quickly...perhaps some experiments with this on 220 MHz, as I proposed to the FCC about thirteen years ago, to see if we can make the change from a filter of a very slight skill (code) to a not-much-more-difficult technical test...without the universal cheating via Bash. My letter answers are long, at times, so I can clarify misconceptions.—Wayne.

CONTESTS

Robert Baker WB2GFE
15 Windsor Dr.
Atco NJ 08004

JEFFERSON DAVIS DAY QSO PARTY
Contest Period:
1500 to 2400 GMT June 5

The Pennyroyal Amateur Radio Society is offering attractive certificates for contacts made during this year's annual event. Suggested frequencies are 3730, 3940, 7260, 14310, 21410, and 28610. Requests for certificates or more information should be addressed to Pennyroyal Amateur Radio Society, PO Box 1077, Hopkinsville KY 42240.

WORLDWIDE SOUTH AMERICA CW CONTEST
Starts: 1500 GMT June 12
Ends: 1500 GMT June 13

Sponsored by *Electronica Popular* magazine of Rio de Janeiro, Brazil, this contest will be held annually on the second weekend of June. Use all bands from 80 through 10 meters on CW only; crossband contacts are not valid. Only contacts between South American stations and stations on other continents are considered for scoring. A station may be worked only once on each band. Entry classes include single operator/single band or all bands, and multi-operator/single transmitter (multiband only).

EXCHANGE:

RST and consecutive QSO number starting with 001.

SCORING:

Each QSO counts 2 points. Contacts between South American stations count only as multipliers, not as QSO points. For South American stations, the multiplier is the number of different countries worked on each band. For others, the multiplier is the number of different South American prefixes worked on each band. The final score is the sum of QSO points multiplied by the sum of multipliers.

AWARDS & ENTRIES:

Certificates will be awarded to the three top-scoring stations in each class and to the top scorer in each country. A separate log for each worked band must be sent no later than July 31st to WWSA Manager, PO Box 18003, 20772 Rio de Janeiro, RJ, Brazil.

CALENDAR

JUN 5	Jefferson Davis QSO Party
JUN 12-13	ARRL VHF QSO Party
JUN 12-13	Worldwide South America CW Contest
JUN 19-20	Summer SMIRK Party
JUN 26-27	ARRL Field Day
JUL 1	CARF Canada Day Contest
JUL 10-11	IARU Radiosport
JUL 17-18	International QRP Contest
JUL 17-18	* *A5 Magazine* Worldwide SSTV DX Contest
JUL 24-26	CW County Hunters Contest
AUG 7-8	ARRL UHF Contest
AUG 14-15	European DX Contest—CW
AUG 21-22	SARTG Worldwide RTTY Contest
AUG 21-22	*A5 Magazine* FSTV UHF Contest
SEP 11-12	ARRL VHF QSO Party
SEP 11-12	European DX Contest—Phone
SEP 18-20	Washington State QSO Party
OCT 2-3	California QSO Party
OCT 16-17	ARCI QRP CW QSO Party
OCT 16-17	Pennsylvania QSO Party
NOV 6-7	ARRL Sweepstakes—CW
NOV 13-14	European DX Contest—RTTY
NOV 20-21	ARRL Sweepstakes—Phone
DEC 4-5	ARRL 160-Meter Contest
DEC 11-12	ARRL 10-Meter Contest
DEC 19	CARF Canada Contest

* Note date change.

RESULTS

73 MAGAZINE
40-METER SSB CONTEST
—Claimed Scores—
(Callsign, QTH, QSOs, Total Contest Score)

W/VE Single Operator

VE5DX	Sask.	972	113,240
W9RE	IN	851	105,148
N3AMK	PA	771	99,180
KK9A	IL	856	87,440
KA1XN	MA	761	63,358

DX Single Operator

YU5ANE	Venezuela	359	65,880
CN8CO	Morocco	361	61,008
H44SH	Solomon Is.	291	37,765
LA5YF	Norway	221	32,319
JA2BAY	Japan	205	28,470

W/VE Multi-Operator

N9NB	IN	1098	112,965
KD4TQ	KY	972	95,432
VE2ZP	Que.	704	86,355
KJ9D	IN	681	77,868
N4BAA	FL	645	66,392

DX Multi-Operator

I4YNO	Italy	672	128,800
I5MPK	Italy	590	107,334

80-METER SSB CONTEST
—Claimed Scores—

W/VE Single Operator

KQ2M	NY	510	60,606
N7DF	UT	700	57,642
K9CS	MO	552	51,435
WB2DHY	NY	346	42,510
VE5XK	Sask.	672	42,222

DX Single Operator

CN8CO	Morocco	441	67,032
C6ADV	Bahamas	296	21,488
HI8GBG	Dom. Rep.	149	17,052
OK1MSM	Czech.	165	16,640
HI8GB	Dom. Rep.	145	14,484

W/VE Multi-Operator

N9NC	IN	793	57,652
VE2ZP	Que.	567	42,387
N4BAA	FL	421	36,480
W4CN	KY	564	35,441
KF2X	NY	413	25,488

DX Multi-Operator

I5MPK	Italy	191	22,184

40/80-METER COMBINED CONTEST
—Claimed Scores—

W/VE Single Operator

N7DF	UT	1188	180,040
KC4OV	TN	931	147,686
K8AKY	MI	880	141,885
N8ATR	OH	788	104,967
KC8JH	OH	735	100,250

DX Single Operator

CN8CO	Morocco	802	256,908
H44SH	Solomon Is.	360	71,082
JA1ELY	Japan	196	26,642
VK5BW	Australia	170	17,384
DL8UI	W. Germany	92	8,544

W/VE Multi-Operator

N4BAA	FL	1066	205,076
KF2X	NY	978	161,604

DX Multi-Operator

VE2ZP	Que.	1271	249,996
I5MPK	Italy	781	234,136

QSL OF THE MONTH: W8VFT

Sometimes, the design of a QSL card can capitalize on the unusual aspects of your station. It worked for W8VFT and his wind-powered setup. In fact, as the back of the card explains, W8VFT's entire homestead is powered by the wind generator shown on the card!

If you would like to enter our contest, put your QSL card *in an envelope* and mail it along with your choice of a book from *73*'s Radio Bookshop to *73 Magazine*, Pine Street, Peterborough NH 03458, Attention: QSL of the Month. Entries which do not use an envelope (the Postal Service does *occasionally* damage cards) and do not specify a book will not be considered.

SUMMER SMIRK PARTY CONTEST
Starts: 0000 GMT June 19
Ends: 2400 GMT June 20

Sponsored by the Six-Meter International Radio Klub (SMIRK). No crossband contacts, multi-operators, or partial contacts. Check logs or dupe sheets are not needed.

EXCHANGE:

SMIRK number and ARRL section, foreign state, province, prefecture, or country. Count ARRL sections in the 48 US states only; KH6 and KL7 count as countries. Washington DC counts as a section as well.

SCORING:

Count 2 points for each SMIRK contact, 1 point for non-SMIRK QSOs. Add QSO points and multiply by number of ARRL sections, foreign states, provinces, and countries worked for final score.

AWARDS:

Trophies for high-score SMIRK in two divisions: US/Canada and foreign. Certificates for high score in each ARRL section and foreign state, province, prefecture, or country.

ENTRIES:

Entries must be submitted on

RESULTS

1981 CALIFORNIA QSO PARTY
Sponsored by the Northern California Contest Club
(Call, CW Qs, SSB Qs, Multiplier, Score)

California Single Ops

N6TR	310	2063	58	293,248
N6BT	325	1998	57	283,347
N6BV	282	1488	58	221,676
AI6V	0	1855	58	215,180
K6HNZ	0	1659	57	189,126
KI6O	330	972	57	167,238
N6PE	362	882	56	159,600
N6QW	270	933	58	155,208
AA6G	41	1227	57	146,889
AA6RX	89	1085	57	138,909

California Multi-Ops

AJ6O(M-M)	151	1908	57	243,333
N6AHA (M-S)	105	1298	57	185,927
K6AA (M-S)	274	456	54	93,528
K6YA (M-M)	259	400	53	83,581
KS6H (M-S)	300	341	50	79,100

Out of State

WD9EWD	168	501	54	81,324
WA9AVL	171	497	52	78,364
N4BAA	141	312	49	51,303
WA5DJK	154	249	48	46,080
WB5YXK	178	149	45	37,440
W1GNR	189	113	44	34,892
K7GM	156	187	41	34,522
W3HDH	152	166	42	33,096
WA1FCN	131	149	47	32,477
KD4XR	0	342	47	32,148

DX Top Five

SM3DXC	41	1	33	4,125
JA1OP	46	0	23	3,174
JR7TJP	0	53	26	2,756
PY1NEZ	0	61	20	2,440
LU6EF	19	24	21	2,205

the fall, 1981, edition of the official SMIRK log. Single copies are available for an SASE and photocopies may be used. Send log requests, and entries postmarked by July 11th, to Spencer F. Ritchie KA2MHT/5, 5122 Sagamore, San Antonio TX 78242.

NEWSLETTER CONTEST WINNER

After a three-month hiatus, I was called upon again to choose a winner for *73*'s monthly newsletter contest. As usual, I put the task off until the last minute. This time, I was lucky; a "winner" jumped out at me. If you have an opportunity to read this month's choice, *The Log*, published by the Northern Ohio Amateur Radio Society, you'll see why.

The NOARS newsletter is not a one-man show. A rather impressive-looking masthead lists 25 names of officers, editors, and committee chairmen. The theory that many hands, working together, make for a light load applies here. *The Log*'s first page is rounded out by "Inside This Issue," a series of vignettes that make you want to turn the page and start reading.

NOARS editors KA8JRI and N8DNA make sure that there is something for everyone. They include reports for award chasers, the contest crowd, DX hounds, traffic handlers, and Novices. An historical series, "In the Beginning," will appeal to all the readers. A more somber *Log* feature is the "Silent Key" section, which incorporates the QSL cards of deceased members as part of a brief memorial.

In addition to their monthly newsletter, NOARS members receive an annual membership roster and a calendar that has the dates for club activities and operating events clearly marked. All this helps to convey the image of a lively, enthusiastic club.—N8RK.

AWARDS

Bill Gosney KE7C
Micro-80, Inc.
2665 North Busby Road
Oak Harbor WA 98277

CERTIFICATE HUNTERS CLUB

All awards are issued to both licensed amateurs and SWLs on a heard basis.

Requests for band, mode, and power endorsements must be made at the time of your original application and must be correctly indicated on your log extract.

A verified log should be sent in lieu of QSLs. Have your log certified by a local radio club official, two licensed amateurs, or a notary public. Copies of your cards will be accepted in lieu of certification.

● WTP—Work The Pacific. The basic award is issued for confirmed contact with at least 30 countries in the Pacific area as set forth by the WTP country list. Gold seal: A gold seal is applied when 50 or more confirmations are achieved. Award application fee is $3.50 or 12 IRCs; overseas, add $1.00 or 3 IRCs; gold seal after original application, $1.00 or 3 IRCs.

● WTC—Work The Caribbean. The basic award is issued for confirmed contact with at least 20 countries in the Caribbean area as set forth by the WTC country list. Gold seal: A gold seal is applied when 30 or more confirmations are achieved. Award application fee is $3.50 or 12 IRCs; overseas, add $1.00 or 3 IRCs; gold seal after original application is $1.00 or 3 IRCs.

● Gold Seal Plaques. If desired, plaques are available for the WTP and WTC award series. When requested at the time of original application, your award is mounted on a walnut-grain 13" × 16" plaque, for $25.00. (Overseas, add $7.50 postage/insurance.) When requested after your original application, an engraved 4 × 6 solid walnut plaque denoting your accomplishment is available for $20.00. (Overseas, add $3.00 postage/insurance.)

● A-1—Operator's Certificate of Merit. Issued free of cost by the IARS/Certificate Hunters Club to amateurs observed displaying a high level of achievement in various areas of amateur radio. The award is also issued upon receipt of three nominations from three different amateurs in three different geographical locations. So, if you feel that an amateur should receive this honor, get out your pen and give us the details in writing. You do not have to be a member of the club or a holder of the award to nominate.

● County Awards. Issued in multiple classes for the differ-

ent numbers of counties confirmed, in 14 states. GCR apply; fee is $3.50. The awards measure 8½" × 11" and are printed on a fine parchtone bond. Other county awards will be made available as demand requires.

● 10 K and 20 K Awards. Issued for confirmed contact with 10 or 20 different locations outside the United States operating with a W, K, or N prefix. Award fee is $2.00 and band and mode endorsements are available.

● Work A-1s. Requires applicant to work A-1 operator certificate holders of any radio organizations issued for WAC, WAZ, WAS, WPX and DX(CC). All rules are the same as they are for the regular award. Award fee is $2.00 and band and mode endorsements are available.

For applications and additional information, send an SASE to the CHC Manager, Scott Douglas KB7SB, PO Box 46032, Los Angeles CA 90046.

WORKED ALL VE

Sponsored by the Nortown Amateur Radio Club of Willowdale, Ontario, the WVE Award requires the applicant to work two different stations on two different bands in the eight sections, VE1 through VE8. All contacts must have been made from an area within a radius of 150 miles of one point on and after January 1, 1939.

A sworn affidavit and certification by a local radio club official must accompany your application. Also, be sure to send all sixteen QSL cards, two from each section, along with $1.00 and sufficient return postage for the return of your cards. Address your application to the Nortown Amateur Radio Club, Box 146, Station A, Willowdale, Ontario, Canada M2N 5S8.

The Nortown organization also sponsors the WACAN (Worked All Canada) Award. Here the applicant must work two different stations on two different bands in each of the following twelve areas: VE1 (PEI), VE1 (NS), VE2, VE3, VE4, VE5, VE6, VE7, VY1 or VE8, VO1, and VO2.

All contacts must have been made on or after January 1, 1949, and a 150-mile rule applies, as mentioned for the WVE Award.

Send your list of contacts and QSL cards, with $1.00 and sufficient funds for the return of your confirmation cards, to the Nortown ARC.

TRANS-CANADA AWARD

The Canadian DX Association writes to tell us about their very beautiful award. To qualify, you must work each of the eight VE call areas, with five contacts in each area. In addition to that, another five stations must be worked in VO1 and/or VO2; one VE0 maritime mobile station must be contacted. One of the five VE8 contacts required must be from the Yukon Territory and one must be from one of the offshore islands of the Northwest Territories. In short, a total of 46 contacts must be made to meet the minimum requirements.

WAC 2-80 AWARD

Sponsored by the Metro Amateur Radio Club of Downsview, Ontario, the Worked All Canada 2-80 Award was originated in November, 1972. All contacts and confirming cards must be dated on or after that date.

To qualify, the applicant must submit QSL cards to verify two-way contact with one station possessing a two-letter call in each of the twelve Canadian sections. Are you wondering what the 2-80 stands for? Well, it means all contacts must be made with stations *only* with two-letter calls, and these contacts *must* be made only on 80 meters. Required sections include VO1, VO2, VE1 (PEI), VE1 (NB), VE1 (NS), VE2, VE3, VE4, VE5, VE6, VE7, and VE8. There are no mode restrictions, but endorsements will be granted at the time of applications if all contacts were made on a specific mode of operation.

Contacts must be made using your own equipment from one location or from within 150 miles of it and within the same section.

To apply for this award, enclose $2.00 and sufficient postage for the return of your award and the required confirmation cards. Address all your correspondence to the Metro ARC, PO Box 352, Downsview, Ontario, Canada M3M 3A6.

ALL NOVA SCOTIA COUNTIES

The Nova Scotia Amateur Radio Association is proud to announce the WANS Award, which requires the applicant to work fifteen of the eighteen counties in Nova Scotia, Canada, or fourteen of the eighteen counties plus a contact with Sable Island.

There is no charge for this award, but applicants are asked to send QSL cards and log data along with sufficient postage for their safe return. Address your application to Mrs. Christine Weeks VE1AKO, PO Box 47, Rural Route 1, Cleveland, Nova Scotia, Canada B0E 1J0.

The Halifax Amateur Radio Club also sponsors a Worked All Nova Scotia Counties Award which states that maritime provinces must contact seventeen of the eighteen counties in the province, while at the same time they must contact ten counties on a second band or series of bands. In all cases, Sable Island can be used as a substitute.

To qualify, all contacts must have been made on or after January 1, 1977, and the application should be sent directly to the Halifax ARC, PO Box 663, Halifax, Nova Scotia, Canada B3J 2T3. There is no charge for this award, but the applicant must supply sufficient postage for the safe return of confirmation cards.

DIPLOMA OF THE FRENCH AMERICAS

From Quebec City, Canada, comes word about the French Americas Award which requires stations in Europe, Africa, North, and South America to work at least two FP8 stations, two FY7 stations, and either an FS7 or FM7 station. Applicants in Asia or Oceania must work only a single contact from the areas of FP8, FY7, and FS7 or FM7.

There appear to be no date restrictions, and applicants may have their list of contacts verified by a local radio club official and sent, along with an awards fee of $1.00 or seven IRCs, to Alex Desmeules VE2AFC, PO Box 382, Quebec City 4, Canada.

QUEBEC CITY AWARD

Speaking of Quebec City, Quebec, the local amateur radio fraternity sponsors the Quebec City Award for American and Canadian stations which make a minimum of five station contacts in Quebec City.

You may address all correspondence to the Radio Club of Quebec, PO Box 332, Upper Town, Quebec City, Quebec, Canada. The award fee is $1.00 or seven IRCs.

WORKED ALL SASKATCHEWAN PROVINCE

The Regina Amateur Radio Association is pleased to announce the WASP Award which requires the applicant to accumulate a total of 100 points to qualify. Members of the Regina organization count 10 points each to a maximum of five contacts made with members of the group. Contacts with other Regina amateurs score five points, while contacts with other Saskatchewan amateurs count two points. There must be a minimum of ten QSOs made. Send your list of contacts along with your confirmed QSLs and $1.00 to RARA Club VE5NN, 2827 Abbott Road, Regina, Saskatchewan, Canada S4N 2J9.

STONEHENGE USA

The Tri-City Amateur Radio Club will operate a special event station Saturday, June 12, 1982, from the replica of Stonehenge located near Maryhill, Washington. W7VPA will operate from 1600 to 0100 UTC on or near the frequencies of 3.900, 14.290, 21.390, 28.690, and 146.52. An attractive certificate will be awarded. Send QSL info and $1.00 to W7VPA Special Event, PO Box 73, Richland WA 99352.

HOMEWORK NET

Are you a teenager? Or still think you are? Then the Homework Net is for you, operating on 7.250 phone every Saturday from 2100 to 2200Z. It is designed for, but not limited to, teenagers. This net is looking for young amateurs who wish to make new contacts with people who have similar interests. So take a break from your homework and join us on our informal Homework Net—Diane WD9DNQ and Scott KC0NF.

WATERLOO DAYS

The N. E. Iowa Radio Amateur Association will operate special event station W0MG in conjunction with activities celebrating My Waterloo Days, on June 12-13. Activity will take place from Waterloo, Iowa, and will be on 7.240, 14.290, and 21.370. Special informative commemorative QSL card for SASE to: NEIRAA, PO Box 92, Waterloo IA 50704.

DUNGEONS AND DRAGONS

New! A 10-meter Dungeons and Dragons Net at 28.720

± QRM. Saturdays promptly at 1500 GMT. To save us time and grief, please be ready with your character, rank, dice, and all of the necessary info. Net control is KA9JOX. If you don't hear anyone at 28.720, check 28.820. If still nothing is heard, the net has been canceled because of poor turnout or other reasons and will resume the next week at the same time and place. If you wish to participate regularly, please write me so you can get a chance to be a DM or net control. Address: Michael Frost KA9JOX, Box 1008, Riverside IL 60546.

FORT DELAWARE

Fort Delaware, on Pea Patch Island, Delaware, will be the site of a mini-expedition by Wilmington area hams on the weekend of June 5 and 6, 1982.

This will be the first HF amateur operation from the fort in the middle of the Delaware River where, during the Civil War, many thousands of Confederate prisoners of war were held. The fort is now a state park.

Equipment will be limited to one transceiver fed by a small generator carried to the island by a small boat. Operations will be in the General segments of the HF bands, daylight hours only, with each operator using his own call and the Fort Delaware identifier. Members of the Independent Amateur Radio Group of Delaware will be Rick KB3PD, Allen KB3HZ, Dwight N3ARU, Ned N3ARV, and Doug N3ACU. Commemorative QSL cards will be issued to contacts supplying SASEs.

For more information, contact the Independent Amateur Radio Group of Delaware, 400 Fifth Ave., Millcreek, Wilmington DE 19808.

NOARS AND *USS COD*

Once again, signals will be radiating from the submarine *USS Cod*. Members of the Northern Ohio Amateur Radio Society will be operating from this proud WWII warship during the months of June, July, and August, using the call K8KRG. The *USS Cod* is on permanent display in Cleveland, Ohio. Operations will begin on Memorial Day and run every weekend (with the exception of Field Day weekend) until Labor Day.

An attractive certificate will be awarded for two-way contacts from the ship upon receipt of QSL card and $.50 for postage. Look for operations in the lower part of the General bands, 10 through 80 meters, on the weekends of June 5-6, July 17-18, and August 7-8; we will be operating 40-meter Novice band at 7.125. Send QSLs to Donald L. Winner WD8RZG, 8927 Torrance Ave., Brooklyn OH 44144.

NORFOLK TRICENTENNIAL

The city of Norfolk, Virginia, will be celebrating its tricentennial this year. As part of the "Harborfest" celebration on June 11-14, the Tidewater area amateur clubs will join together to operate a Harborfest-Tricentennial special event station. The amateur call W4NV will be used, and special QSL certificates will be sent to all contacts made who send a large (8" × 10") SASE. The station will operate 24 hours each day in the 80- through 2-meter bands and will work CW and SSB.

For further information, please contact Bill Verebely KC4YX, 3101 Petre Road, Chesapeake VA 23325.

LARGEST TRAIN ROBBERY

The Libertyville and Mundelein Amateur Radio Society (LAMARS) will operate W9HOQ from Rondout, Illinois, near the site of the largest train robbery in United States history. Approximately three million dollars in negotiable instruments and jewelry were confiscated during a brief stopover and all participants were apprehended within six months. Frequencies: phone—7.260, 14.290, 21.375; CW—7.125, 21.150. Time: from 0000Z 12 June until 0000Z 13 June. Certificate for a large SASE to: KB9BR or "Big Robbery," Box 656, Libertyville IL 60048.

STAR-SPANGLED BANNER SPECIAL EVENT STATION

WB3KUH will operate a special event station from Fort McHenry, Baltimore, Maryland—the birthplace of *The Star-Spangled Banner*—on June 12 and 13, 1982. Operation will commence at 1600 GMT. Operation will be within the first 25 kHz of the General and Advanced bands. Both SSB and CW will be used. Novice operation is also expected. Operation will be on 20, 15, 40, 2, and 6 meters.

Stations desiring a special certificate from the event station can obtain one by sending an SASE and their QSO number to Donald Oakjones WB3KUH, 1806 Willann Road, Rosedale MD 21237.

HAM HELP

We are happy to provide Ham Help listings free, on a space-available basis. We are not happy when we have to take time away from other duties to decipher cryptic notes scrawled illegibly on dog-eared post cards and odd-sized scraps of paper. Please type or print (neatly!), double spaced, your request on an 8½" × 11" sheet of paper and use upper- and lowercase letters where appropriate. Also, please make a "1" look like a "1," not an "l," which could be an "el" or an "eye," and so on. Hard as it may be to believe, we are not familiar with every piece of equipment manufactured on Earth for the last 50 years! Thanks for your cooperation.

I am interested in corresponding with hams who have or had any late-model Hallicrafters equipment, specifically the SR2000 Hurricane transceiver, HA20 vfo, and P2000 power supply/speaker. I am interested in operational notes, modifications reviews, and comparisons.

I would also like to obtain information on the history of Hallicrafters equipment, particularly post-1958. (I already have a copy of the *Ham Radio* article, "The Hallicrafters Story".)

And does anyone have manuals and schematics for a Heathkit IG-72 audio generator and AT-1 transmitter, Hallicrafters S38E receiver, and Eico's 1078 ac power supply, 239 TVM, and Model 315 signal generator? Write before sending.

Robert Gagne
143 Millville St.
Salem NH 03079

I would like to hear from anyone who served at the Naval Radio Station NSS, Annapolis MD, from 1942 to 1946.

Laurence E. Hoepfer N7BJT
Box 334
Columbia Falls MT 59912

I need a schematic for a Hickok Model 19XD signal generator.

Sherman Banks N4CXF
Rt. 1 Youngs Mill Rd.
Kingston GA 30145

Has anyone interfaced an Atari 400/800 to a rig for sending and receiving CW? Is software available?

John S. Lee KA4EPR
12341 Dickinson Dr. W303
Coral Gables FL 33146

I am in need of information about the WWII Navy Model MBM radio.

Tony Grogan WA4MRR
5 Rollingwood Dr.
Taylors SC 29687

I would like to contact anyone who is using the Texas Instruments TI-99/4 home computer to send and receive RTTY, CW, and SSTV.

Miguel Binstok LU1DIU
PO Box 012592
Miami FL 33101

I would like to hear from owners of the code reader made by Microcraft. I need data on how well it works, QRM, etc.

Berand G. Kirschner WB9YCQ
1440 Grand Ave. #11
St. Paul MN 55105

I would like to "marry" my Johnson Invader 200/2000 with a receiver that has a 5.0-5.5-MHz vfo so that I get transceiver-type information. Can anyone help?

Arthur Ford W2HAE
552 Hillside Ct.
Melbourne FL 32935

I need a copy of the schematic for a Hallicrafters S-107 Mark II receiver, built approximately 1961.

Sheldon Daitch WA4MZZ
Box 8091
Greenville NC 27834

AES® Closeouts!

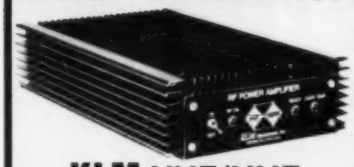

KLM VHF/UHF POWER AMPLIFIERS

Factory Sealed, late model units with One Year Warranty, including output transistors.

Model	Band/Mode	In	Out	Reg.	NOW
PA2-25B	2m FM	1-4w	25w	$ 99.95	$ 74.95
MA-35BL	2m FM/SSB	.1-4w	35w	129.95	99.95
PA4-80BL	2m FM/SSB	1-4w	80w	229.95	169.95
PA4-160BL	2m FM/SSB	1-4w	160w	299.95	225.95
PA10-90BL	2m FM/SSB	10w	90w	199.95	149.95
PA10-170BL	2m FM/SSB	10w	170w	299.95	225.95
PA15-40BL	2m FM/SSB	5-15w	40w	149.95	112.95
PA15-80BL	2m FM/SSB	5-15w	80w	179.95	135.95
PA15-160BL	2m FM/SSB	5-15w	160w	269.95	199.95
PA45-160BL	2m FM/SSB	15-45	160w	239.95	179.95
MA-35BCL	220 FM/SSB	1-4w	35w	129.95	99.95
PA4-70BC	220 FM	1-4w	70w	229.95	172.95
PA15-60BC	220 FM	5-15w	60w	199.95	149.95
PA15-120BC	220 FM	5-15w	120w	299.95	225.95
PA15-120BCL	220 FM/SSB	5-15w	120w	299.95	225.95
PA45-120BC	220 FM	15-45	120w	279.95	209.95
PA4-40CL	450 FM/SSB	1-4w	40w	279.95	209.95
PA15-40CL	450 FM/SSB	5-15w	40w	199.95	149.95
PA15-110CL	450 FM/SSB	5-15w	110w	349.95	262.95

RECEIVE PREAMPLIFIERS (Regular $62.95)	NOW
PRA-50C 6m, 10 dB, 2.5 dB NF	$47.95
PRA-144I 2m or mtg. in old style KLM amp	47.95
PRA-144II 2m for mtg. in new style KLM amp	47.95
PRA-144C 2m, 10 dB, 2.5 dB N/F	47.95
PRA-220C 220 MHz, 15 dB	47.95
PRA-E70 432 MHz for Echo 70 (Reg. $49.95)	37.95

90-Day AES Warranty

TRAM SWR/Wattmeter

Fully automatic, self-calibrating - no adjustments to make. Dual illuminated meters show watts out & actual SWR - simultaneously! Range: 1.8-30 Mhz. Power: 0-20, 0-200 & 0-2000 watts. Accuracy: ±5%. Only 10% of full scale power needed to read SWR, warning light at 3:1. Remote sensor w/50" cable. AC adaptor supplied; 6 "C" Cells for battery power. 7¼"w × 2¾"h × 5½"d.

Regular $119.95 - ***Closeout $69.95***

Closeout Quantities Limited - Don't miss out! - Order direct from this ad. Send Check, Money Order or Call TOLL FREE, 1-800-558-0411 and use MASTERCARD or VISA. Cash payment COD orders accepted. Prices do not include shipping charges.

MasterCard VISA

AMATEUR ELECTRONIC SUPPLY®

4828 W. Fond du Lac Avenue
Milwaukee, Wisconsin 53216
Phone: (414) 442-4200
Wisconsin WATS: 1-800-242-5195
Nationwide WATS: 1-800-558-0411
AES Branch Stores in: Clearwater, FL • Orlando, FL • Wickliffe, OH • Las Vegas, NV

AFFORDABLE CW KEYBOARD FROM $69.95

Transmits perfect Morse Code • Built-in 16 character buffer • Internal speaker and side-tone • Reed relay output eliminates keying problems • All solid state circuits and sockets for reliability • Speed range 5—45 WPM • Perfect companion to our CODE★STAR all-mode code reader.

MORSE-A-KEYER KIT, model MAK-K, Complete kit of parts & manual $159.95
MORSE-A-KEYER, model MAK-F, Factory wired & tested $199.95
MORSE-A-KEYER ESSENTIAL PARTS KIT, model EPK-K. . . . . $ 69.95
(Essential parts kit for home-brewers consists of pc board, board parts and manual. You supply ASCII keyboard, cabinet, power supply & miscellaneous parts.)

Send check or money order. Use your VISA or MasterCard. Add $5.00 shipping and handling for Continental U.S. Wisconsin residents add 4% Wisconsin State Sales Tax.

Microcraft Corporation **Telephone: (414) 241-8144**
Post Office Box 513G, Thiensville, Wisconsin 53092 ⌐50

The Missing Link

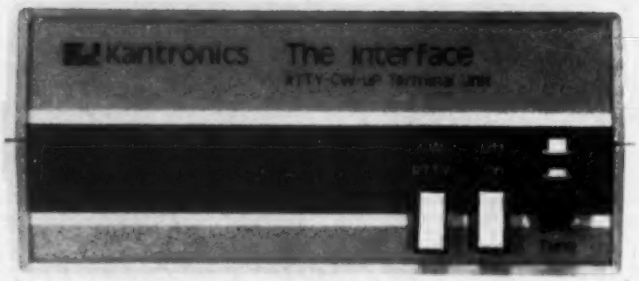

The Interface™
suggested price $189.95

Kantronics, the innovator in code readers and RTTY terminals, leads the pack again with **The Interface.**™

Your personal computer becomes a complete CW and RTTY terminal with **The Interface**™ linking it to your transceiver.

The Interface™ receives any shift of RTTY, ASCII, or CW and transmits all the necessary AFSK tones for RTTY, ASCII, and RTTY CW-ID. The manual includes a complete software example for the Apple II Plus, featuring split screen display, buffered keyboard, status display, and much more. Software is also available on diskette for Apple and cartridge for Atari.

Follow the leader, **Kantronics**, into the computer age of amateur radio. See **The Interface**™ at your authorized **Kantronics** dealer, or contact

Kantronics

(913) 842-7745 1202 E. 23rd Lawrence, Kansas 66044

⌐See List of Advertisers on page 114

ICOM

FOR THE PROFESSIONAL AMATEUR

N&G

DISTRIBUTING
7201 N.W. 12 ST.
MIAMI, FLA. 33126
(305) 592-9685
(305) 763-8170
WATTS 800-327-3364

123

SPECIAL LIMITED OFFER

SSB-CW MODE PORTABLE RADIOS

IC-502-A 6 METER
LIST 239.00 **N&G PRICE 185.00**
IC-202-S 2 METER
LIST 279.00 **N&G PRICE 215.00**

IC 730 H.F.
LIST $829.00

IC-720A H.F.
LIST $1349.00

IC-25-A
LIST $349.00

IC-451A U.H.F.
LIST $899.00

IC-2AT IC-3AT IC-4AT
Accessories Stocked

The Sweet Sounding Repeater

MARK 3CR

A Stradivarius is more than a body, neck, and strings. The name alone says it is an instrument of outstanding quality and beautiful sound.

In repeaters the name for optimum performance and clean, natural sound is Mark 3CR. And Mark 3CR also means:

- Receiver sensitivity $<$0.25 uV.
- Schmitt trigger squelch to capture fading signals
- 13 Morse messages
- Spurious rejection $>$ 65 dB.
- Autopatch and reverse autopatch
- 15 Function controlled outputs
- Die cast aluminum receiver and transmitter enclosures

For the Finest in

Repeaters • Controllers • Power Amplifiers • Link Transceivers

MICRO CONTROL SPECIALTIES 49

23 Elm Park, Groveland, MA 01834 (617) 372-3442

RADIO BOOKSHOP

FOR THE NOVICE



NEW, UPDATED EDITIONS OF OUR FAMOUS NOVICE LICENSE STUDY GUIDE AND NOVICE STUDY TAPES

● **NOVICE STUDY GUIDE**—by Timothy M. Daniel N8RK. Here is the most up to date novice guide available. It is complete with information about learning Morse Code, has the latest FCC amateur regulations and the current FCC application forms. This guide *is not* a question/answer memorization course but rather it emphasizes the practical side of getting a ham license and putting a station on the air. It reflects what the FCC expects a Novice to know without page after page of dull theory. The most current information still available at last year's price. SG7357 $4.95.*

● **NOVICE STUDY TAPES**—If you are just getting started in ham radio, you'll find these tapes indispensable! This up-to-the-minute revision of the 73 Study Course is the perfect way to learn everything you need to breeze through the Novice written exam. Theory, FCC regulations, and operating skills are all covered, and you'll be amazed at how fast you learn using these tapes!

Once the test is behind you, these tapes will go right on being useful, because they are packed with the latest information on setting up your own ham station, and getting on the air.

Thousands of people have discovered how easy learning from cassette can be—order now and enter the fascinating world of ham radio! CT7300 Set of 3—$15.95.*

Scientists have proven that you learn faster by listening than by reading because you can play a cassette tape over and over in your spare time—even while you're driving! You get more and more info each time you hear it. You can't progress without solid fundamentals. These three hour-long tapes give you all the basics you'll need to pass the Novice exam easily. You'll have an understanding of the basics which will be invaluable to you for the rest of your life! Can you afford to take your Novice exam without first listening to these tapes?

SPECIAL OFFER! Both Novice License Study Guide and Novice Study Tapes $19.95. Order NP7300.

73 CODE TAPES

ANY FOUR TAPES FOR $15.95! $4.95 EACH

"GENESIS"

5 WPM—CT7305—This is the beginning tape for people who do not know the code at all. It takes them through the 26 letters, 10 numbers and necessary punctuation, complete with practice every step of the way using the newest blitz teaching techniques. It is almost miraculous! In one hour many people—including kids of ten—are able to master the code. The ease of learning gives confidence to beginners who might otherwise drop out.

"THE STICKLER"

6+ WPM—CT7306—This is the practice tape for the Novice and Technician licenses. It is made up of one solid hour of code, sent at the official FCC standard (no other tape we've heard uses these standards, so many people flunk the code when they are suddenly—under pressure—faced with characters sent at 13 wpm and spaced for 5 wpm). This tape is not memorizable, unlike the zany 5 wpm tape, since the code groups are entirely random characters sent in groups of five.

"BACK BREAKER"

13+ WPM—CT7313—Code groups again, at a brisk 14 per so you will be at ease when you sit down in front of the steely-eyed government inspector and he starts sending you plain language at only 13 per. You need this extra margin to overcome the panic which is universal in the test situations. When you've spent your money and time to take the test, you'll thank heaven you had this back-breaking tape.

"COURAGEOUS"

20+ WPM—CT7320—Code is what gets you when you go for the Extra class license. It is so embarrassing to panic out just because you didn't prepare yourself with this tape. Though this is only one word faster, the code groups are so difficult that you'll almost fall asleep copying the FCC stuff by comparison. Users report that they can't believe how easy 20 per really is with this fantastic one hour tape.

"OUTRAGEOUS"

25+ WPM—CT7325—This is the tape for that small group of overachieving hams who wouldn't be content to simply satisfy the code requirements of the Extra Class license. It's the toughest tape we've got and we keep a permanent file of hams who have mastered it. Let us know when you're up to speed and we'll inscribe your name in 73's CW "Hall of Fame."

— General License Study Guide —

new **FROM WAYNE GREEN BOOKS**

GENERAL LICENSE STUDY GUIDE—by Timothy M. Daniel N8RK. This is the complete guide to the General License. Learning rather than memorizing is the secret. This is not a question-and-answer guide that will gather dust when the FCC issues a new test. Instead, this book will be a helpful reference, useful long after a ham upgrades to General. Includes up-to-date FCC rules and an application form. Order yours today and talk to the world. SG7358 $6.95

● **ADVANCED CLASS LICENSE STUDY GUIDE**—Ready to upgrade your license? To prevent retaking the FCC theory exam, you need the *73* Advanced theory guide. SSB, antenna theory, transmitters, and electronics measuring techniques are covered in detail in this easy-to-follow study guide. Special modes and techniques, such as RTTY, are also treated. An engineering degree is *not* necessary to master the Advanced theory—try this book before visiting the examiner's office! (Published by TAB Books previous to recent changes in FCC exam material.) SG1081 $6.95.*

—SSTV TAPE—

● **SLOW SCAN TELEVISION TAPE**—CT7350—Prize-winning programs from the 73 SSTV contest. Excellent for Demo! $5.95.*

FOR YOUR HAMSHACK

● **QSL CARDS**—*73* turns out a fantastic series of QSL cards at about half the cost of having them done elsewhere because they are run as a fill-in between printing books and other items in the 73 Print Shop. 250 Style W—QW0250—for $8.95*; 500 Style W—QW0500—for $13.95*; 250 Style X—QX0250—for $8.95*; 500 Style X—QX0500; 250 Style Y—QY0250—for $8.95*; 500 Style Y—QY0500—for $13.95.* Allow 6-12 wks. for delivery.

● **LIBRARY SHELF BOXES**—These sturdy white, corrugated, dirt-resistant boxes each hold a full year of *73*, *Kilobaud Microcomputing* or *80 Microcomputing*. With your order, request self-sticking labels for any of the following: *73*, *Kilobaud Microcomputing*, *80 Microcomputing*, *CQ*, *QST*, *Ham Radio*, *Personal Computing*, *Radio Electronics*, *Interface Age*, and *Byte*. Order 1—BX1000—for $2.00*; order 2-7—BX2002—for $1.50 each*; order 8 or more—BX1002—for $1.25 each*.



Style Y

Style W

Style X

● Preserve and protect your collection for a lifetime! Order these handsome red binders with gold lettering. $7.50 for 1, 3 for $21.75, 6 for $42.00. (Postpaid within USA, please add $2.50 per order outside USA.) *Check or money orders only, no phone or C.O.D. orders.* **73 Binders, P.O. Box 5120, Philadelphia, PA 19141.**

***NOTE—Above address for Binders only.**

73 MAGAZINE BINDERS

BACK ISSUES

● **BACK ISSUES**—Complete your collection; many are prime collectables now, classics in the field! A full collection is an invaluable compendium of radio and electronics knowledge!

733006	73 BACK ISSUE—BEFORE JULY 1980	$ 3.00
73350	73 BACK ISSUE JULY 1980 THRU OCT. 1981	$ 3.50
73350P	73 BACK ISSUE NOV. 1981 TO PRESENT	$ 3.50
73005	73 BACK ISSUE—5 YOUR CHOICE	$10.75
73010	73 BACK ISSUE—10 YOUR CHOICE	$16.00
73025	73 BACK ISSUE—25 YOUR CHOICE	$27.00
73125	73 BACK ISSUE—25 OUR CHOICE	$14.00

Shipping: **Please add $1.00 per magazine. Orders of ten magazines or twenty-five magazines add $7.50 per order.**

*Use the order card in this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop ● Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All orders add $1.50 handling first book, $1.00 each additional book, $10.00 per book foreign airmail. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address. (Prices subject to change on books not published by 73 Magazine.)

FOR TOLL FREE ORDERING CALL 1-800-258-5473

RADIO BOOKSHOP

THE 73 TECHNICAL LIBRARY



BEHIND THE DIAL—by Bob Grove. Get more fun out of shortwave listening with this interesting guide to receivers, antennas, frequencies, and interference. BK7307 $4.95.*

THE CHALLENGE OF 160—is the newest book in the *73* technical library, dedicated to 160-meter operating. Si Dunn provides all necessary information to get started on this unique band. The all-important antenna and ground systems are described in detail. The introduction contains interesting photos of Stew Perry's (the King of 160) shack. This reference is a must for new and experienced "Top Band" operators. BK7309 $4.95.*

SSB...THE MISUNDERSTOOD MODE—by James B. Wilson. Single Sideband Transmission...thousands of us use it every day, yet it remains one of the least understood facets of amateur radio. J. B. Wilson presents several methods of sideband generation, amply illustrated with charts and schematics, which will enable the ambitious reader to construct his own sideband generator. A must for the technically-serious ham. BK7351 $5.50.*

PROPAGATION WIZARD'S HANDBOOK— by J. H. Nelson. When sunspots riddled the worldwide communications networks of the 1940s, John Henry Nelson looked to the planets for an answer. The result was a theory of propagation forecasting based upon interplanetary alignment that made the author the most reliable forecaster in America today. The book provides an enlightened look at communications past, present, and future, as well as teaching the art of propagation forecasting. BK7302 $6.95.*

TOOLS & TECHNIQUES FOR ELECTRONICS—by A. A. Wicks is an easy-to-understand book written for the beginning kit-builder as well as the experienced hobbyist. It has numerous pictures and descriptions of the safe and correct ways to use basic and specialized tools for electronic projects, as well as specialized metal-working tools and the chemical aids which are used in repair shops. BK7348 $4.95.*

NEW

WORLD PRESS SERVICE FREQUENCIES—by Thomas Harrington Can't wait to hear the evening news, or are you wondering about the news that you *aren't* hearing? Receive by Radio Teletype (RTTY) *all* the world news and financial happenings from the world capitols on a 24 hour a day basis. This book gives you the frequencies and times of broadcast of such news services as AP, UPI, Reuters, TASS, VOA and London Press. Also included is an introduction to RTTY with information on equipment, antennas, abbreviations—everything you need to get started in RTTY. BK1202 $7.95*

NEW

THE NEW WEATHER SATELLITE HANDBOOK—by Dr. Ralph E. Taggart WB8DQT. Here is the completely updated and revised edition containing all the information on the most sophisticated and effective spacecraft now in orbit. This book serves both the experienced amateur satellite enthusiast and the newcomer. It is an introduction to satellite watching, providing all the information required to construct a complete and highly effective ground station. Solid hardware designs and all the instructions necessary to operate the equipment are included. For experimenters who are operating stations, the book details all procedures necessary to modify equipment for the new series of spacecraft. Amateur weather satellite activity represents a unique blend of interests encompassing electronics, meteorology and astronautics. Join the privileged few in watching the spectacle of earth as seen from space on your own monitoring equipment. BK7383 $8.95.*

FOR THE CONTESTER

THE CONTEST COOKBOOK—reveals the secrets of the contest winners (domestic, DX, and specialty contests), complete with photos and diagrams of equipment used by the top scorers. Find out how to make 150 contacts in one hour. BK7308 $5.95.*

INTERFERENCE HANDBOOK—by William R. Nelson, WA6EQG—This timely handbook covers every type of RFI problem and gives you the solutions based on practical experience. Covers interference to TV, radio, hi-fi, telephone, radio amateur, commercial and CB equipment. Power line interference is covered in depth—how to locate it, cure it, work with the public, safety precautions, how to train RFI investigators. Written by an RFI expert with 33 years of experience, this profusely illustrated book is packed with practical easy-to-understand information. BK1230 $8.95.*

IC OP-AMP COOKBOOK—by Walter G. Jung. Covers not only the basic theory of the IC op amp in great detail, but also includes over 250 practical circuit applications, liberally illustrated. 592 pages, 5½ x 8½, softbound. BK1026 $14.95.*

OWNER REPAIR OF RADIO EQUIPMENT—by Frank Glass K6RQ. Here's a book that will teach you an approach to troubleshooting without a shack full of test equipment. Written in a narrative, non-mathematical style, it will encourage you to successfully fix your own rig problems 80 to 90% of the time. Even if you don't want to fix, you can learn a lot about how things work and fail. Add to your library and personal expertise. BK7310 $7.95.*

HANDBOOKS FOR THE HAMSHACK

NEW

THE COMPLETE SHORTWAVE LISTENER'S HANDBOOK, 2nd EDITION by Hank Bennett and Harry L. Helms. This comprehensive volume contains loads of new information from all over the world on the latest developments in SWL technology clubs, associations, practices and stations. A thorough guide to stations of the world by general continental area and frequency is included. BK1241 $9.95

THE TEN METER FM HANDBOOK—by Bob Heil K9EID. This handbook has been published to help the ten meter enthusiast learn more about the many methods of conversions and tricks that are used to make existing units work better. Join the great "tinkerers" of the world on ten FM and enjoy the fantastic amount of fun in communicating with amateur stations worldwide on ten meter FM. BK1190 $4.95.*

THE PRACTICAL HANDBOOK OF AMATEUR RADIO FM REPEATERS—by Bill Pasternak WA6ITF (author of 73 Magazines monthly column "Looking West") This is the book for the VHF/UHF FMer, compiled from material submitted by over a hundred individuals, clubs, organizations and equipment manufacturers. A "must have" for your ham shack shelf. BK1185 $12.95.*

The 73 Test Equipment Library

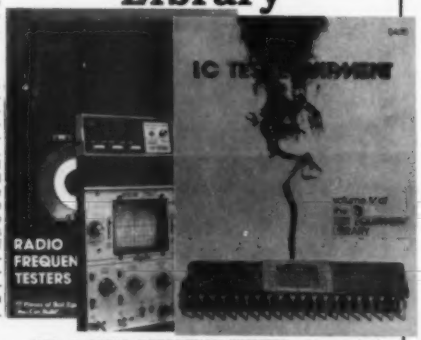

VOL. II AUDIO FREQUENCY TESTERS—Jam-packed with all kinds of audio frequency test equipment. If you're into SSB, RTTY, SSTV, etc., this book is a must for you...a good book for hi-fi addicts and experimenters, too! LB7360 $4.95.*

VOL. III RADIO FREQUENCY TESTERS—Radio frequency waves, the common denominator of amateur radio. Such items as SWR, antenna impedance, line impedance, RF output, and field strength; detailed instructions on testing these items includes sections on signal generators, crystal calibrators, grid dip oscillators, noise generators, dummy loads, and much more. LB7361 $4.95.*

VOL. IV IC TEST EQUIPMENT—Become a troubleshooting wizard! In this fourth volume of the *73* TEST EQUIPMENT LIBRARY are 42 home construction projects for building test equipment to work with your ham station and in servicing digital equipment. Plus a cumulative index for all four volumes for the *73* TEST EQUIPMENT LIBRARY. LB7362 $4.95.*

RF AND DIGITAL TEST EQUIPMENT YOU CAN BUILD—BK1044—Rf burst, function, square wave generators, variable length pulse generators—100 kHz marker, i-f and rf sweep generators, audio osc, af/rf signal injector, 146 MHz synthesizer, digital readouts for counters, several counters, prescaler, microwave meter, etc. 252 pages. BK1044 $5.95.*

*Use the order card in this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop ● Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All orders add $1.50 handling first book, $1.00 each additional book, $10.00 per book foreign airmail. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address. (Prices subject to change on books not published by 73 Magazine.)

FOR TOLL FREE ORDERING CALL 1-800-258-5473

RADIO BOOKSHOP

ANTENNA BOOKS

PRACTICAL ANTENNAS FOR THE RADIO AMATEUR—A manual describing how to equip a ham station with a suitable antenna. A wide range of antenna topics, systems, and accessories are presented giving the reader some food for thought and practical data for construction. Designed to aid the experienced ham and novice as well. Only BK1015 $9.95.*

VHF ANTENNA HANDBOOK—The new *VHF Antenna Handbook* details the theory, design, and construction of hundreds of different VHF and UHF antennas...a practical book written for the average amateur who takes joy in building, not full of complex formulas for the design engineer. Packed with fabulous antenna projects you can build. BK7368 $5.95.*

73 DIPOLE AND LONG-WIRE ANTENNAS—by Edward M. Noll W3FQJ. This is the first collection of virtually every type of wire antenna used by amateurs. Includes dimensions, configurations, and detailed construction data for 73 different antenna types. Appendices describe the construction of noise bridges, line tuners, and data on measuring resonant frequency, velocity factor, and swr. BK1016 $5.50.*

• ALL ABOUT CUBICAL QUAD ANTENNAS (2nd edition)—BK1196—The "Classic" on Quad design, theory, construction, and operation. New 2nd edition contains new feed and matching systems and new data. $5.95.*

• BEAM ANTENNA HANDBOOK (New 5th edition)—BK1197—Yagi beam theory, construction and operation. Information on wire beams, SWR curves and matching systems. A "must" for serious DXers. $5.95*

• VHF HANDBOOK FOR RADIO AMATEURS—BK1198—Contains information on FM theory, operation and equipment, VHF antenna design and construction, satellite-EME, and the newest solid-state circuits. $6.95*

• THE RADIO AMATEUR ANTENNA HANDBOOK—BK1199—All about wire antennas, beams, tuners, baluns, coax, radials, SWR and towers. Clear and complete information. $6.95*

• SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS—BK1200—All new data and everything you want to know about low-cost, multi-band antennas, inexpensive beams, "invisible" antennas for hams in "tough" locations. $6.95*

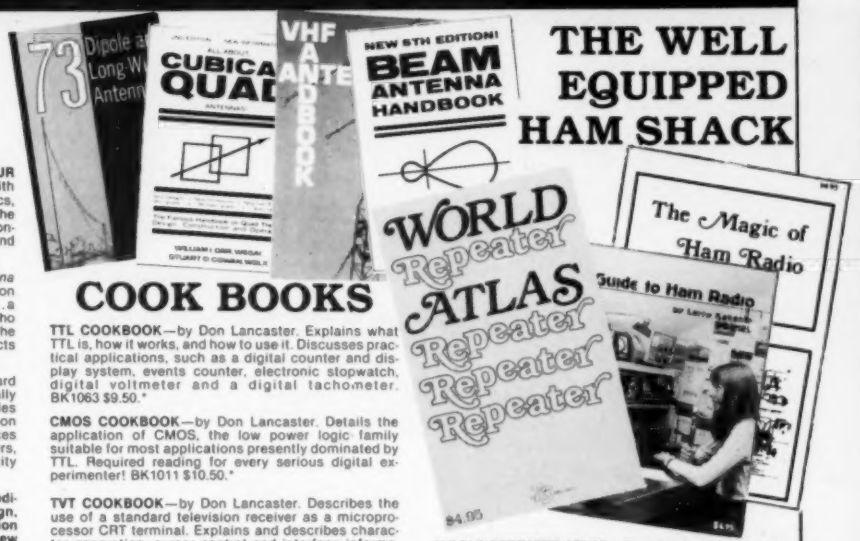

THE WELL EQUIPPED HAM SHACK

COOK BOOKS

TTL COOKBOOK—by Don Lancaster. Explains what TTL is, how it works, and how to use it. Discusses practical applications, such as a digital counter and display system, events counter, electronic stopwatch, digital voltmeter and a digital tachometer. BK1063 $9.50.*

CMOS COOKBOOK—by Don Lancaster. Details the application of CMOS, the low power logic family suitable for most applications presently dominated by TTL. Required reading for every serious digital experimenter! BK1011 $10.50.*

TVT COOKBOOK—by Don Lancaster. Describes the use of a standard television receiver as a microprocessor CRT terminal. Explains and describes character generation, cursor control and interface information in typical, easy-to-understand Lancaster style. BK1064 $9.95.*

SPECIAL OFFER

Chart of UNITED STATES AMATEUR RADIO PRIVILEGES

by class of license, emission type, and frequency from 160 thru 2 meters, including provision for the new 30, 17, and 12 meter bands. This 22 x 28 in. twelve-color chart is the first of its kind to be both informative and decorative. $3.00 value, only $1.95 with the purchase of 1 or more books from the Radio Bookshop. (Supplies limited, order now.) CH7300 $1.95.

WORLD REPEATER ATLAS—Completely updated, over 230 pages of repeater listings are indexed by location and frequency. More than 50 maps pinpoint 2000 repeater locations throughout the USA. Foreign listings include Europe, the Middle East, South America, and Africa. $4.95* BK7315

THE MAGIC OF HAM RADIO—by Jerrold Swank W8HXR begins with a brief history of amateur radio and of Jerry's involvement in it. Part 2 details many of ham radio's heroic moments. Hamdom's close ties with the continent of Antarctica are the subject of Part 3. In Part 4 the strange and humorous sides of ham life get their due. And what of the future? Part 5 peers into the crystal ball. $4.95.* BK7312

A GUIDE TO HAM RADIO—by Larry Kahaner WB2NEL. What's Amateur Radio all about? You can learn the basics of this fascinating hobby with this excellent beginner's guide. It answers the most frequently asked questions in an easy-going manner, and it shows the best way to go about getting an FCC license. A Guide to Ham Radio is an ideal introduction to a hobby enjoyed by people around the world. $4.95.* BK7321

WORLD RADIO TV HANDBOOK 1982, 25TH EDITION—This book is the bible of international broadcasters, providing the only authoritative source of exact information about broadcasting and TV stations world wide. This 1981 edition is completely revised, giving comprehensive coverage of short, medium and long wave. 560 pages of vital aspects of world listening. $16.50. BK1184

• HOW TO DEFEND YOURSELF AGAINST RADAR—BK1201—by Bruce F. Bogner and James R. Bodnar, a lawyer and radar expert. This book gives you the ammunition to challenge the radar "evidence" that usually leads to a speeding conviction. The major part of the book details the inner workings of radar—you'll become more of an expert than most police officers and judges. The remainder of the book outlines how to defend yourself against a speeding ticket—the observations, measures and testimony you must obtain to defend yourself without the help of a lawyer. The price is a lot less than a fine! $6.95*

MICROCOMPUTER BOOKS FROM 73

• SOME OF THE BEST FROM KILOBAUD/MICROCOMPUTING—BK7311—A collection of the best articles that have recently appeared in Kilobaud/ MICROCOMPUTING. Included is material on the TRS-80 and PET systems, CP/M, the 8080/8085/Z80 chips, the ASR-33 terminal. Data base management, word processing, text editors and file structures are covered too. Programming techniques and hardcore hardware construction projects for modems, high speed cassette interfaces and TVTs are also included in this large format, 200 plus page edition. $10.95.*

• 40 COMPUTER GAMES—BK7381—Forty games in all in nine different categories. Games for large and small systems, and even a section on calculator games. Many versions of BASIC used and a wide variety of systems represented. A must for the serious computer gamesman. $7.95*

• THE NEW HOBBY COMPUTERS—BK7340—This book takes it from where "HOBBY COMPUTERS ARE HERE!" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards...and much, much more! Don't miss this tremendous value! Only $4.95.*

• UNDERSTANDING AND PROGRAMMING MICROCOMPUTERS—BK7382—A valuable addition to your computing library. This two-part text includes the best articles that have appeared in 73 and Kilobaud Microcomputing magazines on the hardware and software aspects of microcomputing. Well-known authors and well-structured text helps the reader get involved. $10.95*

ANNOTATED BASIC—A NEW TECHNIQUE FOR NEOPHYTES. VOL 1 & 2—*Annotated BASIC* explains the complexities of modern BASIC. It includes complete TRS-80* Level II BASIC programs that you can use. Each program is annotated to explain in step-by-step fashion the workings of the program. Programs are flowcharted to assist you in following the operational sequence. And—each chapter includes a description of the new concepts which have been introduced.
Annotated BASIC Volume 1 BK7384 $10.95
Annotated BASIC Volume 2 BK7385 $10.95
Order Both Volumes and Save! BK738402 $18.95

HOBBY COMPUTERS ARE HERE!!! If you want to come up to speed on how computers work—hardware and software—this is an excellent book. It starts with fundamentals and explains the circuits and the basics of programming, along with a couple of TVT construction projects, ASCII, Baudot, etc. This book has the highest recommendations as a teaching aid. $4.95.* BK7322

*Use the order card in this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All orders add $1.50 handling first book, $1.00 each additional book, $10.00 per book foreign airmail. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address. (Prices subject to change on books not published by 73 Magazine.)

FOR TOLL FREE ORDERING CALL 1-800-258-5473

List of Advertisers

*Please contact these advertisers directly.

To receive full information from our advertisers please complete the following postage-paid card.

R.S. No.		Page
2	AEA/Advanced Electronic Applications	133
114	ABEX	57
115	*AS ATV Magazine*	143
124	Advanced Computer Controls	125
448	Advanced Communications International	77
406	Alaska Microwave	56
20	All Electronics	47
*	Amateur Electronic Supply	91, 109, 135
6	Amateur-Wholesale Electronics	93
461	Amateur-Wholesale Electronics	131
334	Amidon	41
97	AMP-Letter	143
*	Antenna Bank	89
63	Antenna Specialists	15
71	Applied Invention	51
121	ARCO Solar, Inc.	35
*	Associated Radio	73
*	Atlanta Hamfestival	75
130	Auto Connect	143
469	BG Carl Electronics	50
11	Barker & Williamson	126
26	Bash Educational Services	130
479	Benjamin Michael Industries	119
*	Bilal	119
142	Britt's Two-Way Radio	43
12	Bullet Electronics	142
92	Ceco Communications, Inc.	142
321	Certified International	143
89	Clutterfree Modular Consoles	26
*	Code Quick	142
28	Communications Center, NE	158
382	Communications Concepts, Inc.	140
15	Communications Specialists	38, 39
140	Comstar Research	97
478	Contest Software	120
145	Cover Craft	47
*	Crown Micro Products	43
106	Cushcraft	43, 127
345	Data Service Co.	64
*	Dakota Microwave	50
17	Dielectric Communications	26
144	Digatek Corp.	143
425	Doppler Systems	134
*	R. L. Drake Company	28, 29, 49, 133, 142
*	DX Signal Co.	143
453	E. G. E., Inc.	130
447	Electronic Hobby Innovations	56
146	Electronic Rainbow Ind., Inc.	79
119	Electronictown	129
484	Encomm	119
400	Engineering Consulting	142
85	Faxscan, Inc.	79
439	Ben Franklin Electronics	141
323	Fox-Tango Corp.	45
116	Friedsam TV Hardware	64
149	G & R Design Inc.	131
143	GLB Electronics	129
*	Gilfer Shortwave	73
417	Gotham Antenna	81
132	Grand Systems	141
86	H & R Communications	51
345	Hal Communications	21, 27
31	Hal-Tronix	35
*	Ham Radio Center	145
*	Ham Radio Outlet	3
33	Hamtronics, NY	159
460	Handi-Tek	141
129	Harvey	97
486	Heath Company	117
127	Heil Sound Ltd.	63
320	Hoosier Electronics	50
*	ICOM	Cov. II, 10, 11
474	IIX Equipment	143
480	IIX Equipment	119
*	IRL	94
78	Independent Crystal Supply Co.	141
35	Info-Tech	83
445	Instant Software Amateur Radio Programs	136
27	Iscan Engineering	141
72	JDL Industries	125
25	JJT Distributing	142
38	Jameco Electronics	161
*	KLM Electronics	9
81	KDK Distributing	17
*	Kantronics	109
*	Kenwood	Cov IV, 7, 115
4	Lacue Communications Electronics	131
481	Lance Johnson Engineering	119
475	Larsen Antennas	120
452	Lewis Construction Co.	63
53	Luly Associates	57
482	MCM Communications	120
47	MFJ Enterprises	73, 75, 77, 79, 81, 83
48	MHz Electronics	146-155
77	M-Squared Engineering	45
44	Macrotronics, Inc.	78
45	Madison Electronics Supply	19, 80
46	Maggiore Electronic Lab	81
134	Martin Engineering	83
476	Martin Engineering	120
139	Memphis Amateur Radio	128
49	Micro Control Specialties	110
483	Micro Control Specialties	120
136	Microwave Filters Co.	51
51	Microlog	72
50	Microcraft Corp.	109, 134
52	Mid-Com Electronics	128
*	Mirage	77
*	Monitoring Times	68
*	Mor-Gain	87
123	N & G Distributing	65, 110
318	National Communications Group	130
485	National Communications Group	116
412	Nemal Electronics	140
107	North Coast Microwave	57
137	Nuts & Volts	143
*	*Orbit Magazine*	136
*	P. C. Electronics	126, 131
113	Pacific One Corporation	41
*	Palomar Engineers	4, 119
380	Panasonic	69
404	P. B. Radio Service	45
421	Phillips Tech Electronics	64
500	Pipo Communications	141
96	Power Gain Systems	21
459	QRO Engineering	125
60	Quest Electronics	156
138	RF Products	126
117	RSE Hamshack	80
21	R.W.D., Inc.	80
315	Radio Activity	64
61	*Radio Amateur Callbook*, Inc.	4
397	Radio World	134
105	Radios Unlimited	82
454	Radiokit	131
62	Ramsey Electronics	144, 157
147	Randall Sherman	143
133	Rivendell Associates	125
477	Rivendell Associates	120
54	Robot Research	33
418	Rolin Distributors	41
376	SMP	56
65	S-F Amateur Radio Service	135
333	Sentry Mfg. Co.	125
*	Sherwood Engineering	141
*	73 Magazine Books	111-113, 132, 138, 139, 140
	Dealers Ad	139
	Moving	136
	Subscription	137, 140
	University Microfilm	140
148	Shaver Radio, Inc.	141
*	Simple Simon Electronics	127
433	Skytec	141
*	Spectronics, Inc.	135, 160
68	Spectrum Communications	37
436	Spectrum International, Inc.	133
487	Spectrum International, Inc.	118
69	Surplus Electronics Corp.	140
135	TEM Microwave	57
109	Tennessee Electronics	57
328	Texas Microtronics	63
118	The Blacksburg Group	128
449	The Ham Shack	134
57	The Tuned Antenna Co.	129
76	Trac Electronics	82
104	Trionyx Industries, Inc.	126
88	Tufts Electronics	70, 71
*	Universal Communications	50
*	V-J Products	82
*	Van Gorden Engineering	21
311	Vanguard Labs	140
90	VoCom Products Corp.	47
128	W-F Products	135
302	W-S Engineering	134
79	Wacom Products	75
80	Western Electronics	94
83	Yaesu Electronics Co.	Cov III

73 MAGAZINE

Books, ETC.

To order, complete the following postage-paid card, or itemize your order including detailed credit card information or check and mail to: 73 Magazine/Mail Order Dept./Peterborough NH 03458.

Catalog#	Item	Price
BK1016	73 DIPOLE & LONG WIRE ANTENNAS	$ 5.50
73300	73 BACK ISSUE—BEFORE JULY 1980	$ 3.00
73350	73 BACK ISSUE JULY 1980 THRU OCT. 1981	$ 3.50
73300P	73 BACK ISSUE NOV. 1981 TO PRESENT	$ 3.50
73005	73 BACK ISSUE—5 YOUR CHOICE	$10.75
	Add $1.00 per magazine for shipping	
73010	73 BACK ISSUE—10 YOUR CHOICE	$18.00
73025	73 BACK ISSUE—25 YOUR CHOICE	$27.00
73125	73 BACK ISSUE—25 OUR CHOICE	$14.00
	Add $7.50 per order for shipping	
BK1196	ALL ABOUT CUBICAL QUAD ANTENNAS	$ 5.95
BK1197	BEAM ANTENNA HANDBOOK	$ 5.95
BK7307	BEHIND THE DIAL	$ 4.95
BK7309	CHALLENGE OF 160	$ 4.95
BK1011	CMOS COOKBOOK	$10.50
CT7306	CODE TAPE—5 WPM	$ 4.95
CT7308	CODE TAPE—6 + WPM	$ 4.95
CT7313	CODE TAPE—13 + WPM	$ 4.95
CT7320	CODE TAPE—20 + WPM	$ 4.95
CT7325	CODE TAPE—25 + WPM	$ 4.95
CT7394	CODE TAPES (ANY FOUR ABOVE)	$15.95
BK7308	THE CONTEST COOKBOOK	$ 5.95
BK7361	40 COMPUTER GAMES	$ 7.95
SG7358	GENERAL LICENSE STUDY GUIDE	$ 6.95
BK7304	GIANT BOOK OF AMATEUR RADIO ANTENNAS	$12.95
BK7321	A GUIDE TO HAM RADIO	$ 4.95
BK7322	HOBBY COMPUTERS ARE HERE	$ 4.95
BK7325	HOW TO BUILD A MICROCOMPUTER & REALLY UNDERSTAND IT	$ 9.95
BK1201	HOW TO DEFEND YOURSELF AGAINST RADAR	$ 6.95
BK1028	IC OP AMP COOKBOOK	$12.95
BK1230	INTERFERENCE HANDBOOK	$ 9.95
BK7312	MAGIC OF HAM RADIO	$ 4.95
BK1033	MASTER HANDBOOK OF HAM RADIO CIRCUITS	$ 8.95
BK7340	THE NEW HOBBY COMPUTERS	$ 4.95
BK7383	THE NEW WEATHER SATELLITE HANDBOOK	$ 8.95
CT7300	NOVICE THEORY TAPES	$15.95
BK7310	OWNER REPAIR OF RADIO EQUIPMENT	$ 7.95
BK7305	POWER SUPPLY HANDBOOK	$ 9.95
BK1015	PRACTICAL ANTENNAS FOR THE RADIO AMATEUR	$ 9.95
BK1185	THE PRACTICAL HANDBOOK OF FM REPEATERS	$ 9.95
BK7302	PROPAGATION WIZARD'S HANDBOOK	$ 6.95
QW0250	QSL CARDS—STYLE W—250	$ 8.95
QW0500	QSL CARDS—STYLE W—500	$13.95
QX0250	QSL CARDS—STYLE X—250	$ 8.95
QX0500	QSL CARDS—STYLE X—500	$13.95
QY0250	QSL CARDS—STYLE Y—250	$ 8.95
QY0500	QSL CARDS—STYLE Y—500	$13.95
BK1199	THE RADIO AMATEUR ANTENNA HANDBOOK	$ 6.95
BK1044	RF & DIGITAL TEST EQUIPMENT	$ 5.95
BK1059	RTL COOKBOOK	$ 6.50
BK1000	SHELF BOX—1	$ 2.00
BK1001	SHELF BOXES—2-7	$1.50 each
BK1002	SHELF BOXES—8 AND UP	$1.25 each
BK1200	SIMPLE, LOW COST WIRE ANTENNAS FOR RADIO AMATEURS	$ 6.95
BK7311	SOME OF THE BEST FROM KILOBAUD	$10.95
BK7311	SOME OF THE BEST	$ 7.95
BK7351	SSB THE MISUNDERSTOOD MODE	$ 5.50
CT7350	SSTV TAPE	$ 5.95
SG1081	STUDY GUIDE—ADV. CLASS	$ 6.95
SG1080	STUDY GUIDE—EXTRA CLASS	$ 5.95
SG7357	STUDY GUIDE—NOVICE CLASS	$ 4.95
BK1190	THE TEN METER FM HANDBOOK	$ 4.95
LB7369	TEST EQUIP LIB V1—COMPONENT TESTERS	$ 4.95
LB7380	TEST EQUIP LIB V2—AUDIO TESTERS	$ 4.95
LB7381	TEST EQUIP LIB V3—RADIO EQUIP.	$ 4.95
LB7362	TEST EQUIP LIB V4—IC TEST EQ.	$ 4.95
BK7348	TOOLS & TECHNIQUES	$ 4.95
BK1063	TTL COOKBOOK	$ 9.50
BK1064	TVT COOKBOOK	$ 9.95
BK7382	UNDERSTANDING & PROGRAMMING MICROCOMPUTERS	$10.95
CH7300	U.S. AMATEUR RADIO CHART	$ 1.95
BK1069	VERTICAL BEAM & TRIANGLE ANTNS	$ 5.50
BK7368	VHF ANTENNA HANDBOOK	$ 5.95
BK1198	VHF HANDBOOK FOR RADIO AMATEURS	$ 6.95
BK7370	WEATHER SATELLITE HANDBOOK	$ 2.50
BK1202	WORLD PRESS SERVICE FREQUENCIES	$ 5.95
BK1184	WORLD RADIO TV HANDBOOK	$16.50
BK7315	WORLD REPEATER ATLAS	$ 4.95

READER SERVICE

Please help us to bring you a better magazine—by answering these questions.

A. 73's technical articles are
☐ 1. Too difficult
☐ 2. Just right
☐ 3. Too simple

B. Which statement best describes the number of construction articles in each issue of 73?
☐ 1. Too many
☐ 2. On the average, just the right amount
☐ 3. Not enough

C. Which of the following best describes your feelings about a typical homebrew article in 73?
☐ 1. Easy to understand and build
☐ 2. Challenging, but I could handle it
☐ 3. Very tough, I wouldn't try it
☐ 4. I don't like construction articles

D. What are your hobbies and leisure activities? Check all that apply.
☐ 1. Animal breeding/grooming
☐ 2. Astronomy
☐ 3. Audio/visual entertainment
☐ 4. Aviation
☐ 5. Boating
☐ 6. Cars
☐ 7. Collecting
☐ 8. Community activities
☐ 9. Computers
☐ 10. Cooking
☐ 11. Crafts
☐ 12. Creative arts
☐ 13. Electronics/technological activities
☐ 14. Games
☐ 15. Gardening
☐ 16. Model Building
☐ 17. Photography/cinematography
☐ 18. Sports & outdoor activities
☐ 19. Travel
☐ 20. Other_____

E. What types of advertising (besides ham radio equipment) would you like to see in 73? Check all that apply.
☐ 1. Computer hardware
☐ 2. Computer software
☐ 3. Business products
☐ 4. Consumer products
☐ 5. Travel
☑ 6. Hobby equipment
☐ 7. Other_____

F. How do you like 73's coverage of satellite TV?
☐ 1. Love it, give us more
☐ 2. Some is okay, but you have gone too far
☐ 3. Hate it, try something else
☐ 4. Don't care

G. If you could choose one mode of operating, what would it be?
☐ 1. Two meter FM
☐ 2. Phone
☐ 3. CW
☐ 4. RTTY, SSTV, or other special modes

H. Which one of the following activities do you enjoy the most?
☐ 1. Regchewing
☐ 2. Operating in a contest
☐ 3. Working DX
☐ 4. Building a homebrew project

I. How do you like published reviews of new amateur gear?
☐ 1. I read them and find the information useful
☐ 2. I read them but don't let them influence my buying
☐ 3. I don't read them

J. If you were an editor of 73 you would (check all that apply).
☐ 1. Publish more general interest articles
☐ 2. Include more monthly columns
☐ 3. Print more construction articles
☐ 4. Keep the magazine just as it is now

K. What is your primary source of information about amateur radio equipment? Check one only.
☐ 1. Magazines
☐ 2. Books
☐ 3. Hamfests
☐ 4. Stores
☐ 5. Friends
☐ 6. Other_____

If you are not a subscriber, please circle number 500.

Reader Service: Return this card to receive full information on the products advertised in this issue. Refer to the ad. You will find numbers near the logo of each advertiser. Each represents the advertiser's individual Reader Service Number. Circle the corresponding numbers on the card on this page, include your name, address & zip, and drop in a mailbox. In 4-6 weeks you'll hear from the advertiser directly.

This card is valid until July 31, 1982

If you are not a subscriber, please circle 500

1	6	11	16	21	126	131	136	141	146	251	256	261	266	271	376	381	386	391	396
2	7	12	17	22	127	132	137	142	147	252	257	262	267	272	377	382	387	392	397
3	8	13	18	23	128	133	138	143	148	253	258	263	268	273	378	383	388	393	398
4	9	14	19	24	129	134	139	144	149	254	259	264	269	274	379	384	389	394	399
5	10	15	20	25	130	135	140	145	150	255	260	265	270	275	380	396	390	395	400
26	31	36	41	46	151	156	161	166	171	276	281	286	291	296	401	406	411	416	421
27	32	37	42	47	152	157	162	167	172	277	282	287	292	297	402	407	412	417	422
28	33	38	43	48	153	158	163	168	173	278	283	288	293	298	403	408	413	418	423
29	34	39	44	49	154	159	164	169	174	279	284	289	294	299	404	409	414	419	424
30	35	40	45	50	155	160	165	170	175	280	285	290	295	300	405	410	415	420	425
51	56	61	66	71	176	181	186	191	196	301	306	311	316	321	426	431	436	441	446
52	57	62	67	72	177	182	187	192	197	302	307	312	317	322	427	432	437	442	447
53	58	63	68	73	178	183	188	193	198	303	308	313	318	323	428	433	438	443	448
54	59	64	69	74	179	184	189	194	199	304	309	314	319	324	429	434	439	444	449
55	60	65	70	75	180	185	190	195	200	305	310	315	320	325	430	435	440	445	450
76	81	86	91	96	201	206	211	216	221	326	331	336	341	346	451	456	461	466	471
77	82	87	92	97	202	207	212	217	222	327	332	337	342	347	452	457	462	467	472
78	83	88	93	98	203	208	213	218	223	328	333	338	343	348	453	458	463	468	473
79	84	89	94	99	204	209	214	219	224	329	334	339	344	349	454	459	464	469	474
80	85	90	95	100	205	210	215	220	225	330	335	340	345	350	455	460	465	470	475
101	106	111	116	121	226	231	236	241	246	351	356	361	366	371	476	481	486	491	496
102	107	112	117	122	227	232	237	242	247	352	357	362	367	372	477	482	487	492	497
103	108	113	118	123	228	233	238	243	248	353	358	363	368	373	478	483	488	493	498
104	109	114	119	124	229	234	239	244	249	354	359	364	369	374	479	484	489	494	499
105	110	115	120	125	230	235	240	245	250	355	360	365	370	375	480	485	490	495	500

Name_____

Address_____

City_____ State_____ Zip_____

BOOKS

73 Magazine, Pine Street, Peterborough, N.H. 03458

Please send me the following 73 products:

Qty.	Catalog #	Title	Unit Price	Total

Please allow 4-6 weeks for delivery. Shipping/handling _____
No C.O.D. orders accepted. Total _____
Enclosed $_____ ☐ Check ☐ M.O.
Bill: ☐ AE ☐ MC ☐ Visa

Card # _____ Exp. date_____

Signature _____ Interbank # _____

Name_____

Address_____

City_____

State_____ Zip_____

Shipping and handling charges:
$1.50 1st book, $1.00 each additional book (UPS, use street address)
$10.00 each book overseas airmail

6-82

SUBSCRIPTION

73 Magazine P.O. Box 931 Farmingdale, N.Y. 11737

73 subscribers save 30% off the newsstand price.

☐ New subscription ☐ 1 year $19.97

Enclosed $_____ ☐ Check ☐ M.O.
Bill: ☐ MC ☐ Visa ☐ AE ☐ me

Card # _____ Exp. date_____

Signature _____ Interbank # _____

Name_____

Address_____

City_____ State_____ Zip_____

Canadian—$22.97 1 year U.S. funds only.
Foreign surface—$39.97 1 year U.S. funds only.
Foreign airmail—please inquire.

326B69

73

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT #29 P. O. BOX 326, DALTON MA 01226

POSTAGE WILL BE PAID BY ADDRESSEE

73 MAGAZINE
P.O. Box 326
Dalton, MA 01226-0326

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO 73 PETERBOROUGH NH 03458

POSTAGE WILL BE PAID BY ADDRESSEE

73 MAGAZINE
Subscription Dept.
POB 931
Farmingdale NY 11737

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO 73 PETERBOROUGH NH 03458

POSTAGE WILL BE PAID BY ADDRESSEE

73 MAGAZINE
Att. Mail Order
Peterborough
NH 03458

REVIEW

KENWOOD TR-2500 HAND-HELD

I have been using hand-held two-meter transceivers since 1976. I started out with a Wilson 1405, went to the smaller Wilson MK II, and then saw the advertisement for that "do everything" Yaesu FT-207R. I had to have one!

A few months ago, I saw an advertisement for the Kenwood TR-2500. There was that old feeling again—I had to have one!

I sold my Yaesu at the first opportunity (which didn't take long). Then I called the local radio store and sadly found out that Kenwood was not yet shipping the 2500 (shades of my Yaesu purchase several years before). Both my budget and the Kenwood delivery schedule were not ready for several months. It seemed like forever! I began to wonder if I might have made a mistake. The Yaesu sure had been good. To make a long story short, the TR-2500 finally came.

The first thing I noticed about the radio was its size. It feels like it was made to be carried around. I haven't actually put it next to an Icom IC-2A yet, but that is the size range it is in.

Memory Backup

The lithium-battery memory backup is a pleasant change. No more programming the memories every time I turn it on. Speaking of batteries, the TR-2500 runs quite a long while on a battery charge. Although it's only a 400-mAh pack, the radio is fairly easy on it. I've found myself adopting new battery habits, too. The Kenwood starts flashing its transmit LED when the battery is about depleted (it flashes in the receive mode, too). It's nice to have a few minutes warning before the radio is completely dead. Several minutes is plenty of time to say 73 or to grab a charged battery pack. Now, I just run my battery all the way down and then take the five seconds to slip on a fresh pack; you don't even have to turn the radio off! I suspect the nicads will have a longer life if they are fully cycled.

The TR-2500 program features are super! I don't have to scan all of the band—only the part I am interested in. The audible beeps that sound when a function key is hit are also quite helpful. The auto-resume for scanning is a "have to have" item, and with the ten-channel memory I can store all the frequencies I need. This little radio just about does it all.

The one thing I might have wanted in the TR-2500 was extended frequency coverage for MARS. I mentioned this in the comments section of the buyer questionnaire included with the radio. I was quite impressed when I received an envelope from Trio-Kenwood a week later. It contained a simple modification to allow the TR-2500 to operate in the 141.000- to 150.995-MHz range. Now, that is being responsive to the consumer! A copy of the modification instructions accompanies this review.

The excellent engineering that was put into the TR-2500 is extended also to the optional accessories. The speaker/microphone is sturdy as well as very functional. The clip on the back has already proven useful while working on a local repeater antenna project. I could talk with just a push by my collar, and listen hands-free.

Accessories

The mobile stand is a very attractive accessory, providing both power and battery charging. You can also charge a spare battery. Another example of fine human engineering is the mobile stand's small light that illuminates the radio keyboard; it's even tinted green to match most auto dash lights.

The base stand is equally well thought out. Besides power for the radio, it also provides a fast (one to one-and-a-half hour) charge for batteries. The battery pack has a built-in heat-sensing device that triggers at 40° C. According to Kenwood, this happens when the battery is at a 90% charge. The base stand then automatically switches to a trickle charge rate. If one only wants to trickle charge, this can be accomplished by turning on the charge switch before turning on the power switch.

Kenwood provides threaded holes in the radio case for the belt clip, a wrist strap, and a rubber earphone-jack protector. There are, of course, extra battery packs available, and even an empty battery case for throw-away alkaline batteries.

Just to be fair, I need to list my negative findings.

- The case doesn't impress me as being as sturdy as those of the FT-207R and the previous Wilson radios.
- The squelch sounds a little "soft."
- The speaker doesn't sound quite as good as the Yaesu, probably because it's smaller.

I adapted rather quickly to the differences, though, and now don't even notice them.

Multi-Purpose Radio

This Kenwood TR-2500 is the only two-meter radio I own. At work, I can set it on my desk and listen quietly to what is going on. In the car, I hook up to the outside antenna, with a 25-Watt amplifier between, and it works beautifully. At home, I only need to hook to the outside antenna if I'm trying to hit one of the "far away" machines.

If any of you out there in radio

TR-2500 MARS CONVERSION

The TR-2500 is supplied to operate between 143.000 and 148.995 MHz. Frequency coverage may be expanded to 141.000 to 150.995 MHz.

1. Slide off the battery pack.
2. Remove three small Phillips head screws from the rear cover.
3. Remove four countersunk Phillips screws from the case bottom.
4. Remove the rear case, remove the PTT lever and set aside.
5. Desolder the backup battery top (negative) lead.
6. Remove four small countersunk Phillips head screws, two on each side, securing top to bottom frame halves.
7. Remove two small Phillips screws from the top panel. Use a flat blade screwdriver to pry up the panel. All four knobs will lift with the panel, as well as the black Offset mask.
8. Swing the front away to the right and unplug the speaker and mic lead from the RX TX unit. Do not over extend the flex circuits.
9. Remove the felt insulation sheet from the PLL rear.
10. Carefully desolder D14. Use a low-power, fine-tipped iron and wick material, or a vacuum desoldering machine. Do not pull out the through hole material, burn the PCB, or overheat and lift the foil. Clear the adjacent empty holes and move D14 to this new location. Solder sparingly and do not create a solder bridge.
11. Replace the felt insulation on the PLL unit.
12. Reinstall the PLL assembly. When reassembling, be sure to replace the black Offset switch mask under the top panel.
13. Reverse steps eight through one to reassemble. When resoldering the backup battery (step five), be sure not to short the battery to the chassis or adjacent shielded compartment.
14. The TR-2500 will now operate anywhere between 141.000 and 150.995 MHz, with any split. Please be sure you are authorized to operate out-of-band before transmitting. The display will show a small zero at 151 MHz in the MHz position. All other frequencies will display normally.



TR-2500 MARS conversion (top view).

land have been toying with the idea of trading up to one of the newer hand-held radios or getting a first one, I would strongly recommend taking a look at this year's crop. If the rest of them are anything like the Kenwood, and I suspect they all are very good, you will find them just as capable as their larger counterparts. Try one—you'll like it!

For more information, contact *Trio-Kenwood Communications, PO Box 7065, Compton CA 90224.*

Oscar Staudt WB5GCX
Guthrie OK

NCG 15M 15-METER SSB/CW QRP TRANSCEIVER

At the time that I received the NCG 15M 15-meter SSB/CW QRP transceiver for review, I had just finished reading an enthusiastic review of its predecessor, the NCG 15SB, and I wondered how the 15M would match up to it. I expected an improved model and set out to see if this was the case.

Careful unpacking of the 15M yielded a U-shaped mobile bracket and the necessary hardware to mount the rig under the car dash, a hand-held Hi-Z microphone, a mike hanger with an adhesive backing, a 12-V power cord with a 5-Amp fuse, and the rig with its operating manual.

Features of the NCG 15M

The NCG 15M is housed in an attractive metal cabinet, measuring 9" × 2-5/8" × 8-1/8", and the rig weighs 5-1/2 lbs. On the right side of the front panel is the tuning dial, and just to the upper left of the dial is the three-digit LED frequency readout, displaying the frequency from 0 to 999 kHz in 1-kHz steps. I found the display to be bright enough for most operating situations.

Below the readout are two push-button switches positioned side by side. One activates the "Delta F" (receiver incremental tuning) control and the other is the noise blanker. The blanker does a very effective job of reducing engine noise, and will actually clip the received signal if the engine noise is strong enough.

The Signal/Rf Out meter is located to the left of the readout, and next to the meter is the Delta F tuner. This control will tune approximately ± 4 kHz from the original receiver frequency. A modification is given in the manual to convert the Delta F tuner into a fine tuner for both receive and transmit.

Below the Delta F control is the Hi/Lo Rf output selector and the mode selector. The output selector allows for 10- or 2-Watt operation and the mode switch selects CW or sideband. The transmit indicator LED in the upper left-hand corner of the rig will light when the rig is in the CW mode, whether or not the rig is keyed, which can be misleading. The key jack is on the back panel of the rig.

The antenna input is 50 Ohms, and the power input is 13.8 V dc.

Specifications and Testing Results

The testing results matched or exceeded the specifications given for the NCG 15M. Ratings for carrier suppression and spurious radiation were given at more than 40 dB and less than – 50 dB respectively. Test results showed at least 43 dB for the carrier suppression and – 60 for the spurious radiation. These were single tone tests (not mentioned in the manual). Testing for image emissions showed suppression in excess of 60 dB.

The rating for sensitivity was given as "more than S/N 10 dB at – 6 dB input." Assuming that the input is the rating for the incoming signal (unamplified), this rating is meaningless since the average signal received is – 100 dB or less. Testing results showed more than 10 dB signal/noise at – 108 dB input.

Selectivity for sideband was tested at – 60 dB and was less than ± 3 kHz as rated by the manual. Power out was measured at 10 W PEP high/2 W PEP low for sideband, and 10 W high/2 W low for CW.

On-the-Air Experiences

With 10 Watts PEP fed into a dipole strung in the attic, I was ready to do some sideband operation. I immediately hooked up with KQ4F in Jacksonville, Florida, who reported a signal weak but with excellent audio quality. As the band was on the verge of closing down completely for the evening, this was encouraging news. The next evening brought a variety of contacts on phone; many from the States, a few from South America, and an OH6 from Finland with reports

The NCG 15M transceiver.

ranging from 55-6 to 59. I was amazed at the reports that I was receiving. On sideband, the sensitivity and selectivity of the NCG 15M easily ranks with rigs three or four times the price.

The next day brought some early morning CW operation and I worked five European countries over the space of one half hour, until QRM made conditions impossible. I received excellent signal reports from most of my contacts, but the selectivity on CW was not narrow enough to compete with more than just a light amount of QRM and I was not able to operate as long on CW as I would have liked. This problem can be eased with the installation of any good-quality audio filter.

The main question: How does the NCG 15M perform running mobile? The results were excellent. Using a Firestik CB antenna and an antenna tuner, I went out one afternoon and managed to make 7 contacts with this less-than-optimum antenna arrangement. I have spoken with several hams in the midwest who have worked better than 40 countries with the NCG 15M and a Hustler antenna while driving to work.

Several NCG 15M owners whom I have been in contact with have converted a top-loading CB antenna into a 15-meter antenna with a good deal of success. It's a simple conversion:

Loosen the set screw on the upper part of the coil on the top-loading antenna and remove the whip (approximately 1 foot). Obtain another whip at least 2-1/2 feet long. This will replace the original whip. Trim this whip in 1/4-inch increments until an optimum match is obtained. The result is a broadband 15-meter antenna which costs about $15-$20 and about 30 minutes of your time. I was quickly inspired to do my own conversion and have already worked several countries running mobile QRP.

I was pleased to find that there was a protection circuit for the transistor finals built into the rig; the power out drops substantially with high swr. I had ample opportunity to check this out with my first mobile antenna installation!

The only real fault that I found with the 15M is the backlash in the main tuning. The main tune is not too difficult to use when the radio is in the shack, but it makes mobile operation a real challenge. The manual gives instructions on how to convert the Delta F control to a fine tune to compensate for the rough main tuning. This works well since the fine tune follows the main tune in step, i.e., if the fine tune is 4 kHz off from the main tune, and the main tune is set to a new frequency, the fine tune will still be 4 kHz off from the new main-tune frequency.

Conclusions

The NCG 15M was a real pleasure to use. The sensitivity for both modes and selectivity on phone were comparable to many transceivers sold at more than three times the price of this $300 rig. Although a little more expensive than the NCG 15SB, the 15M matches up to any area—and its tuning system is far superior.

For those who have been thinking about 15-meter mobile or just plain QRP work, you will

find this rig to be well worth the money. It has provided me with hours of enjoyable low-power operation which I hadn't thought possible. It has much of the sophistication of more expensive rigs, yet is simple to operate. The NCG 15M is an outstanding value any way you look at it.

For more information, contact *National Communications Group, 1275 N. Grove St., Anaheim CA 92806.* Reader Service number 485.

Bryan Hastings KA1HY
***73 Magazine* Staff**

HEATHKIT SA-5010 KEYER

In case you haven't noticed, Heathkit® has taken a renewed interest in producing amateur radio equipment. In fact, it could be said that the gang in Benton Harbor is more than making up for lost time—in quality, as well as quantity. What's most interesting is that the new products are obviously designed by hams, for hams. Heath didn't just call up their engineers in the stereo and computer department and say, "Hey fellas, whip us up some ham gear when you get a chance, okay?" No, these products were *planned.* To see what this latest generation of Heathkit ham gear is like, *73* obtained a μMatic memory keyer. The following is what I discovered.

The Features

The μMatic keyer is a compact unit measuring 4-1/8" wide, 6" deep, and 1-5/6" high. It weighs in at a hefty 1 lb. 14 oz., thanks to a cast aluminum base. It requires 11-16 V at 200 mA, and an optional wall transformer is available. There should be no keying problems with most transmitters, since positive keying at 250 V at 100 mA and negative keying at −200 V at 40 mA are accommodated. There are separate phono jacks for positive and negative keying on the rear panel, so no internal wiring changes are needed when switching from, say, an Icom 730 to a Kenwood 520S.

A set of removable capacitive touch paddles plugs into the front of the unit, and a keyboard-entered command swaps the inputs for left-handed users. When the paddles are not in use, they can be safely stored in a slide-out tray in the keyer base. A jack is provided on the rear panel for those who prefer external paddles.

All commands are entered via the 22-key flush-mount membrane keyboard, which sports 10 numeric and 23 single-function switches. Pressing the "TUNE" switch, for example, locks the output and sidetone on until another button is pressed or a paddle is touched. Speed is keyboard-selectable from one to 99 wpm, and weighting and spacing are variable. If the user attempts to enter an incorrect command, the sidetone emits a distinctive dual-pitched warble.

Rounding out our tour of basic features is a built-in sidetone and speaker with trimpot-adjustable volume and pitch. While it is not possible to completely silence the sidetone with its volume control (helpful when using a rig with its own sidetone), plugging a dummy plug into the rear-panel headphone jack accomplishes the same thing. Since I can't imagine ever wanting to plug a headphone into the keyer, I'll probably replace the jack on our unit with a miniature SPST switch to turn the sidetone on and off.

Thanks for the Memories

There are up to ten buffers for storing text or commands. The buffers are soft-partitioned and will hold a total of 240 characters. The ability to store commands as well as text in memory permits such luxuries as automatic speed changes and programmed pauses in buffer-stored messages. A repeat key which allows a message to be sent up to 10 times helps make the most of available memory. Memory contents and last-selected speed, spacing, weighting, and repeat count are retained with an internal battery backup circuit whenever the unit is disconnected from its power supply. The three miniature S-76 batteries are claimed to last about a year (and longer if the keyer is left connected to power most of the time).

Like several other keyers, the μMatic does not load in real time. If you pause for several seconds between words, only a normal wordspace will be inserted in the memory. If the P/C key is pressed while loading a buffer, the keyer will pause at that point when sending the message, allowing you to insert serial numbers, reports, or other text with the paddles. When less than 20 characters of memory space are left, the μMatic warns its user by dropping its sidetone pitch considerably. When it runs out of space completely, the μMatic gives a warning warble, stores the last character entered, and returns to the normal mode.

Heath has included a couple of innovations in error correction to simplify buffer loading. Characters longer than six dots and dashes are simply ignored. If several or more dots are sent, the computer not only ignores the character, but deletes the previous character from the buffer as well. This is one of the best error-fixing routines I have seen.

Code Practice Mode

For the ham seeking to improve his or her ability to copy code, the μMatic keyer includes a very sophisticated code trainer. It sends random code groups in your choice of letters only, letters and numbers, or letters, numbers, and punctuation. We won't go into the details here. Suffice it to say that there are 6400 different yet repeatable practice sequences available. Since you work at any speed you wish, and there are too many sequences to memorize, I judge the μMatic to be superior to cassettes as a learning tool.

Inside the μMatic Keyer

Our kit-builder took 11 hours working at a leisurely pace to finish the kit, and reported only a couple of minor problems in construction and no errors in the manual. The μMatic was rated as an enjoyable and very easy-to-build kit. Virtually all of the circuitry is on the single main board which, in the Heathkit tradition, is silk-screened with component values, placement, and polarities. It's pretty hard to install a part incorrectly! There is a second small board which holds the status LEDs and their dropping resistors. Building is greatly simplified by the 22-switch keypad which connects to a socket on the main circuit board with a ribbon cable. All ICs are socketed, and there are ample warnings about the dangers of static electricity while handling delicate CMOS packages.

Problems? The final case assembly is not quite up to the elegant standard set by the rest of the unit. The military precision found everywhere else is inexplicably lost here. Specifically, the small LED status display board is merely stuck to the top panel with double-sided adhesive tape. Two standoffs designed to keep the board level

The Heathkit SA-5010 μMatic Keyer. (Photo by KA1LR/4)

unfortunately also keep the LEDs in our sample from going as deep into their mounting holes as they should, which causes the display to be rather dim. And because of the number and thickness of wires going to the LED board and the rear panel switches, the two case halves must be forced together during assembly. One always wonders exactly which components are taking the strain of such force. I would prefer a more reassuring mounting scheme here for no other reason than peace of mind. Also, the leads of the main five-volt regulator were too short to plug reliably into the connector provided, no matter how they were bent or cajoled. Rather than risk a flaky connection to this vital component, our builder elected to discard the socket and solder directly to the leads.

Fortunately, none of these problems affected the reliability or usefulness of the keyer. I submitted it to a rather severe torture test, dropping it several times, and banging it repeatedly and forcefully on various hard surfaces. No problems appeared.

Actually, I anticipate that the μMatic will be a highly reliable product. One reason is its impressively low parts count. Control is provided by a custom 3870 single-chip microprocessor and ROM package, clocked with a 3579.545-kHz crystal. Two CMOS 5105 RAM chips store the buffer contents and command functions. A fair percentage of the unit's parts are devoted to the sophisticated power and backup-power switching circuitry, which includes an automatic shut-off feature. Bypass capacitors are used liberally at any point where there is potential rf leakage, and the power input circuit is protected against reverse polarity. Importantly, all components (including the two voltage regulators) run very cool.

In Use

Obviously, Heath has had the benefit of being able to examine several earlier generations of memory keyers. They did their homework well, and have solved just about every problem that cropped up in them. For example, the ability to correct errors while loading text into a buffer is very helpful, as is the CMOS memory and its battery backup. I still get a kick out of plugging the keyer in after a couple of weeks without use, and finding our painstakingly-entered messages still there!

A great deal of thought seems to have gone into the means of accessing the keyer's features. Manufacturers of memory keyers are currently divided into two camps: those who favor a separate switch or knob for each function and others who use a universal keypad, with which we enter numeric codes to accomplish specific tasks. I tend to favor the keypad system, although I sympathize with hams who have a hard time remembering the codes for specific functions. Heath's approach was to take the best of both worlds, bypassing each method's weaknesses. The μMatic has the precise resettability of keypad units coupled with the ease of use of the knobs and switches brigade. And for hams who still get confused from time to time, there is an easy-to-understand operating guide on the bottom of the unit.

One question frequently asked is, "How do you like the capacitive touch paddles?" Well, I really didn't expect to like them, but was pleasantly surprised when the kit was finished. They aren't bad at all. They are infinitely superior to the paddles that were attached to Heath's earlier keyers. I still prefer a good pair of mechanical paddles (like our trusty Bencher), but in many situations, the touch paddles are a welcome feature. With the paddles stored in their little tray, the μMatic is so portable that it can often be found in the glove compartment of my rolling ham shack. I suspect that many hams will be satisfied with the simplicity and portability of a self-contained unit like Heath's SA-5010 μMatic keyer.

I am especially pleased to see attractive, state-of-the-art equipment available from Heathkit, and at the price of $97.95, building the μMatic keyer is truly worthwhile!

For more information contact the *Heath Company, Benton Harbor MI 49022.* Reader Service number 486.

Paul Grupp KA1LR/4
Casselberry FL

MMS 2 ADVANCED MORSE TRAINER

The Morse Talker by Microwave Modules (reviewed in January, 1982) was quite an amazing box. It sent randomly generated code characters and then, using a speech synthesizer, read back to you what was sent.

Well, these folks have managed to go one step further with their new Advanced Morse Trainer, model MMS 2. This new version of the Morse Talker not only tells you what it sent, it tells you what *you* sent as well. Hook up a key and send to the Trainer. After one, five, or fifty characters you will be told what you sent and how fast you sent it. The MMS 2 has all the other features of the Morse Talker except for a different, and to my mind more useful, speed range of 6 to 32 wpm rather than 2 to 20 wpm.

The unit can handle speeds in excess of 40 wpm. The speed readout, which is also voice-synthesized, says "20 wpm" no matter how much higher the speed may be. The MMS 2 recognizes only letters and numerals; if you try to send it punctuation, you will be awarded with the best Bronx cheer this side of the polo grounds.

Although the ability to check sending accuracy might seem like an important one (particularly if you've spent some time recently listening to the CW segments), in use, the MMS 2 leaves something to be desired. It's not that it doesn't copy well—it copies *too* well. The Morse Trainer was able to copy CW that I wouldn't put on the air. It was able to copy even my palsied bug sending, and that's a fist I wouldn't let even a Novice hear!

The CW decoding algorithm used in the MMS 2 would be ideal in a Morse reader, but is entirely too forgiving to serve as a critical sending evaluator. An experienced ham's ears do a much better job.

All in all, the Advanced Morse Trainer represents a significant leap forward in technology. Whether it's a useful leap is another question.

The price class of the Advanced Morse Trainer is $295. For further information, contact *Spectrum International, Inc., Box 1084S, Concord MA 01742.* Reader Service number 487.

John Ackermann AG9V
***73 Magazine* Staff**

HAM HELP

Does anyone have a manual or schematic for an Andrea Radio Corporation Model R-395-PRD-1 World War II direction-finder?

Stan Richardson AC5A
PO Box 65
Flynn TX 77855

I would like to hear from anyone who can help me increase the selectivity and dynamic range of my DX-302 shortwave receiver.

Rob Leonard
Len's Ave.
Dayville CT 06241

I wish to thank all the hams who responded to my request in Ham Help and who did not furnish a return address in their reply! I still need service manuals for the following:

- a model DO-16-N GE low-band base station
- a GE "TPL" low-band mobile manual, #LBI-3407
- a GE "TPL" noise-blanker adapter, model 4EZ14B10 Rev. C
- an ac "Spark Plug," model CVT-1 (a.k.a. Delco Achieverfone)
- a Utica "Uticom" base station
- a Motorola P33AAM-1001AM manual, #68P81005A4OE

I also need the following:

- an rf amp and mixer board for a Pye Cambridge type FM 10D, "A" or "B" band
- a control head and cable for a GE MASTR II (6 or 8 freq.)
- Motorola NU-138 nicad or NU-140 ac power supplies for the old "P31-P33" series HTs

I am willing to pay a reasonable cost for any of the above.

Barry Fuerst
218 Flournoy St.
Oak Park IL 60304

I am interested in becoming a member of Army or Navy MARS and would be very interested in hearing from anyone who could supply me with details about joining.

Robert Cann W4GBB
1060 Lochwood Dr.
Richmond VA 23233

NEW PRODUCTS

GINPOLE

The IIX GP-81 ginpole features all welded construction, full zinc plating, and is designed to fit all popular tower sizes. A kit version (buyer purchases a pipe locally) costs $129.50, while the complete assembly sells for $159.50. These antenna accessories and further information are available from *IIX Equipment, PO Box 9, Oak Lawn IL 60456; (312)-423-0605*. Reader Service number 480.

MICRO-CONTROLLED TRANSCEIVER

The Santec ST series of radios (both the 2-meter and the 440-MHz versions) are the first units to incorporate digital clocks within the radio's control program. The ST offers 10 memories to store both frequency information and the transmitter offset for repeater operation. Bandscan is handled by a manual mode for single stepping, a search mode which automatically finds the first busy frequency, and a scan mode which steps through the band, pausing at each busy channel to monitor the conversation.

The ST-144/uP provides MARS/CAP frequency coverage down to 142.000 MHz and up to 149.995 MHz. There are three selectable power levels: 100 mW, 1 W, and a full-rated 3.5 W. A large liquid-crystal display and a 16-key control pad are among some of the other ST-144 features. The two-meter version lists for $359. For more details, contact *Encomm, Inc., 2000 Avenue G, Suite 800, Plano TX 75074*. Reader Service number 484.

Encomm's Santec ST series of micro-controlled transceivers.

24-HOUR WALL CLOCK

The Benjamin Michael Industries Model 973A clock features quartz accuracy and a 12" dial for excellent visibility. A unique dial face helps to eliminate interpretation errors often associated with 24-hour clocks, and battery operation eliminates the need for a power cord. The Model 973A clock lists for $59.95. For more information, contact *Benjamin Michael Industries, 65 E. Palatine Rd., Suite 105, Prospect Heights IL 60070; (312)-459-5760*. Reader Service number 479.

The Benjamin Michael 24-hour clock.

AUTOMATIC SWR METER

Palomar Engineers introduces the new M-827 swr meter. This new meter computes swr automatically and displays it on a light bar. A second light bar displays power.

The frequency range of the M-827 swr meter is 1-30 MHz. Power ranges are 20, 200, and 2000 Watts. The swr scale is 10:1 with a logarithmic response. The M-827 swr meter sells for $97.50. For further information, write to *Palomar Engineers, 1924-F W. Mission Rd., Escondido CA 92025.*

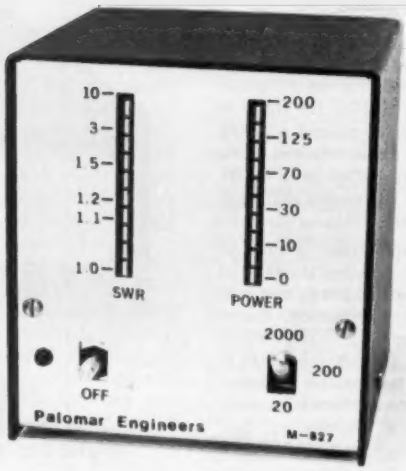

The M-827 swr meter from Palomar Engineers.

The Lance Johnson Engineering GP-1.

GROUND PLANE BUSS

Lance Johnson Engineering has developed the GP-1, a 24-point buss that allows you to connect a large number of radials to the base of your antenna in a neat and efficient manner. The cast "alumaloy" disk attaches to masts up to 2 inches in diameter and has a convenient opening for feedline routing. The GP-1 is priced at $24.95 and is sold by Lance Johnson Engineering. For more information, contact *Lance Johnson Engineering, PO Box 7363, Kansas City MO 64116*. Reader Service number 481.

COMPACT ANTENNA

Bilal Company now offers the Isotron 15. It will cover the complete 15-meter band and maintain a 2:1 or less swr. The Isotron 15, which handles the legal power limit, is supported on a single length of tubing, giving the antenna a total length of 21 inches. The principle of operation is similar to that of the 80-, 40-, and 20-meter models. The Isotron 15 sells for $32.95. For more infor-

mation, contact *Bilal Company, S.R., Florissant CO 80816.*

TOWER AID

The Hazer is an antenna tower accessory which follows the tower and carries the antenna. When desired, the Hazer is lowered to the ground, allowing antennas to be repaired or replaced. By means of a winch, the Hazer is elevated to the top of the tower.

The Martin Hazer is made of 6160 aluminum and is designed for the Rohn 25 tower. It comes complete with winch, cable, hardware, and instructions. Priced at $359.95, the Hazer is available from Martin Engineering. For more information, contact *Martin Engineering, Box 253, Boonville MD 65233; (816)-882-2734.* Reader Service number 476.

The Hazer from Martin Engineering.

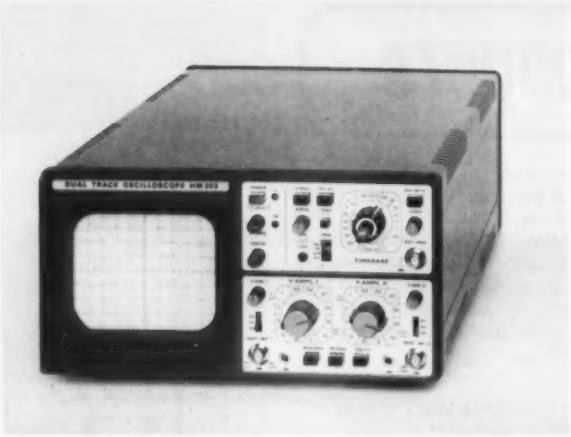

Hameg's dual-trace oscilloscope.

20-MHZ SCOPE

Hameg has started to distribute the HM203, a 20-MHz dual-trace oscilloscope. The 203 features 5-mV/cm to 20-V/cm vertical sensitivity, 18 calibrated sweep speeds, a ×5 sweep magnifier, and external triggering.

The HM203's compact size, 28 × 14 × 38 cm, makes it suitable for either home or field applications. Accessories include a component tester and carrying case, while two ×1/×10 probes are included in the purchase price. The HM203 has an introductory price of $529 and is manufactured by Hameg, Inc. For more information, contact *Rivendell Associates, Warner Hill, Derry NH 03038; (603)-434-5371.* Reader Service number 477.

ELECTRONIC KEYER

Daiwa has introduced a precision electronic keyer, the DK210. Features include semi-automatic, automatic, and tune modes, as well as dot/dash memories. An LED speed indicator gives an instant readout of the DK210's 8- to 50-wpm capability. There are two types of solid-state keying outputs to suit almost any transmitter. A variable-frequency sidetone monitor is also included.

The keyer is available without the speed indicator as the Model DK200. The suggested list price for the DK210 is $99; for the DK200, $82.50. For more details, write or call *MCM Communications, 858 E. Congress Park Dr., Centerville OH 45459; (513)-343-0031.* Reader Service number 482.

CONTEST-LOGGING PROGRAM

Compu-Log, a fully-computerized logging system, offers a printed, scored, and duped log, complete with dupe sheet. Confirmation of contacts can be printed on address labels in alphabetical order by callsign, for attachment to your QSL cards. In addition, many valuable contest and operator statistics can be printed.

Compu-Log is written for the TRS-80 Model I with 48K memory, at least one disk drive, and the Epson MX-80 printer. Modified versions for other printers and the TRS-80 Model III can be created. Versions of Compu-Log for the *CQ* Worldwide DX Contest and ARRL DX Contest are available now. Compu-Log sells for $69.95. For more information, contact *Contest Software, Peter Chamalain W1RM, Savarese Lane, Burlington CT 06013.* Reader Service number 478.

REPEATER POWER AMPLIFIER

A new line of continuous-duty power amplifiers for repeater service has been introduced by Micro Control Specialties. Three different models in the new PA-75 series serve the popular repeater frequencies of 144-148, 220-250, and 420-450 MHz.

Each model in the series provides 75 Watts output with 10 to 15 Watts of drive from a repeater or base station. The PA-75 also includes a 3-section harmonic filter, ac power supply, front-panel fuse access, and metering in a rack mount package.

The two-meter version of the PA-75 has a suggested retail price of $580. For more information, contact *Micro Control Specialties, 23 Elm Park, Groveland MA 01834; (617)-372-3442.* Reader Service number 483.

MOBILE RADIO MOUNT

Larsen Antennas' QUIK-Change radio mount system allows interchangeable use or easy removal for protection against theft. Transfers take only minutes and radio malfunctions can be checked quickly with replacements installed in any vehicle equipped with the Larsen mount.

There are no manual connections—just a simple latch release that disconnects the positive power lead, then the ground, speaker leads, and antenna connection. Reinsertion connects the positive power last to protect the radio. The QUIK-Change radio mount has a suggested user price of $42.00.

For more information, contact *Larsen Antennas, PO Box 1799, 11611 NE 50th Avenue, Vancouver WA 98668.* Reader Service number 475.

The Daiwa DK210 electronic keyer.

W2NSD/1
NEVER SAY DIE
editorial by Wayne Green

from page 8

real technical entry exam has nothing to do with opening any floodgates for CBers. . .it has to do with closing the gates to people who want to cheat to get in. . .with the connivance of Dick Bash and his theory bypass system. This is *supposed* to be a technical hobby.

I sympathize with hams who are all wrapped up with the code. I think that operating CW could easily be far more important if the code were made into an accomplishment of honor. I'd like to see a code-copying contest at every hamfest and convention, with certificates for the shack wall to prove competence. Then we could really be proud of such an ability. Then it would be worthwhile to practice and get good at the code. There is little honor in doing something you *have* to do.

Getting back to the teenagers . . .how are we going to get them involved with amateur radio? Will it help if we bring groups of them into some of our better ham shacks and expose them to the hobby? That, along with a shortwave radio, got me hooked. You know, someone not long ago dug out one of my SWL cards from the late 30s and sent it to me. Yup, I had a ball sending out SWL cards to some of the hams I heard on 20m. . .and had a fair collection of cards built up. Someone stole the box of them not long ago. . .probably for the old stamps on them. I suppose I shouldn't beef, for almost everything of any value that I've owned or has been handed down to me has been stolen by now long-gone employees. That's one of the drawbacks of living at work, I suppose.

What has worked for you in getting teenagers interested in hamming? So few have come into the hobby in the last twenty years that we may have to really dig back into our memories to remember what magic turns an annoying kid into a bothersome young ham. If you have any ideas, please pass them along so that we can spread the news. We are in desperate need of a whole new generation of hams and might as well get started with it.

I had the fun of going back to that old W1CUN ham shack right after WWII and setting up there for the summer of '46 with my own station. We didn't have any power at the farm. . .still don't to this day. . .so I had to find a place to set up where there was power available. I also inherited a bunch of Harry's old *QST*s from the 30s. Lost them at *CQ* when I got fired and they refused to give 'em back. They still have 'em.

Bethlehem has almost faded away. The thousands of summer visitors of the 20s and 30s began to stay away in the 40s and 50s, finding more exciting places to go for vacations. Now it's Europe and the Caribbean, not Bethlehem. Most of the hotels are gone and the rooming houses boarded up. The old Colonial theater is still there. . .reminding me of when I had a season pass for it every year which I got from the owner, Jack Eames. Now *there* was a chap to know. . .with his houseboat on Partridge Lake, his Chris-Craft boat, and camp. It seemed like he owned half of nearby Littleton. I used to walk my bike up to Bethlehem to see the movie. . .get a sundae at Parker's Drug Store and then ride all the way back down the hill the three miles to the farm on my bike—no hands.

When I see some of the old movies on television, it reminds me of those days. Now Harry is gone. . .his mother Mamie and Johnny Macauley are gone and the Valley View is there, but with a new name. I drive by every now and then to look at our old ham shack. It's still there, looking not much different than it did 50 years ago when I had my first introduction to hamming. I don't dare stop for a meal. That would be too much for me. . .bringing back memories of Mamie's fantastic pies and Johnny's great cooking.

COPING WITH EMERGENCIES

Whenever we want to justify our interest in amateur radio, we have only to consult the rules and regulations (97.1) to see how we measure up. I'm a firm believer in paying for my share of what I enjoy. . .and I expect others to similarly pay up.

One way that every amateur can help pull his (or her) share of the load has to do with helping in emergencies. 97.1a: "Recognition and enhancement of the value of the amateur service to the public as a voluntary noncommercial communication service, particularly with respect to providing emergency communications."

Before you and I are going to be of much help in emergencies, we are going to have to recognize some fundamental factors. First, we aren't of much value all by ourselves. To be of value, most of the time we must cooperate and coordinate with others. Then we must prepare for emergencies. This means both with the needed equipment and supplies, and with personal training experience.

The main interest of the Amateur Radio Subcommittee of the National Industry Advisory Committee (NIAC) is with developing our capabilities to cope with emergencies. At the most recent meeting, in late March, I reported on the development of emergency communications plans. It's a rather long report, but since the report needed to be able to stand by itself without reference to past reports or other literature, and since it had to be understandable to nonamateurs, there was no way to cut it down without a possible loss of understanding.

Before I get into a discussion of the ways amateur groups can get started in developing emergency communications capabilities, I'll let you read the report. That should explain what I have in mind. . .and give you a good idea of where we are right now and where we are heading.

REPORT:
National Industry Advisory Committee
Amateur Radio Subcommittee
(March 26, 1982)

Emergency Organization Plans

Amateur radio has been only a slightly tapped resource to help our country cope with emergencies. If we are going to take better advantage of this enormous resource, we must consider a wide variety of factors. We should objectively view the present situation of the hobby with respect to growth, capabilities, and ways of coordinating this diverse group for more effective dealing with emergencies. Perhaps even more important is for us to envision a possible and probable future emergency communications goal and help amateur radio work toward this goal.

Before looking into the future, let's see what can be done in the present to lay the foundation for both a short-range improvement in the ability of amateurs to cope with emergency situations and for the world of 1990 and perhaps 2000. With an estimated 200,000 amateurs with communications capability, there is much we can do to step up our ability to provide emergency communications.

I propose that the coordination of emergency communications systems be done by amateur radio and repeater groups. Individuals are seldom of value in emergencies, except as they are able to cooperate with others to provide a system or network to solve communications problems. Thus it seems natural for us to turn to our already organized amateur radio groups. There are over 3,000 clubs listed in the *Callbook* as licensed, plus approximately 5,000 repeater groups with an unknown overlap on the clubs with licenses. This is more than adequate for the development of an effective communications system.

The first step, I suggest, is to acquaint these groups with the scope of their responsibility. Clubs, like individuals, tend to take the path of least resistance, so unless plans are developed and made clear to them, along with their responsibility for cooperation, most groups will tend to ignore their potential and continue unchanged.

There is much this committee can do to provide these amateur radio groups with information and inspiration. They will want to have an understanding of the various types of emergencies and how they should best cope with each. They will want guidance and leadership on a chain of command in various types of emergencies. It became obvious at the recent NIAC Executive Committee meeting that none of the NIAC subcommittees is clear about this business of knowing exactly who is in command in emergency situations.

Speaking of the other NIAC subcommittees, I must say that it was quite clear that there was a high spirit of cooperation from all of them shown at the Executive Committee meeting. This is most important since it is amateur radio which is perhaps the only common denominator. It will be up to us amateurs to set up and coordinate communications not only with other amateurs, but between many of the other radio services. If you think of this in terms of a true national emergency such as a nuclear attack, this is an awesome responsibility. Yet there is no other radio service which could even hope to cope with a situation of this magnitude.

As a first step, I propose that our committee set goals for amateur radio groups which can be attained immediately. This would include the setting up of a chain of member-to-member communications which would enable each group to assemble, either over the air or in person, for direction. Then there would be an inventorying of emergency equipment and supplies to prevent confusion when these are suddenly needed. Groups should know what they have available in hand transceivers, in emergency power units, in shortwave transceivers, in portable antennas, in

mobile equipment, in supplies of fuel and food, scanners, radios for communications with other services, and so forth.

These groups should perhaps initiate contact with other local radio users such as two-way, CB, doctors, etc. Plans can be made with local radio and television stations for the possible feeding of information or command directions, should that be necessary.

It is in looking toward future communications techniques that we begin to see some of the almost unbelievable possibilities which open to amateur radio. The current interest in digital electronics lays open for us not only high speed error-free digital communications, but also exciting developments in automatic identification of stations along with selective calling via computer-controlled receivers. Microelectronics enables these circuits to be put on a chip a fraction of an inch square.

If these technical developments can be made, we can see emergency communications systems of the future with individual operators typing messages into tiny handheld digital typewriters. These gadgets would be plugged into our radio transceivers, allowing network control stations to automatically poll each of the stations in the group for messages. The messages would then be sent at about 6,500 words per minute with an error-correcting code and passed along by computer to the addressee, whether that be via a repeater, direct, or even via a shortwave link to some other part of the country.

An encoding of the words in the message, again all done electronically via a microelectronic chip, would enable messages to be sent at about 26,000 words per minute and to be received (or sent) in any language. Indeed, there are many exciting technological developments ahead which radio amateurs could invent and pioneer . . . if. As things stand at present, the probability of these developments being made seem sadly remote. There are two major changes which need to be made before we can expect to see amateurs again stepping to the front in pioneering new modes of communications.

The first obstacle is an easy one to surmount, the second is formidable. First, we must have the full cooperation of the FCC to again allow amateurs to experiment freely and without the restrictions which have forced us to stay many years behind the cutting edge of communications. Amateurs have shown, time and again, that they are well able to be self-determining. This preventing of experimentation and pioneering over the last few years has not been in the interests of either amateur radio or our country.

It has been so long since radio amateurs provided any new modes of communications that many amateurs today are unaware of our proud history. When I went into commercial television in 1948, I found that many of the people in the industry at that time were "graduates" of the amateur television station in Long Island City. With all due respect to RCA and their early television broadcasts, much of the innovative studio work and programming development was carried on by amateurs.

At about the same time, I became involved with Jack Babkes W2GDG and his pushing of something called narrowband FM. A number of us built the simple modulator to use this new type of phone and found that it worked. NBFM is now the standard for most VHF communications.

Again at about the same time, John Williams W2BFD was experimenting with amateur radio Teletype® communications. This was restricted to two meters at the time; it took many years to overcome the objections of the ARRL and the FCC before it was allowed to be used on the shortwave bands. The experimental two-meter RTTY repeater set up by W2BFD was forced off the air by the FCC. But before the repeater was silenced, it proved that amateurs within a hundred miles of New York could all communicate via this system and automatic Teletype® equipment.

It was in this same fertile period, not long after WWII, when Don Norregard, an amateur, developed the first practical single-sideband transmitter. Within a few years, amateurs turned from their age-old AM transmitters to these much more efficient SSB systems. Then came Copthorne Macdonald and his slow-scan television, permitting the worldwide transmission of television pictures. And Sam Harris W1FZJ then invented the parametric amplifier.

Amateur radio was growing at about 11% per year in the seventeen-year period after the war until the proposal for what was called "incentive licensing" in 1963. Within one year, the growth of amateur radio stopped and the amateur radio industry shrank 85% in sales. It was at this time that all of the old-time names in the industry disappeared.

Old-timers will remember Hallicrafters, Hammarlund, National, Gonset, Central Electronics, Lakeshore Industries, Multi-Elmac, Harvey Wells, Eldico, etc. Indeed, amateur radio today is about where it would have been by 1965 in terms of growth had not everything suddenly stopped in 1963. This has to do with the second change which is needed if amateur radio is going to again provide our country with new ideas, inventions, and pioneering.

With all due respect to the amateur population, which is aging rapidly, most of the new ideas come from youngsters. Amateur radio has lost a whole generation of youngsters and changes need to be made which will start bringing teenagers back into the hobby. Without them, we will not be able to develop the emergency communications systems we need. A good case can be made for blaming the current loss of our electronic technology to Japan on our lack of a generation of amateurs. Indeed, if the amateur growth had continued at the 11% rate, we would today have over one million engineers, technicians, and scientists in the United States which we do not have at present. This may help to explain the serious lack of technical people for our industry and why our colleges are being picked clean of technical teachers for industry.

Japan took the opposite tack. While we were stopping the growth of amateur radio, they encouraged it with radio clubs in their high schools and a simplified approach to licensing. The result is about two and a half times as many active amateurs in Japan as in the US . . . and with half our population. This is why I see Japanese amateurs in all of the computer and electronic laboratories when I visit Japan.

One of the purposes for amateur radio as stated in our regulations has to do with supplying a source of technically-trained people for use in time of emergency. May I remind you that virtually all of the teachers in the electronic schools during WWII were radio amateurs. Indeed, without the 40,000 amateurs who volunteered for duty, we would have been hard put to train the electronic technicians we needed to operate and maintain our radio, sonar, radar, and other electronic equipment. It was this technological edge which greatly helped speed the end of the war. We used 80% of our amateurs that time. What percentage could we get today, with many amateurs doddering around with walkers? No, we desperately need new blood in amateur radio if we are going to cope with emergencies. We also need it to start feeding the best kind of brains into our troubled electronic industries.

The obvious approach to getting more amateurs is to expose the most susceptible, our teenagers, to the amateur radio hobby and then let nature take its course. Isn't it much better to infect our teenagers with what might be considered the virus of amateur radio? . . . and it is like a virus of the mind . . . and heart. How much better for them . . . and our country . . . if they could be steered towards radio experimenting and operating instead of coin video arcades, pot, punk rock, and gangs helling around. If we can get every high school in the country to establish a ham club, we might just be able to change things.

It wasn't television which stopped the growth of amateur radio. It wasn't CB. We had television all through the 50s and amateur radio never faltered in its growth. CB came along in the 70s and provided us with a temporary influx, mostly of older people. This was not really what we needed. The death of most of the high school radio clubs in 1963-64 stopped most of our influx. Surveys of amateurs during the 11% growth period showed that 50% of all new hams were either 14 or 15 years old. Further, 75% of the new hams were teenagers. Now look at us today! These studies also showed that about 80% of these teenagers went on to careers in electronics or communications. When we cut off the teenagers, we cut off our industry from technical talent.

It is no accident that Japan, with its fast-growing youthful group of amateurs, has taken the lead in electronics technology. Today the innovative developments are coming from Japan instead of the US. Our digital watches, calculators, video recorders, television sets, hi-fi, amateur radio equipment, and so on come, almost entirely, from Japan. Thus, if we want to turn the tide . . . and if we want to develop the emergency communications systems we must have to allow us to cope with any type of emergency . . . we need to concentrate on making amateur radio both attractive and known to teenagers.

In line with this concept, I have arranged to discuss the problems and some proposed solutions with as many of the FCC commissioners as possible. My discussions with Commissioners Washburn, Lawson, Rivera, with Commissioner Ann Jones' administrative assistant Williams, and with Chairman Fowler all were most positive. I found them all genuinely interested in the concepts of freeing amateur radio from past Commission restraints in experimenting and in plans for the possible growth of the service through the attracting of teenagers.

Recognizing the need for the Commission to reduce the cost of the amateur service rather than increase it, I brought up several ideas which could, in the long run, almost cut the cost of the service to the Commission completely. There are three major areas where the Commission has been spending money on amateur radio: licensing, legislation, and monitoring. Much of the work of each of these functions can, I believe, be taken over by amateurs. Further, I believe that the responsibility would be very good for amateur radio, helping us to build more pride in our service and a greater feeling of responsibility for its growth and values.

First, with regard to licensing, I suggest not just a return to managing that function ourselves, but to turning all of the training and examining of candidates for licenses over to radio clubs. Clubs could then both teach the materials needed for each class of license and then examine the students. This would eliminate the need for the Commission to write and disseminate exams. It would also eliminate the use of cheat sheets designed to thwart the Commission's exams.

Technical and rule-understanding exams could be done orally, with candidates demonstrating their ability to go on the air and make a contact. I suggest that examining teams consist of three licensed amateurs as a way of preventing friendships from influencing the outcome. And if clubs were asked to put up a substantial bond or escrow deposit, this would help solve the question of what is a qualifying club and what isn't.

Pending legislation could make it possible for the Commission to again require licensing fees. I favor this, though in moderation. A fee of $10 for a five-year license would comfortably pay for our costs to the Commission if we follow my suggestions. Thus the escrow payments by clubs could be considered prepayments for amateurs they intend to train and license. Each year the club could replenish the fund. If only 2,000 radio clubs put up $1,000 each this would provide a $2,000,000 account. At 15% interest this would amount to $300,000 per year . . . enough to fund the needed coordinating salaries within the Commission.

Another expense which could be more than removed from the Commission has to do with monitoring. It has been this function, by the way, which has been the perennial excuse for not permitting amateurs to experiment with new modes of communications. If we were able to take over this function ourselves, we would no longer have to wait ten or twenty years before being permitted to use even some of the common commercial modes of communications.

Further, considering the enormous body of retired and handicapped amateurs, it would be possible to set up a monitoring system which would not only include all amateur bands, even in remote parts of the country, but would also be able to do routine monitoring of commercial and other bands. This would require coordination between amateur groups and the Commission monitoring facilities. Amateurs will enthusiastically build and operate sophisticated monitoring equipment. With some computer-aided tuning, the run-of-the-mill signals could be ignored and a sensitive net put out for abnormal transmissions.

Such listening groups could alert the FCC monitors to intruders in the amateur or commercial bands, could listen for illegal activities and report them, even up into the microwaves, where little FCC monitoring has yet penetrated. Amateurs, being everywhere, could be organized into a monitoring force far beyond anything the government could envision, even if it had the funds for this growth.

The last area for amateur control is in the changing of our rules and regulations. The Commission has been less than effective in this area, despite the heavy costs involved. Amateurs could, with the cooperation of the Commission, establish a national convention which could meet every two years to discuss and propose rule changes. With representatives from the licensing radio clubs in attendance as delegates, the conference could be run much as the International Telecommunications Union runs theirs. Rule change proposals would be discussed by ad hoc groups, reporting their recommendations to the plenipotentiary for a final ratification and implementation. The FCC would, naturally, be intimately involved in this process as far as communications law and such are concerned. The decisions of the plenipotentiary would be forwarded to the Commission for immediate action.

Those commissioners with whom I discussed this concept were enthusiastic about the way it would save their time, save

a considerable amount of FCC funds, and allow amateur radio to react to change faster.

We are entering a world of satellite direct communications, of cellular radio, of widespread computers and their communications needs. The future is technologically far beyond what we have had in the past. Both amateur radio and our country must be able to keep up . . . and perhaps take on some leadership . . . in this technological race. You've seen the spread of microcomputers, with front-cover articles in *Time* and other such publications. The future is here with us and pushing. I suspect that few amateurs today recognize the importance of amateur radio to the future of our country, just as virtually none gave a thought to the ramifications of "incentive licensing" when it was proposed in 1963. Many of us have gotten so used to amateur radio being fun and just a hobby that we have failed to see it in its true perspective. Yes, it is fun and a hobby for tens of thousands of amateurs. They use it and give little back in return. They fight to maintain the Morse code aspect of entry. They fight any efforts to make this the technical hobby which our regulations outline so clearly for us. They go on the air and rag chew or help fill pileups trying to get a momentary contact with some chap in a remote area of the world . . . all for the reward of a certificate.

Yet we also have a small, dwindling, group of builders and experimenters. In truth, there are thousands of these hobbyists, as is evidenced by the many pages of ads for parts in our amateur radio publications. We know amateurs are building because they are spending so much money on the parts. We also see the articles that they write about this work, encouraging others to try this aspect of the hobby. If we are able to get amateur radio into a high growth mode, we will find that a growing percentage of the new amateurs will get involved with building and designing equipment. This activity seems to be of much more interest to the younger amateurs, who are less intimidated by digital techniques and integrated circuits.

One thing should be remembered about amateurs . . . amateurs in *any* field. Most of the real breakthroughs in technology are made by amateurs, not professionals. The reason for this is simple. You see, government and commercial labs generally can't afford to invest money in projects where there is a chance that they might not work. Amateurs can afford to devote their life to projects with virtually no chance of working. Then, every now and then, one of these wild shots pays off. It may take thousands of amateurs to produce one new invention, but the price is worth it.

Invention is only part of it. Then comes the pioneering. What good is an invention if no one will use it? Until amateurs were able to prove to the military that sideband was better than AM, there was so little demand for sideband transceivers that few were made. Amateur equipment was taken aboard SAC planes and tests run . . . resulting in sideband becoming almost universal for military telephone communications. Hams have done a first-rate job of pioneering new modes such as sideband, NBFM, slow-scan television, and new types of radio Teletype® communications.

If both amateur radio and computer clubs are encouraged in our high schools, I believe we will start seeing a sudden growth of interest in technical careers. I've also discussed this concept with Senator Barry Goldwater and found him most receptive to the idea . . . as well as agreeable to the need for amateur radio to be built up as a resource for our country.

With the freedom to experiment and the amateurs to carry it off, the future of an amateur radio emergency service could be bright. There are opportunities to tie in amateur networks via commercial channels on satellites as well as on some future amateur radio satellites. The development of high-speed digital communications will greatly simplify the handling of emergency messages, allowing them to be handled and routed automatically. We need to remember that any emergency system must be in daily common use if it is going to be dependable and operators are going to be comfortable with it when an emergency occurs.

It is not difficult to imagine a communications system which would enable an amateur to originate a message anywhere in the world and then have it automatically handled and routed to any other spot on Earth almost instantly. If we have the amateurs to do this, I'd say that such a network would be just about inevitable. Ten years ago, amateurs had an automatic network which allowed me to stand on a street corner in Las Vegas and talk simultaneously with another amateur in San Diego and one in Phoenix, all via UHF networking, all with my small hand-held transceiver.

Amateur clubs, by setting coordinating systems to interconnect all of the different mobile communications systems, will be able to establish a communications network which will be able to reach virtually any person in the country in an emergency. It might be that such a system would to some degree act as a deterrent to nuclear attack.

Recommendations

First, I would suggest that NIAC establish a committee to formulate a set of recommended procedures for radio clubs to follow in setting up their ability to furnish emergency communications and coordination.

Then, I would suggest that the Amateur Radio Subcommittee of NIAC set up a committee to work with the other NIAC subcommittees toward a goal of coordination of emergency communications. This would include the broadcast service and whatever is needed to make sure that radio and television stations can, if desired, rebroadcast amateur radio communications.

I recommend that NIAC continue its work toward implementing the growth of amateur radio via contacts with the FCC commissioners, interested senators and congressmen, and any other avenues open.

Fourth, I suggest NIAC set up a committee to work with the Commission toward the goal of cutting FCC costs of administration of the amateur radio service via the establishment of amateur organized monitoring networks. These, when tied in with emergency networks, will be invaluable.

Fifth, I recommend that NIAC establish a committee to work on the problem of establishing chains of command for emergencies so local and national groups will know whom to report to . . . whom to obey.

My apologies for the length of the report, but I wanted to be sure that the groundwork was properly laid for the report to be read by anyone without having to reference past reports.

Respectfully,
Wayne Green W2NSD/1
Chairman, Emergency Action
Subcommittee of NIAC Amateur Radio
Subcommittee. Whew.

THE NEXT STEP

A committee was formed to develop the recommended instructions to help amateur radio clubs to develop their emergency teams. This committee consists of Dave Flinn W2CFP, who is well versed in the problems of emergency operations, Alan Dorhoffer K2EEK, the editor of *CQ*, and me, as the sub-subcommittee chairman. So much for the dangers of making recommendations to government committees.

Since there are a number of clubs which are already involved in setting up emergency communications teams, I'd like to make this a formal invitation for each of the clubs involved to send in a list of what is considered important. I'll take this information and send it to the other committee members so our report will be as complete as possible.

We'll want to know what other groups of communicators you work with. We'll need to know what you have established in the way of an inventory of needed communications equipment and supplies. What about alerting procedures? What about organization? Hierarchy of control? We're interested in setting up what can be considered an instruction manual to help clubs get set up to handle any kind of emergency, from local to regional to national . . . and even international.

NATIONAL POLICY

Our country has gotten terribly behind in both information and implementation of ways to cope with emergencies. The interest in Civil Defense has virtually disappeared . . . yet we have a growing number of groups who are protesting spending money on ways to either ward off attacks or cope with them if they come. I suspect that our strength lies both in our ability to strike back . . . and our ability to survive an attack. Thus, the better organized our emergency communications, the less likely we are to get attacked . . . at least to some extent.

If amateur radio clubs are able to establish an emergency communications system which can work through any type of situation, reaching into every corner of our country, this will be a powerful deterrent in itself. One of the major problems facing an enemy is in trying to destroy the ability of the country to communicate and thus act as a country instead of disconnected and confused groups. Only through amateur radio can such an emergency communications system be established. And this can only be done if *you* accept this need as one which is a personal responsibility of yours.

Yes, we need more hams. We need technical developments. We need more freedom from the FCC. But right now, with what we have, we can make a major start toward the communications system of the future. This is something we can get going on now and have in working shape in a few months. Sure, as we grow and as we are able to bring in more advanced techniques, our system will work better and faster. But we still need a national emergency system upon which to build and grow.

Let's get your club started with this. You may not have a strong ham club in your area, so perhaps this is the time to get one started. Let me know what you are doing . . . and let *QST* and *CQ* know, too. This is a national ham need, not a promotion for any one magazine or group. As you learn and develop, tell others what you've done so that we'll all be able to benefit from what you've learned.

We can make it work and be proud that we are justifying the use of the radio spectrum per 97.1a.

HARRY THROWN OUT!

By golly, the results of the ARRL elections were a surprise. I never thought the board of directors could be so cruel as to not only refuse Harry the job of General Manager of the League, but to just plain throw him out of the whole headquarters organization. That must have come as a terrible blow to him, what with him taking an early retirement from the union in order to get the job and all.

And, hey, they weren't all that much nicer with Baldwin either. Vice President of International Affairs. Now *what* does that mean . . . other than goodbye, Baldwin? Come on, board, have you got no respect? Have you no appreciation for the many years of devotion and loyalty?

Yes, I know, here goes Green criticizing the League again. Well, darn it, if they would do something right I'd be right out there in front with profuse compliments. Mind you, there's no denigration of Sumner involved. It's just that . . . well . . . *you* know.

Say, perhaps Harry can move to New Hampshire. We're always on the lookout for talent to

improve *73* and our other publications. With our mountains to climb, he could easily take off about fifty to seventy-five pounds and get into fighting trim to help amateur radio get back into a growth mode. What say there, Harry? I know he's always been a very big fan of mine, so let's see what happens.

WHAT'S THAT CLOUD?

Is that a nuclear blast cloud rising over New Hampshire? No, the work on our nuclear power generator seems to have been halted. A clipping sent in from a North Carolina paper (where they put much stock in these things) gives us a hint. It seems that there are more cigarettes per person sold in New Hampshire than in any other state. About 254.4 packs for every person... including the kids.

Now before you get the idea that my own efforts to stem the tide of smoking by not hiring smokers is totally ineffective, I should point out that New Hampshire has a lower tax on cigarettes than other states. The result is that Massachusetts (called taxachusetts) people come up here in swarms to buy cigarettes and liquor, both of which are a bargain in New Hampshire.

The gas stations along the border do a land-office business in cancerettes, helping substantially to stamp out life in the great commonwealth just south of us. Liquor is sold in state liquor stores, thus giving us a cut of the action towards lowering taxes. Indeed, we are the lowest taxes state, with no sales tax and no personal income tax.

The only serious problem we have is the air pollution along the Massachusetts border from all those cigarettes.

NO NEWS VS. GOOD NEWS

The recent purchase of *The Daily News* in New York brought back memories of my first visit to *The News*, back in 1938. When I visited *The News* along with my high school class (we often went on field trips to see businesses), little could I have imagined that in ten years I would be working for WPIX, *The News'* television station. Heck, in those days television was a new invention which was being shown at the New York World's Fair. The sets for receiving the few broadcasts were prohibitively priced. In 1938, I was just barely getting going in amateur radio, having been involved for about a year.

The Daily News plant was modern then, with new high-speed presses and row upon row of Linotype machines. The Linotype operators delighted my classmates by making up our names in type slugs and tossing them to us, burning our hands with the hot lead while they laughed.

Hitler was raising hell in Europe and war was brewing. Despite the barrage of propaganda, war was not real to us and it never even occurred to me that before long I might be going to war on a submarine in charge of maintaining and operating all of the complex electronic equipment.

After the war... and after college... having avoided entrapment by large corporations (a fate suffered by most college graduates which dooms them to mediocrity of income for life), I found myself in broadcasting. First I tried radio engineering and announcing. Then, when a spot opened at WPIX for an engineer, I made contact through an old friend Bob Sullivan, who worked as a feature writer for *The Sunday News*.

Bob, a friend of the family, had quite an influence on my life. It was he who introduced me to classical music when I was about seven. He also was a Gilbert and Sullivan nut, which I became, too. I maybe got even by exposing him to country and western, which took with him.

Before we could put WPIX (channel 11) on the air, we had to get some experience. In 1948, there were no unemployed television cameramen to hire. *The News* rented studio space a few blocks from their 42nd street skyscraper at Reeves Sound Studios. Buzz Reeves is reasonably well known today for his incredible contest station. I think they use the call N2AA. Buzz was one of the wealthy hams I talked with when I was looking to start *73 Magazine*. Wisely, he was not interested.

When the studios were finished in *The News* building, we moved to there and finished getting ready to go on the air. We learned to use the cameras, to fix them while operating, to handle the mike booms, and to cope with the various unions which have a vice-like control of New York. The inaugural ceremonies were in the lobby of the building, with me as the cameraman.

It didn't take long before I was nosing around the top floor of the skyscraper, looking for a place for a small ham station. I found an unused room and soon had permission to use it and put an antenna on the roof of the building. I brought up my SCR-522, which was state-of-the-art in those days. Imagine, crystal control! Twenty Watts! Then I put one of the Bill Hoisington (W2BV) 16-element beams up and found myself with a whale of a signal. I could work anything from central Connecticut on down almost to Philadelphia, including all of Long Island. I made thousands of contacts. Hams are still bringing my old *News* building QSL cards to hamfests to flash at me.

Being young and foolish (as differentiated from old and foolish), I wanted to put my beam in the best possible location on the roof of the building. I wanted it out in the open so that I would have a good signal in all directions. Well, the *only* really good place for it was mounted on top of a parapet. I have to admit that I was a bit shaky about climbing out on it to set up the rotator and beam. I had to skinny out about fifty feet, with a 25-story drop on one side and about six stories on the other. Just to help matters, it was windy. It is *always* windy on top of a 37-floor building.

My stint atop *The News* building had lasting repercussions. It was while operating from this aerie that I began wondering what those strange beedle-beedle signals were on the high end of the band. I started asking around and was led to John Williams W2BFD out in Woodside, Queens. John was playing around with radio Teletype®. Being an unrepentant experimenter, I was quickly hooked on RTTY.

John was the father of ham RTTY. He got a lot of us hooked on it in the late 40s. My downfall, if you like to think of it as that, came when I went to work for WXEL, a television station in Cleveland. I was hired on as a television producer and director. They had a mimeo machine, which was a fairly rare item in those days. Within a few days, I managed to get the first issue of a *RTTY Bulletin* out for the few hundred RTTY experimenters. I almost ruined the mimeo machine in the process, but I was started. The *Bulletin* grew into *Amateur Radio Frontiers* and kept going on almost a monthly basis until I became editor of *CQ* in January, 1955.

The News has changed remarkably little in the last thirty years, which probably is why it was recently put up for sale. The gradual closing of one New York paper after another, often in the wake of strikes, has kept the papers from making much money. That and union opposition kept *The News* from modernizing their equipment. I wouldn't be surprised if they still had some of those old Linotype machines being used to set hot slugs of type. I should get back for a visit and see if any of the old television crew are still there.

Bill Hoisington's fire tower eventually blew down in a storm and he found himself fired from the firm he had worked with for years. The main reason for letting him go seemed to be that he was getting too close to retirement pension age. He went into business writing a long series of simple VHF and UHF construction projects for *73*. He moved to Peterborough (as K1CLL) to make this simpler. Following a divorce and some serious ill health, Bill moved to the Philippines and got remarried. He seems to be living happily ever after there, still working on simple home VHF projects.

You know, one of the odd things about operating from the top of a skyscraper or a mountain is that when the two-meter band begins to open, it is the stations on the ground which hear the skip signals first. I would hear New York stations working down into Virginia and North Carolina for an hour or more without being able to hear a whisper of the southern chaps. Then, when the DX was starting to work on up into Connecticut, I would start hearing them and be able to make contact. My elevation had little benefits for that type of contact. There *are* drawbacks to skyscrapers and mountains.

Well, I hope that the new owners of *The News* will modernize it and keep it going. I enjoyed my working there and will never forget the excitement of DXing from that spot.

SATURN V

STATE-OF-THE-ART

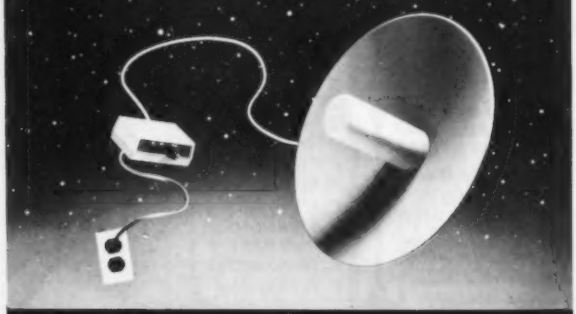

The Saturn-V receiver is a high quality receiver that enables you to receive many ranges of local microwave signals. It is normally used within line of sight of a transmitting tower in a 50 mile range and is simply attached to your TV antenna mast.

Microwave and Satelite Systems

JDL Industries T.M.

1-3	$165.00
4-11	$120.00
12-up	$105.00

4558 Auburn Blvd., Suite 208
Sacramento, California 95841 (916) 454-2190 ↙72

AMATEUR SPECIAL $529.00

HAMEG *Oscilloscopes*

20 MHz DUAL TRACE

to meet every need

WITH PROBES: × 1 & × 10
- **ONE YEAR FULL WARRANTY**
- **SOLID STATE**
- **ASSEMBLED & CALIBRATED**

Service Manual. High Performance 50Hz-80MHz Trigger. 8 × 10cm. Display

MODEL HM-203 **(603)434-5371**

DEALER INQUIRIES INVITED

↙133 *Rivendell Assoc.*

RFD-5 DERRY, N.H. 03038 WARNER HILL

Two-meter H.T. Amplifier Kit

$56.95 PPD. USA

1.5 watts in—20 out
COR BNC in—SO-239 out
small size: 1-3/16" × 3" × 4-1/2"
Class C or AB1

ask about our other UHF & VHF amplifier kits

↙459

QRO ENGINEERING

1398 Edwards Ave.
Lakewood, OH 44107
(216) 221-9500

FOR A SMALL MIRACLE, CALL 1-800-654-8850.

Our small miracle is simply this: call Sentry's TOLL FREE number, and we'll deliver the finest quality crystals on time—from five working days to two weeks, plus our 48-hour Emergency Service.*

The miracle grows larger when you examine Sentry's quality workmanship. Each crystal is made of flawless materials and hand crafted with state-of-the-art technology to exceed MIL-Spec standards.

And when you consider that Sentry is still a small, dependable company out-performing the big ones, our small miracle takes on giant proportions. Fact is, most other companies can't work our miracles, big or small.

Sentry

Crystal Park, Chickasha, Oklahoma 73018 ↙333

*Please allow extra time for precision, UHF and special frequencies.

Introducing A Whole New World Of Capability For Your Repeater . . .

- ☐ FLEXIBILITY, SECURITY - Remote configurability with non-volatile storage of command codes, ID and tail messages, tone characteristics, timing, and more
- ☐ QUICK, EASY, SECURE AUTOPATCH - Store/forward patch plus two autodialers
- ☐ FLEXIBLE LINKING - Supports synthesized remote bases
- ☐ VOICE RESPONSE TELEMETRY - Meter readback with natural sounding synthesized speech lets you monitor your site, gives users diagnostic information about their signals
- ☐ SOUNDS GREAT! - Audio processing with delay line to mute squelch tail and tones
- ☐ GROWTH POTENTIAL - Expandable, upgradable to preserve your investment
- ☐ LOW POWER . . . EASY TO INTERFACE . . . AND MUCH, MUCH MORE!

The RC-850 Repeater Controller!

acc advanced computer controls

10816 Northridge Square
Cupertino, CA 95014
(408) 253-8085 ↙124

Call or write for detailed specifications on the RC-850 Repeater Controller.

↙See List of Advertisers on page 114

RF ANNOUNCING

RF PRODUCTS announces production of 5/8 wavelength VHF telescoping antennas for 144-148 MHz (2M), 152-174 MHz and 220-225 MHz (1¼). These new antennas are intended for use on hand-held and base station transceivers. They are available with BNC connector, 5/16-32 stud, or PL-259 connector. A telescoping brass nickel-plated nine section radiator is used for lighter weight and less RF junctions than previously available 5/8 wavelength antennas. Maximum gain is acheived by the combination of a base spring for whip protection and a tuned matching network for minimum VSWR. Minimum 2 meter bandwidth for 1.5:1 VSWR is 3.5 MHz. Overall length with BNC connector is 44¼ inches (110.25 CM). The BNC connector and 5/16-32 stud models are intended for hand-held transceiver (HTs) use and the PL-259 model which includes a type M359 right angle adaptor is intended for direct rear mounting on base station transceivers. Suggested list price for all models is $19.95, the most popular of which are listed below.

P/N	DESCRIPTION	P/N	DESCRIPTION
191-200	2 M. 5/16-32 stud	191-800	1¼ M. 5/16-32 stud
191-214	2 M. BNC connector	191-814	1¼ M. BNC connector
191-219	2 M. PL-259 connector	191-819	1¼ M. PL-259 connector

ELECTRICAL SPECIFICATIONS

Gain ref ¼ wave helical	6db min.	
Bandwidth(2M) 1.5:1 VSWR	3.5MHz min.	
Bandwidth(1¼M) 1.5:1 VSWR	5MHz min.	
Maximum power(HT models)	10 watts	
Maximum power(PL 259 model	30 watts	

MECHANICAL SPECIFICATIONS

Length extended(2M)	44 5/16" (1125MM
Length extended(1¼M)	43 7/8" (1115MM
Length collapsed(2M)	8 15/16" (228MM
Length collapsed(1¼)	8⅜" (210MM
Weight	2.2oz(60g

SPECIALIZING IN PORTABLE, FIXED STATION AND TEST EQUIPMENT ANTENNAS
Orders factory-direct are postage prepaid in continental U.S.
DEALER INQUIRIES INVITED

RF PRODUCTS ↙ 138

P.O. BOX 33, ROCKLEDGE, FL.32955 (305) 631-0775

1900 – 2500 MHZ KITS

DOWN CONVERTER KIT $19.95

- 1 P.C. BOARD PRE-DRILLED AND SOLDER FLOWED
- 3 MRF901 TRANS.
- 2 HP DIODES
- 6 CHIP CAPS "LARGE"
- 8 RESISTORS
- 4 PREPAIRED COILS, FACTORY WOUND
- 1 10 MFD CAP.

ANTENNA KIT $19.95

- 33 WASHERS
- 32 SPACERS
- 1 3 FOOT ROD
- 2 NUTS
- 1 8" PVC PIPE
- 2 4" END CAPS
- 1 MOUNTING BAR
- 1 "F" CONNECTOR
- 1 NUT AND BOLT

POWER SUPPLY KIT $19.95

- 1 P.C. BOARD
- 1 POWER TRANSF.
- 1 317L ADJUSTABLE REGULATOR
- 1 FINE TUNING POT. WITH SWITCH
- 1 COARSE TUNING POT.
- 2 KNOBS
- 3 "F" CONNECTORS
- 4 POWER DIODES
- 1 RF CHOKE
- 3 RESISTORS
- 3 DISK CAPS.
- 1 1000 MFD CAP.
- 1 DPDT MINI TOGGLE SWITCH
- 1 LED WITH HOLDER

SUPPLY CABINETS
ALUMINUM CABINETS PREPUNCHED TO FIT POWER SUPPLY KIT.....$9.95

MANUFACTURED CABLE SETS
10 FT. PLUS SET.....$19.95
7 FT. PLUS SET.....$15.95
5 FT. PLUS SET.....$13.95

DISCOUNTS
1 TO 4.....10%
5 TO 9.....15%
10 TO 24.....20%
25 TO 49.....25%
50 TO 99.....30%
100 TO 999.....35%
1000 UP.....40%
DIFFERENT KITS CAN NOT BE ADDED FOR QUANITY DISCOUNTS.

MAIL ORDERS
ADD $5.00 FOR SHIPPING AND HAN-DLING.
INDIANA RESIDENTS ADD 4% SALES TAX.

MasterCard | American Express Cards Welcome | VISA

TRIONYX IND. INC.
6219 COFFMAN RD.
INDIANAPOLIS, IND.
46268 ↙ 104
(317) 291-7280
(317) 291-2995

FAST SCAN

$399

Have you tried it yet?
ATV TRANSMITTER/CONVERTER

TC—1

- *10 Watts Output
- *Standard Frequencies Available
- *Broadcast Standard Sound
- *High-resolution & color video
- *Regulated AC Supply Built In
- *Tuneable Downconverter & Preamp

Connect to the antenna terminals of any TV set, add a good 450 MHz antenna, a camera and there you are. . . Show the shack, home movies, computer games, video tapes, etc.

ATV DOWNCONVERTER

For those who want to see the ATV action before they commit to a complete station, the TVC-4 is for you. Great for public service setups, demos, and getting a buddy interested. Just add an antenna and a TV set tuned to CH. 2, 3, or 4 and plug in to 117 volts a.c. **$89.00**

TVC-4

TVC-4L extra low-noise version . . .$105 delivered in USA

HOMEBREWERS: ASK FOR OUR BASIC FOUR-MODULE PACKAGE

CALL OR WRITE FOR OUR COMPLETE LIST OF SPECIFICATIONS, station set-up diagrams, and optional accessories which include antennas, modulators, detectors, test generators, cameras, etc. WE ARE A FULL-LINE SUPPLIER OF ALL YOUR ATV NEEDS.

TERMS: VISA or MASTER CARD by telephone or mail, or check or money order by mail. All prices are delivered in USA. Allow three weeks after order for delivery.

P.C. ELECTRONICS (213) 447-4565
Tom W6ORG Maryann WB6YSS 2522 Paxson Lane, Arcadia, California 91006

BARKER & WILLIAMSON'S
PORTABLE ANTENNA
MODEL 370-10

Designed for APARTMENTS — MOTELS — VACATIONS
Quick Simple Installation. Operates on 2, 6, 10, 15, 20 and 40 meters. All coils supplied. Only 22-1/2 inches long. Weighs less than 2 lbs. Supplied with 10 ft. RG-58 coax and counter poise. Whip extends to 57 inches. Handles up to 300 watts.
VSWR—1.1:1 when tuned
Write for more details and other B&W products

B&W
BARKER & WILLIAMSON, INC.
10 CANAL STREET
BRISTOL, PA. 19007
215-788-5581 ↙ 11

VISA | MasterCard

BASE

RINGO RANGER II

7dB GAIN
HIGHEST GAIN 2 METER OMNI
OUTPERFORMS CONE AND DOUBLE ZEPP
WORK MORE STATIONS
ELIMINATE NOISE
LIGHTNING PROTECTED
ACCESS MORE REPEATERS
ASSEMBLE EASILY
INSTALL QUICKLY
A COMPLETE ANTENNA ALL PARTS INCLUDED
600,000 HAPPY USERS BECOME ONE TODAY
ARX-2B 134-164MHz
ARX-220B 220-225MHz
ARX-450B 435-450MHz

TERRIFIC 2 METER RANGERS

MOBILE RANGERS

MORE RANGE
3 dB GAIN
5/8 λ STAINLESS WHIP
GRIP TIGHT 90LB MAGNET
CHROME PLATED BASE
NEAT APPEARANCE
THUMB LOCK ADJUSTMENT
NO WHIP CUTTING
LOW PRICE
MAGNETIC MOUNTS
AMS-147 146-148 MHz
AMS-220 220-225 MHz
TRUNK LIP MOUNTS
ATS-147 146-148 MHz
ATS-220 220-225 MHz

MOBILE

BUY FROM YOUR DEALER

cushcraft CORPORATION

THE ANTENNA COMPANY
48 Perimeter Road, P.O. Box 4680
Manchester, NH 03108
Telex - 953050

106

INTRODUCING OUR MDS-AMATEUR-ETV
NEW
32 ELEMENT YAGI ANTENNA

- NOT A KIT
- 1.9-2.5 GHz
- 38½" LENGTH
- 23 dB AVERAGE GAIN
- DIE CAST WATERPROOF HOUSING FOR ELECTRONIC CIRCUITRY
- COMMERCIAL GRADE
- INCLUDES MOUNTING HARDWARE

MAE-1 32 Element YAGI Antenna . . . $19.95

SWD-1 VIDEO CONVERTER FOR CABLE TV



The SWD-1 Video Converter is utilized on cable TV systems to remove the KHz's signal from a distorted video (channel 3 in/out) and also pass thru the normal undistorted/detected audio signal. Rocker switch selects operating mode to remove KHz's distortion from the video or pass all other channels normally. Simple to assemble—less than 30 minutes. Pre-tuned. Input/output Channel 3. Impedance 75 ohms. 117VAC.

SWD-1 Video Converter Kit **$69.95**

VTR ACCESSORIES

SIMPLE SIMON VIDEO STABILIZER

Model VS-125

Simple Simon Video Stabilizer, Model VS-125, eliminates the vertical roll and jitter from "copy guard" video tapes when playing through large screen projectors or on another VTR. Simple to use, just adjust the lock control for a stable picture. Once the control is set, the tape will play all the way through without further adjustments. Includes 12V power supply.

VS-125 Video Stabilizer wired **$54.95**

SIMPLE SIMON VIDEO SWITCHING BOX

Model VSB-300

The Affordable Video Control Center!

Excellent in isolation and no loss routing sytem. Simple Simons VSB-300 Video Switching Box enables you to bring a variety of video components together for easy viewing/dubbing. Also you gain the ability to record one channel while viewing another. Unit includes two F-type quick connector ended cables.

VSB-300 Video Switching Box wired **$19.95**

SIMPLE SIMON ELECTRONIC KITS, Inc.

7 + 11 SWD PARTS KITS

MITSUMI VARACTOR UHF TUNER

Model UES-A56F

$34.95



Freq. Range UHF470 - 889MHz
Antenna Input 75 ohms
Channels 14-83 Output Channel 3

KIT NO	PART NO	DESCRIPTION	PRICE
1	VT1-SW	Varactor UHF Tuner, Model UES-A56F	$34.95
2	CB1-SW	Printed Circuit Board, Pre-Drilled	18.95
3	TP1-SW	P.C.B. Potentiometers, 1-20K, 1-1K, and 5-10K ohms, 7-pieces	5.95
4	FR35-SW	Resistor Kit, ¼ Watt, 5% Carbon Film, 32-pieces	4.95
5	PT1-SW	Power Transformer, PRI-117VAC, SEC-24VAC, 250ma	8.95
6	PP2-SW	Panel Mount Potentiometers and Knobs, 1-1KBT and 1-5KAT w/Switch	5.95
7	SS14-SW	IC's 7-pcs, Diodes 4-pcs, Regulators 2-pcs Heat Sink 1-piece	29.95
8	CE9-SW	Electrolytic Capacitor Kit, 9-pieces	5.95
9	CC33-SW	Ceramic Disk Capacitor Kit, 50 W.V., 33-pieces	7.95
10	CT-SW	Varible Ceramic Trimmer Capacitor Kit, 5-85pfd, 6-pcces	6.95
11	L4-SW	Coil Kit, 18mhs 2-pcces, .22μhs 1-piece (prewound inductors) and 1 T37-12 Ferrite Toroid Core with 3 ft. of #26 wire	5.80
12	IC5-SW	I.C. Sockets, Tin inlay, 8-pin 5-pieces and 14-pin 2-pieces	1.95
13	SR-SW	Speaker, 4x8" Oval and Prepunched Wood Enclosure	14.95
14	MISC-SW	Misc. Parts Kit Includes Hardware, (6/32, 8/32 Nuts, & Bolts), Hookup Wire, Ant. Terms, DPDT Ant. Switch, Fuse, Fuseholder, etc.	9.95
When Ordering All Items, (1 thru 14), Total Price			139.95

UHF ANTENNAS and ACCESSORIES



ZYZZX

VHF-UHF WIDEBAND ANTENNA AMPLIFIER

MODEL ALL-1

50 MHz — 900 MHz

12 dB GAIN ± 0.5dB

A Revolutionary New One Stage HYBRID IC Broadband Amplifier

This unit is not available anywhere else in the world. One unit serves many purposes and is available in Kit or Assembled form. Ideal for outdoor or indoor use. Input-output impedance is 75 ohms. Amplifier includes separate co-ax feed power supply. Easily assembled in 25 minutes. No coils, capacitors etc. to tune or adjust.

ALL-1 Complete Kit with power supply **$24.95**

ALL-1 Wired and Tested with power supply **$34.95**

Our New STVA 14.5 dB GAIN, 14 ELEMENT CORNER REFLECTOR YAGI ANTENNA

STVA-3 Yagi Antenna, 14.5 dB, 75 ohm, Chan. 69-83 . . . **$19.95**

STVA-4 Yagi Antenna, 14.5 dB, 75 ohm, Chan. 44-52 . . . **$19.95**

STVA-1 Yagi Antenna, 11.5 dB, 75 ohm, Chan. 42-54 . . . . **$9.95**

RG-59/U	75 ohm Low Loss Coax Cable	$ .12 p/ft
F-59	Coaxial Connectors, ea.	.39
MT-1	Special UHF 75-300 ohm Matching Transformer, ea.	1.45
ALL-1	HYBRID IC Wideband VHF-UHF-FM Antenna Amplifier Kit	24.95
ALL-1	HYBRID IC Wideband VHF-UHF-FM Ant. Amp. Assembled	34.95

Available by Mail Order Only — Send Check or Money Order To:

SIMPLE SIMON ELECTRONIC KITS,™ Inc.

Calif. Orders:
3871 S. Valley View, Dept 7
Las Vegas, Nevada 89103
Tel: (702) 322-5273

All Other Orders:
11850 S. Hawthorne Blvd. Dept 7
Hawthorne, Calif. 90250
Tel: (213) 675-3347

Minimum Order: $16.95. Add 10% Shipping and Handling on orders under $40.00. For orders over $40.00, add 5%. Minimum Shipping and Handling $2.00. **Catalog $1.00.**
— VISA and Mastercard Acceptable —

See List of Advertisers on page 114

MIDCOM

CALL NUMBER ONE!

CARLOAD INVENTORIES • ROCK BOTTOM PRICES
SUPER-FAST SERVICE

LINES								
AEA	ALPHA	CUSHCRAFT	DENTRON	KANTRONICS	MINI-PRODUCTS	NYE	TEN TEC
AVANTI	BEARCAT	COLLINS	HY GAIN	KLM	MOR GAIN	PALOMAR ENG	UNIVERSAL
ASTRON	BIRD	CDE	HUSTLER	KENWOOD	MIRAGE	REGENCY	UNARCO-ROHN
ALLIANCE	BENCHER	DRAKE	ICOM	MICROLOG	MFJ	SWAN	VIBROPLEX

CALL TOLL FREE **1-800-325-3609** IN MISSOURI 314-961-9990

MID-COM ELECTRONICS • 8516 MANCHESTER ROAD • BRENTWOOD, MO 63144

52

A HAM FIRST . . .

The FIST FIGHTER™

- Send Perfectly-Timed Code
- Perfect 1:3 dot:dash ratio all the time
- Normal key-down tune-up, no switch needed
- Exclusively for straight keys
- Side-tone Oscillator
- Uses CMOS Digital Circuits
- Grid or direct keying
- 3 to 30+ WPM

Assembled and Tested	79.95
Kit	59.95
Shipping and Handling	2.50

VISA and MasterCard accepted.
Virginia residents add 4% sales tax.

Blacksburg Group
Box 242
Blacksburg, Virginia 24060
703/951-9030

118

CALL TOLL FREE
1-800-238-6168

In TN. call 901-683-9125

MEMPHIS AMATEUR ELECTRONICS

(Formerly-Germantown-Sere-Rose)

Authorized Dealer for: Kenwood, Yaesu, Icom, Drake, Mirage, AEA, Info-Tech, Ten-Tec, MFJ, Cubic, and B&W.

MON-FRI 9:00—5:00
SAT 9:00—12:00

139

Write: 1465 Wells Stat. Rd., Memphis, Tn. 38108

GLB
HIGH PERFORMANCE PRESELECTORS

MODEL P50 to P500

- 50 - 500 MHz
- Ultimate rejection over 80 dB
- Five large helical resonators
- Low noise
- High overload resistance
- Typical rejection figures:
  ±600 kHz at 144 MHz: −30 dB
  ±1.6 MHz at 220 MHz: −40 dB
  ±5 MHz at 450 MHz: −45 dB
- The solution to interference, intermod and desens problems on repeaters
- 12V DC operation
- Dimensions only 1.6 x 2.6 x 4.75 excluding connectors
- Custom tuned to your frequency
- Low cost — only $69.95
- Allow $2.00 for shipping and handling

We have a complete line of transmitter and receiver strips and synthesizers for Amateur and commercial use. Write or call for our free catalog.

We welcome MasterCard or VISA

GLB ELECTRONICS

1952 Clinton St., Buffalo, N. Y. 14206
143 1-(716) 824-7936, 9 to 4

110VAC MUFFIN FAN

cooling fan - suitable for electronic/electrical equipment cooling. 3200 RPM/100 CFM. Plastic construction. Quiet running, 4-11/16" square x 1-1/2" thick, 3 blade fan. Removed from used equipment, checked out and guaranteed.

3 BLADE—$6.00 **5 BLADE—$7.00**
10 BLADE—$8.00 **3.13" Sq.—$7.50**

AN/URM-250 SIGNAL GENERATOR covering 10 KHz to 50 MHz in eight bands. RF output: 0.1 to 100,000 uv in 50 ohm load; 2 volts adjustable across high load impedance. Amplitude modulation: 0 to 50% 400 or 1000 Hz internal. With 1 MHz crystal calibrator. Power required: 115 VAC 50-1000 Hz. 11¼ x 14 x 10¾; SH WT: 44 LBS. Used, reparable, less accessories, **$55.00**, w/accessories **$75.00**

HEAT SENSOR ELEMENT 99¢

Manufactured by Elmwood. Opens at 200°F. Excellent for building heat & fire alarms. 5/8" dia. x 11/32" deep, 3/8" tabs for push or terminals. 15/16" C. to C. mounting.

SG-12/URM-48 FM SIGNAL GENERATOR. 19.5 to 102 MHz FM in five bands with deviation ranges 0 to 25, 50, and 100 KHz; 1000 Hz modulation. Also if outputs on 1.4, 2.515, 2.65, 2.88, 4.3, 4.45, 5.0, 5.35, 15 MHz, plus two spare positions. Calibrated output voltages: 0.5 uv to .01 volts (RF); 0.5 uv to 1.0 v (IF), output impedances: 10 ohms (RF); 25 ohms (IF). With 1 MHz and/or 2 MHz crystal calibrator markers. Power required: 115/230 VAC 50-1000 Hz. Size: 12 x 18 x 12; Shpg Wt: 85 LBS. Used, reparable, **$100.00**

STANDARD BELL & CHIME TRANSFORMERS Made to exactly replace the very popular types most commonly found in homes around the nation. It takes just minutes to replace a burned out unit—and it can save you big money in electricians charges. These are UL approved for long life

6-12-18VAC $3.95

ELECTRONICTOWN INC.

440-7th AVE. BOX 2048 SAN DIEGO, CA 92112
119 West Coast Div. Phone: (714) 234-9871

HT-Power!

Limited Offer...

SUPER STICK II

2 METER 5/8 WAVE TELESCOPIC ANTENNA

PLUS

A DUCK FOR UNDER A BUCK

$19.99 + 1¢

FOR THE DUCK

SUPER STICK II	PRICE	GAIN *	BASE CONNECTOR **	FULLY COLLAPSED
	$19.95	6-9 DB	BNC-Tempo 5/15-32 TNC-F—50239	Collapsed is a matched 1/4 Wave Antenna
BRAND C	$26.95	6-9 DB	BNC ONLY	NA Will not transmit in collapsed position.
BRAND V	$24.95	5-8 DB	BNC ONLY	NA Will not transmit in collapsed position.

* Measured Field Strength Over Rubber Duck
** Specify Base Type BNC, Tempo, Ect.

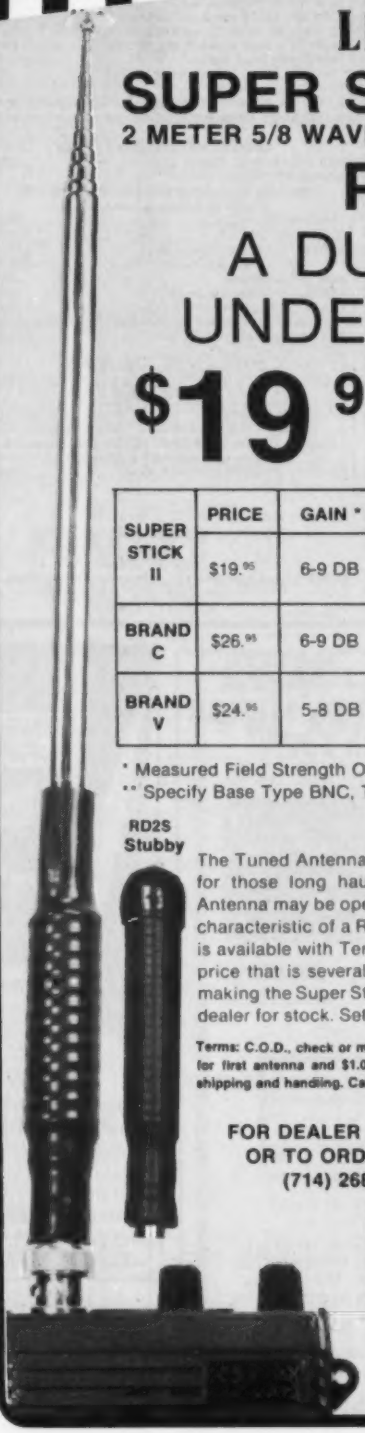

RD2S Stubby

The Tuned Antenna Company brings you the Super Stick II for those long hauls with your H.T., plus our 5/8 Wave Antenna may be operated collapsed with the same operating characteristic of a Rubber Duck Antenna. The Super Stick II is available with Tempo S-1, BNC-TNC-F-PL-259 Bases at a price that is several bucks under other 5/8 Wave Antennas, making the Super Stick II the best buy around. See your local dealer for stock. Settle for nothing less than a Super Stick II.

Terms: C.O.D., check or money order. Please add $2.00 for first antenna and $1.00 for each additional antenna to cover shipping and handling. California residents add 6½ sales tax.

FOR DEALER LOCATION OR TO ORDER CALL: (714) 268-0720

VISA

master charge

THE TUNED ANTENNA CO.

57

9520 Chesapeake Dr. #606
San Diego, California 92123

See List of Advertisers on page 114

✓453

ege, inc

ORDER TOLL FREE

JUNE VALUES

1-800-36-4799

ORDER HOURS: 11 am - 8 pm M-F
Closed Tuesdays
9 am - 4 pm Saturday

Bonus: 2% Discount for Prepaid Orders
(Cashier's Check or Money Order)

VISA

TEN-TEC SPECIALS

515 Argonaut HF XCVR	399.95
525 Argosy HF XCVR	439.00
580 Delta HF XCVR	699.00
546 Omni-C HF XCVR	969.00

TEN-TEC Accessories in stock at discount prices

MJF PRODUCTS (Call for other MFJ items)

989 New 3KW Tuner	287.75
962 1.5KW Tuner mtr/switch	199.95
949B 300 watt deluxe tuner	122.00
941C 300 watt tuner switch/mtr	78.42
940 300 watt tuner switch/mtr	69.70
484B Grandmaster memory keyer 12 mag	121.72
422 Pacesetter Keyer w/Bencher BY1	87.15
408 Deluxe Keyer with speed mtr	69.69
496 Keyboard II	296.95
752B Dual tunable filter	78.42
SUPER STICK II 5/8 2m ant	14.95

DAIWA/MCM

CN 520/CN 540 Watt Meters	59.95/69.95
CNW418/CNW518 Ant. Tuners	169.95/279.95
CNA 2002 Auto 2.5W Tuner	399.95

ASTRON POWER SUPPLIES (13.8 VDC)

RS7A 5 amps continuous, 7 amp ICS	48.60
RS12A 9 amps continuous, 12 amps ICS	68.35
RS20A 16 amps continuous, 20 amps ICS	87.20
RS20M same as RS20A + meters	105.50
RS35A 25 amps continuous, 35 amp ICS	131.95
RS35M same as RS35A + meters	151.95
VS35M 25 amp continuous adjustable	171.00
VS20M 16 amp continuous adjustable	124.00
MINIQUAD HQ-1	129.95

VoCOM ANTENNAS/2m Amps

5/8 wave 2m hand held Ant	14.95
2 watts in, 25 watts out 2m Amp	69.95
200 mw in, 25 watts out 2m Amp	82.95
2 watts in, 50 watts out 2m Amp	105.95
MIRAGE AMPS & WATT METERS	CALL
MP1/MP2 Watt Meters	
2m Amps B23, B1016, B108, B3016	
UHF Amp D1010N	
BENCHER PADDLES Black/Chrome	35.25/42.95
BUTTERNUT *NEW!* HF6V 10-80m Vertical	99.95

SUPER SPECIALS

AEA Isopole Ant., Keyers, Code Readers	CALL
ROTOR SPECIALS	
(When purchased with Cushcraft, HyGain, KLM, Mosley or Hustler Triband Beam)	
ALLIANCE HD73	89.95
CDE Ham IV	165.95
AZDEN PCS 300 handheld, 2m	284.00
PCS 3000 2m XCVR	284.00
MOSLEY Antennas	CALL
TOKYO Hy-Power 2m Amps	CALL
SANTEC S7-7/7 440-450 handheld	239.00
NEW SANTEC 2m & 440 MHz h/helds	Call for quotes
KDK FM 2025A 25 watt FM XCVR	269.95

BIG DISCOUNTS

KENWOOD, ICOM, YAESU, AZDEN, KDK, DENTRON
— Call for our quote —

HY-GAIN ANTENNAS	CALL FOR QUOTES

NEW! TH7DX Triband Beam NOW IN STOCK!
Upgrade kits for TH6DXX to TH7DX. Most antennas now with stainless hardware.

HY-GAIN ANTENNA/TOWER PKGS	CALL

CUSHCRAFT (other antennas in stock)

A4 New Triband Beam 10-15-20m	204.00
A3 New Triband Beam 10-15-20m	164.00
AV3 New 10-15-20m Vertical	41.50
ARX 2B New Ringo Ranger 2m	33.95
A32-19 2m "Boomer" DX Beam	75.95
220B 220 MHz "Boomer"	68.95
214B Jr. Boomer 144-146 MHz	61.95
214FB Jr. Boomer 144.5-148 MHz	61.95
A147-11 11-Element 2m	34.50

TELEX HEADSETS-HEADPHONES

C1210/C1320 Headphones	22.95/32.95
PROCOM 200 Headset/dual Imp. MIC	77.50
PROCOM 300 lt/wt Headset/dual Imp. mic	69.95

CABLE RG213 Mil Spec	26¢/ft.
RG8/U Foam 95% Shield	24¢/ft.
8 wire Rotor 2 #18, 6 #22	16¢/ft.

KLM ANTENNAS (other antennas in stock)

KT34A 4-Element Triband Beam	314.95
KT34XA 6-Element Triband Beam	459.95
144-148 13LB 2m 13-Elem. with balun	77.95
144-148 16C 2m 16-Elem. for oscar	93.55
420-450 14 420-450 MHz 14-elem. beam	37.54
420-450 18C420-450 MHz 18-elem. oscar	58.70
432 16LB 16 elem. 430-434MHz beam/balun	60.70

HUSTLER 5BTV 10-80m Vertical	99.95
4BTV 10-40m Vertical	78.98
3TBA New 10-15-20m Beam	188.95

HF Mobile Resonators	Standard	Super
10 and 15 meter	8.95	13.50
20 meters	11.95	15.95
40 meters	13.95	18.50
75 meters	14.50	28.95

AVANTI AP 151.3G 2m on glass ant	27.95

ORDER INFORMATION

Orders: 1-800-336-4799
Information and Virginia Orders: (703) 643-1063
Store Hours: M-W-F: 12 noon-8 pm
Thursday: 10 am-4 pm
Saturday: 9 am-3 pm

Mailing Address: 2410 Drexel St.
Woodbridge, VA 22192

Store Location: 14415 Jefferson Davis Hwy.
Woodbridge, VA 22191

— CALL FOR QUOTES —

Send stamp for a flyer. Terms: Prices do not include shipping. VISA and Master Charge accepted. 2% discount for prepaid orders (cashier's check or money order). COD fee $2.00 per order. Prices subject to change without notice or obligation.

DOLLAR SAVER/SPACE SAVER
WELZ SP-300 SWR & POWER METER
1.8 to 500 MHZ/1 W to 1 KW

Exclusive cross over frequency range
3 Transmitter/3 Antenna Connectors.
One SWR/Power for the serious amateur who operates all bands, HF to 450 MHz

ONLY $196.50

Serious Dealers Listing Available.

NCG

✓318

1275 N. Grove St.
Anaheim, Cal. 92806
(714) 630-4541

NOTE: Price, Specifications subject to change without notice and obligation.

the DX-PEDITER

A HAM RADIO PROGRAM FOR
THE APPLE* COMPUTER
by Fred Pearlman WØDLM

BASH DOES IT AGAIN . . .
. . . ON DISC, WITH DOCUMENTATION!!!

Computerize your DX operations. Speed up and simplify your DXCC efforts. Locate any of the 318 approved countries by name, number or prefix . . . and find out if you've worked it . . . with the callsign, band, date, time, heading and distance—displayed instantly. DX-PEDITER'S memory contains all the info you need. ENTER AND UPDATE new and pertinent information as to country status and how and when you worked it . . . and much more.

(Now Available at Your Dealer)

If ordering direct: Retail $29.95. Add $2.00 shipping/handling
California residents, please add $1.95 Sales Tax

BASH EDUCATIONAL SERVICES, INC.
P.O. Box 2115 San Leandro, CA 94577
(415) 352-5420

✓26

WIRE AND CABLE

RG-213	27¢/ft
RG-8U foam, 95% braid	23.5¢/ft
RG-8X foam, 95% braid	11.5¢/ft
RG-59 mil spec	11.5¢/ft
RG-11U	19¢/ft
450 ohm ladder line, 100ft roll	$10.75
8 conductor rotor cable	15¢/ft
14 Ga. Stranded Copper	(50ft. mult.) 8¢/ft
12 Ga. Solid Copperweld	(50ft. mult.) 8¢/ft
14 Ga. Solid Copperweld	(50ft. mult.) 4¢/ft
8 Ga. Solid Aluminum	(50ft. mult.) 6¢/ft

ANTENNA ACCESSORIES

Ceramic Dogbone Insulators	65¢/ea.
Amphenol Silver Plate PL-259	75¢/ea
W2AU Balun 1:1 or 4:1	$13.25
VAN GORDEN 1:1 Balun	$8.50
VAN GORDEN 1:1 Center Insul	$5.50
B&W Traps 80/40m thru 10m	$25.65/pr
B&W 375 or 376 Coax Switch	$19.25
B&W 593 Coax Switch	$17.95
B&W 595 Coax Switch	$22.50

ROTORS

CDE AR-22	$51.45
CDE CD-45	$92.55
CDE HAM 4	$170.30
CDE TAILTWISTER	$238.25

ANTENNAS

MINI PRODUCTS Mini Quad	$127.95
MINI PRODUCTS C-4 Vert.	$55.00
BUTTERNUT HF6V	$99.50
BUTTERNUT 2MCV	$28.50
HY-GAIN	Call or write for
HUSTLER	big discount price
SHURE 444D DUAL IMP. MIC	$45.95
BENCHER PADDLES, black/chrome	$35.00/42.75
LARSON LM-150-MM	$35.00
VOCOM 5/8 2 MTR HT ANT.	15.95
VOCOM 2 IN 25 OUT 2 MTR AMP	69.75
VOCOM 2 IN 50 OUT 2 MTR AMP.	103.95
POCKET POWER	175.55

SHIPPING CHARGES ADDITIONAL. PA RESIDENTS INCLUDE 6% SALES TAX MC/VISA, PREPAY BY CERT. CHECK OR MO AND TAKE A 2% DISCOUNT OFF THE ABOVE PRICES. PRICES SUBJECT TO CHANGE

PLEASE SEND FOR FLYER

LACUE COMMUNICATIONS, ELECTRONICS

102 Village St • Johnstown, PA 15902 ✓4

(814) 536-5500
HOURS MWTh 10 till 6 • Tu&F 10 till 9
Sat 10 till 4

Homebrew Headquarters

COMPONENTS

- ☐ Amphenol connectors
- ☐ B&W coils, switches, antennas
- ☐ Hammond and LMB enclosures
- ☐ Jackson dials and drives
- ☐ J.W. Miller parts
- ☐ Knobs and shaft couplers
- ☐ Millen components
- ☐ Multronics roller inductors
- ☐ Padders and trimmer capacitors
- ☐ Resistors, capacitors, inductors
- ☐ Semiconductors
- ☐ Toroids, cores, beads, baluns
- ☐ Transmitting/Receiving Capacitors
  Air Variables: Cardwell—E.F. Johnson
  Hammarlund—Millen
  Doorknob: Centralab—Jennings
  Vacuum Variables: Jennings
- ☐ Wire, Cable, Open-wire Trans. line

KITS

Fun-Amp (73 5/82) 2 M Converter (73 4/82)
R-X Noise Bridge (hr 2/77) 40 meter
QRP Transceiver (hr 1/81) L Meter
(QST 1/81) General Coverage Reception
with Drake R-4C Receiver (QST 5/81)
Fun-Mitter (73 2/81) Fun-Ceiver (73 7/81)
Fun Oscillator (73 2/82) Solid State
T-R Switch (hr 6/80) Multipurpose UHF
Oscillator (hr 9/81) Split Band Speech
Processor (hr 9/79) SWR Meter (hr 10/81)

1982 Catalog 50 cents

RADIOKIT
Box 411S, Greenville, NH 03048
(603) 878-1033 ✓454

✓461

AZDEN

PHASE II TWIN ANTENNA

NEW!

- SUPER 80-POUND, 100-MPH GRAY MAGNETIC MOUNT WITH MYLAR BASE
- 5/8 WAVE FOR PHASE II SIGNAL * AND *
- 1/4 WAVE FOR CLOSE-IN AND RESTRICTED HEIGHT AREAS
- INSTANT CHANGE-OVER
- SUPERIOR PERFORMANCE
- STAINLESS STEEL SPRING AND WHIP
- CHROME ON BRASS BASE-COMPARE!
- BOTH ANTENNAS ARE FREQUENCY ADJUSTABLE
- COMPLETE WITH 17 FEET OF FOAM COAX AND PL-259 CONNECTOR
- MADE IN U.S.A.

INTRODUCTORY PRICE:

$29.95

COMPARE!!

TWO ANTENNAS FOR THE PRICE OF ONE!

AMATEUR-WHOLESALE ELECTRONICS
8817 S.W. 129th Terrace, Miami, Florida 33176
Telephone (305) 233-3631 - Telex: 80-3356
HOURS: 9 - 5 Monday thru Friday
• U.S. DISTRIBUTOR • DEALER INQUIRIES INVITED

VISA master charge

ORDER NOW TOLL FREE

800-327-3102

ATV

FAST SCAN *$249

A modular approach... for your own custom-designed ATV system....Here's how

TXA5-4 ATV EXCITER/MODULATOR $89 ppd

This wired and tested module is designed to drive the Motorola MHW-710 module in the PA5 10 watt linear amp. The crystal in the 100 mHz region keeps harmonics out of two meters for talk back. The video modulator is full 8 mHz for computer graphics and color. Requires 13.8 vdc reg @ 70 ma. Tuned with xtal on 439.25, 434.0, or 426.25 mHz. Provision for sync expanding. Two frequencies available.

PA5 10 WATT ATV POWER MODULE $89 ppd

The PA5 will put out 10 watts RMS power on the sync tips when driven with 80 mw by the TXA5 exciter. 50 ohms in and out, plus bandwidth for the whole band with good linearity for color and sound. Requires 13.8 vdc regulated @ 3 amps.

FMA5 AUDIO SUBCARRIER GENERATOR ..... $29 ppd

Puts audio on with your camera video just as broadcast TV does at 4.5 mHz. Puts out up to 1 v p-p to drive the TXA5 or VM-2, 3, or 4 modulators. Requires low Z mic (150 to 600 ohms), and + 12 to 18 vdc @ 25 ma. Works with any xmtr with 5 mHz video bandwidth.

TVC-2 ATV DOWNCONVERTER.... $55 ppd

Stripline MRF901 (1.7 db NF) preamp and double balanced mixer module digs out the weak ones but resists intermods and overload. Connects between uhf antenna and TV set tuned to channel 2 or 3. Varicap tunes 420 to 450 mHz. Requires + 12 to 18 vdc @ 20 ma. Super sensitive TVC-2L with NE64535 preamp (9db NF) stage... $69 ppd.

***TXA5, PA5, FMA5 and TVC Basic Module Pkg.**

Call or write for our complete list of specifications, station set-up diagrams, and optional accessories which include antennas, modulators, detectors, test generators, cameras, etc. **WE ARE A FULL-LINE SUPPLIER OF ALL YOUR ATV NEEDS.**

TERMS: VISA or MASTER CARD by telephone or mail, or check or money order by mail. All prices are delivered in USA. Allow three weeks after order for delivery.

(213) 447-4565 Charge card orders only

P.C. ELECTRONICS 2522 Paxson Lane,
Tom W6ORG Maryann WB6YSS Arcadia, California 91006

NEW FAST CHARGE For Your Battery Packs

RECHARGE YOUR HAND HELD RADIO BATTERY PACKS TO FULL CAPACITY IN AS LITTLE AS 45 min. EXAMPLE—Fully Charge ICOM BP3 in 30-45 Minutes.

SEPERATE FUSES PROVIDED INTERNALLY FOR A.C. AND D.C. OPERATION. —BUILT IN REVERSE POLARITY PROTECTION.

ONE UNIT DOES IT ALL

Charge, ICOM, YAESU, KENWOOD, TEMPO, SANTEC and Others Automatically in Your Home, Car, Boat, R.V. or Airplane with Built-in Heavy Duty Power Supply or 12 to 24 V. External D.C. Supply Such as Cigar Lighter in Your Car.

All Solid State
Precision Components Used Throughout. In A Unique Circuit Allows Fast Changing Without Any Perceptible Heating Of Cells. Charger Measures Remaining Charge In Cells Constantly And Turns Off Automatically When Battery Is Fully Charged. Battery Can Be Left Connected Indefinitely.

INCLUDES: Removable 6 Ft. Cord for A.C. Operation and 2 Mating Connectors for D.C. Input and Battery Leads.

FEATURES: High Quality, Custom Designed Heavy Gauge Aluminum Cabinet.

FULL 1 YR. WARRANTY ON PARTS AND WORKMANSHIP

ACCESSORY CONNECTOR TO FIT ICOM BATTERY PACKS, BP-2, BP3, BP4, BP5, $3
PRE-PAID ORDERS INCLUDE $3 SHIPPING & HANDLING

$79.00
CALIF. RESIDENTS INCLUDE 6% TAX

PHONE ORDERS—CALL [209] 586-7059 or [209] 928-3608

MAIL PRE-PAID ORDERS TO:

P.O. BOX 4463 SONORA, CALIF. 95370 G&R DESIGN INC.

✓149 DEALER INQUIRIES INVITED

✓See List of Advertisers on page 114

Wayne Green Books

NEW ARRIVALS



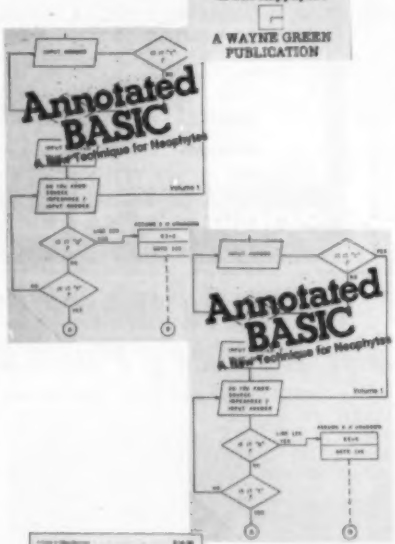



*TRS-80 is a trademark of Radio Shack Division of Tandy Corp.

TEXTEDIT—A Complete Word Processing System in kit form

by Irwin Rappaport

TEXTEDIT is an inexpensive word processor that you can adapt to suit your needs, from writing form letters to large texts. It is written in modules, so you can load and use only those portions that you need. Included are modules that perform:
—right justification
—ASCII upper/lowercase conversion
—one-key phrase entering
—complete editorial functions
—and much more!

TEXTEDIT is written in TRS-80* Disk BASIC, and the modules are documented in the author's admirably clear tutorial writing style. Not only does Irwin Rappaport explain how to use **TEXTEDIT**; he also explains programming techniques implemented in the system.

TEXTEDIT is an inexpensive word processor that helps you learn about BASIC programming. It is written for TRS-80 Models I and III with TRSDOS 2.2/2.3 and 32K.

*TRS-80 and TRSDOS are trademarks of the Radio Shack Division of Tandy Corporation. **BK7387 $9.97 ISBN 0-88006-050-6 Disk Available DS7387 $19.97**

Annotated BASIC—A New Technique for Neophytes.

BASIC programming was supposed to be simple—a beginner's programming language which was so near to English that it could be easily understood. But, in recent years, BASIC has become much more powerful and therefore much more difficult to read and understand. BASIC simply isn't basic anymore.

Annotated BASIC explains the complexities of modern BASIC. It includes complete TRS-80* Level II BASIC programs that you can use. Each program is annotated to explain in step-by-step fashion the workings of the program. Programs are flowcharted to assist you in following the operational sequence. And—each chapter includes a description of the new concepts which have been introduced.

Annotated BASIC deals with the hows and whys of TRS-80 BASIC programming. *How* is a program put together? *Why* is it written that way? By observing the programs and following the annotation, you can develop new techniques to use in your own programs—or modify commercial programs for your specific use.

Annotated BASIC Volume 1 contains Projecting Profits, Surveyor, Things to Do, Tax Shelter, Introduction to Digital Logic, Camelot, The Soundex Code, Deduction, Op Amp, Contractor Cost Estimating.
BK7384 $10.95 ISBN 0-88006-028-X

Annotated BASIC Volume 2 contains Rough Lumber List, Trip Mileage, Flight Plan, OSCAR Data, SWR/Antenna Design, Supermaze, Petals Around the Rose, Numeric Analysis, Demons, Air Raid, Geography Test, Plumbing System Design. **BK7385 $10.95** ISBN 0-88006-037-9

Order Both Volumes and Save! **BK738402 $18.95**

Kilobaud Klassroom—
A practical course in digital electronics

by George Young and Peter Stark

Learning electronics theory without practice isn't easy. And it's no fun to build an electronics project that you can't use. *Kilobaud Klassroom*, the popular series first published in *Kilobaud Microcomputing*, combines theory with practice. This is a *practical* course in digital electronics. It starts out with very simple electronics projects, and by the end of the course, you'll construct your own working microcomputer!

Authors Young and Stark are experienced teachers, and their approach is simple and direct. Whether you're learning at home or in the classroom, this book provides you with a solid background in electronics—and you'll own a computer that you built yourself!

Kilobaud Klassroom contains Getting the Ball Rolling, Gates and Flip-Flops Explained, J K Flip-Flops and Clocked Logic, PC Boards and Power Supplies, Hardware Logical Functions, Voltage, Current and Power Supplies, Transistors, Diodes and OP Amps, Pulses and More Pulses, Counters and Registers, Bus Traffic Control, ROM and RAM Memories, I/O Circuitry, Parallel and Serial I/O Ports, Computer I/O III, Computer I/O IV, Computer I/O V, Processor Connections, Finally . . . The Kilobaud Krescendo, Eproms and Troubleshooting, Expansions and Programming, Machine-Language Programming, Assembly-Language Programming, Connecting to the Outside World.

ISBN 0-88006-027-1 **BK7386 $14.95**

FOR TOLL-FREE ORDERING CALL 1-800-258-5473
WAYNE GREEN BOOKS ● PETERBOROUGH NH 03458

Use the order card or itemize your order on a separate piece of paper and mail to Wayne Green Books Att: Sales ● Peterborough NH 03458. Be sure to include check or detailed credit card information. (Visa, Master Charge or American Express accepted.)
No C.O.D. orders accepted. All orders add $1.50 for the first book, postage and handling; $1.00 each additional book; $10.00 per book foreign air mail. Please allow 4–6 weeks after publication for delivery. Questions regarding your order? Please write to Customer Service at the above address.

MBA READER™, A NAME YOU SHOULD KNOW

What does MBA mean? It stands for Morse-Baudot and ASCII. **What does the MBA Reader do?** The RO model (reader only) uses a 32 character alphanumeric vacuum fluorescent display and takes cw or tty audio from a receiver or tape recorder and visually presents it on the display.

The copy moves from right to left across the screen, much like the Times Square reader board. **Is the AEA model MBA Reader different from other readers?** It certainly is! It is the first to give the user 32 characters of copy (without a CRT), up to five words at one time. It can copy cw up to 99 wpm and Baudot at 60-67-75 and 100 wpm. Speeds in the ASCII mode are 110 and hand typed 300 baud. The expanded display allows easy copy even during high speed reception.

The AEA model MBA has an exclusive automatic speed tracking feature. If you are copying a signal at 3-5 wpm and tune to a new signal at 90 wpm, the MBA catches the increased speed without loss of copy.

The MBA Reader allows a visual display of your fist and improves your code proficiency. It is compact in size, and has an easily read vacuum fluorescent display.

The Reader operates from an external 12 VDC source. This allows for portable/mobile or fixed operation.

Check the AEA model MBA Reader at your favorite dealer and see all the features in this new equipment. If your dealer cannot supply you, contact
Advanced Electronic Applications, Inc. ✓2
P.O. Box 2160, Lynnwood, WA 98036 Call 206/775-7373

AEA Brings you the Breakthrough!

Prices and specifications subject to change without notice or obligation

WORK THE U.H.F. BANDS

Add a transverter or converter to your existing 10m, 6m or 2m equipments. Choose from the largest selection of modules available for DX, OSCAR, EME, ATV.

TRANSVERTERS

MMT 50-144 $234.95
MMT 144-28 $219.95
MMT 432-28 (S) $319.95
MMT 439-ATV $379.95
MMT 1296-144 $399.95
OTHER MODELS AVAILABLE

CONVERTERS

Choose from many models to suit your needs.
Examples: MMC 432-28, MMC 426/439—ATV
MMK 1296-144, MMC 1280—ATV
Write for details and available options.

FILTERS

Prevent OSCAR 8 Mode J desense
Use MMF200-7 $42.95
Stop receiver IMD birdies
Use PSF432 $59.95

ANTENNAS



420-450 MHz J-beams
48 el. 15.7 dBd $75.75
88 el. 18.5 dBd $105.50
70/MBM 48
1250-1300 MHz loop yagi 1296-LY $49.75
Send 36¢ stamps for full details of all our VHF/UHF items.

Pre-selector filters
Low-pass filters
Varactor triplers
Pre-amplifiers

Transverters
Converters
Antennas
Crystal Filters

VISA master charge

Spectrum International, Inc. ✓436
Post Office Box 1084S
Concord, Mass. 01742 USA

Drake's New Digital Multimeter with Advanced Auto Ranging Features.

Simple and easy to operate. The Drake DM2350 Digital Multimeter automatically measures your selected functions in up to 5 ranges, at the touch of a button. Drake's Digital Multimeter will not overload circuits and DC accuracy is 0.8% of reading ± 0.2% of full scale. A continuity test sounds a signal when circuit resistance is less than 20 ohms. The liquid crystal display and three step protection feature with auto-zeroing, polarity indication and over-range warning signal make it ideal for servicemen or hobbyists.

The Drake Digital Multimeter is sold complete with batteries (battery life is greater than 300 hrs.), probes, 20 amp current shunt, spare fuse, and soft carrying case for only $95.95.

Add $2.50 shipping and handling per order. Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax.

DRAKE

In Ohio, or for information call: 1-513-866-2421

Credit-Card buyers may call toll free 1-800-543-5612

R. L. DRAKE COMPANY
540 Richard Street, Miamisburg, Ohio 45342

✓See List of Advertisers on page 114

The HAM SHACK ↙449

808 N. Main • Evansville, IN 47711

AEA	
MBA-RO Reader	$269.00
MBA-RC Rcv/Code Conv. Xmt	349.00
MM-2 MorseMatic Ultimate Keyer	125.00
CK-2 Contest Memory Keyer	90.00
KT-2 Keyer/Trainer	81.00
Isopole 144/220 MHz	35.00
ARRL	
Handbook	$10.00
Ant. Book new & improved	8.00
Large assortment of publications	call
ALLIANCE	
HD73 (10.7 sq. ft.) Rotator	$99.00
U-100 Small Rotator	45.00
ALPHA-DELTA	
R-T 200W Lightning Protector	$29.00
HV 2KW Lightning Protector	32.00
AMECO Amateur Radio Theory Course	$6.75
ASTRON	
RS7A 5-7 Amp Power Supply	$49.00
RS12A 9-12 Amp	69.00
RS20A 16-20 Amp	89.00
RS20M 16-20 Amp w/meter	109.00
RS35A 25-35 Amp	135.00
RS35M 25-35 Amp w/meter	149.00
AZDEN PCS 3000/300	$289.00
Most accessories in stock	call
B&W Folded Dipole (Super Antenna)	$135.00
BASH Study Guides	$9.95
BENCHER BY-1 Paddle	$36.00
BUTTERNUT HF6V	$99.00
CUSHCRAFT	
A3 Tribander 3 EL	$169.00
A4 Tribander 4 EL	209.00
214B 14 EL 2 Mtr Boomer	65.00
32-19 19 EL 2 Mtr Super Boomer	79.00
Many others in stock	call
DAIWA	
CNA 2002 2.5KW Auto Tuner	$425.00
CNA 1001 .5KW Auto Tuner	299.00
CN 520 1.8-60 MHz Small Mtr.	63.00
CN 620B 1.8-150 MHz Mtr	110.00
DRAKE	
TR7A Xcvr	call
TR5 Xcvr	call
ENCOMM (SANTEC)	
ST-144/uP	$295.00
ST-440/uP	call
All accessories in stock	call
HAL	
CT2100 Terminal	$695.00
KB2100 Keyboard	159.00
CWR 685A TeleReader	875.00
HY-GAIN	
TH7DX 7 EL Tribander	$339.00
TH3 MK3S 3 EL Tribander	199.00
V2 2 Mtr Vertical "Excellent"	36.00
HAM IV Rotator 15 sq. ft.	169.00
Tailtwister Rotator 20 sq. ft.	239.00
HDR-300 25 sq. ft.	389.00
Many others in stock	call
ICOM	
720A Magnificent Xcvr!	$1140.00
730 Excellent Rig!	899.00
PS15 Power Supply	135.00
PS20 Heavy Duty PS/Spkr	195.00
251A 2 Mtr All Mode	549.00
290A 2 Mtr All Mode	429.00
25A 2 Mtr Very Small Mobile	305.00
2 AT 2 Mtr Hand Held	235.00
Large stock of xcvrs & accessories	call
KLM	
KT34A 4 EL Tribander	$315.00
KT34XA 6 EL Tribander "Beautiful Ant."	465.00
KANTRONICS	
Interface	$169.00
Mini-Terminal Rcv/Code Conv. Xmt	269.00
LARSEN NLA 150MM 2 Mtr Mag	$39.00
MFJ	
496 Keyboard	$289.00
941C Tuner	81.00
1040 Preamp	90.00
Huge Stock! Call for Discount!	
MIRAGE	
B23	$79.00
B108	155.00
B1016	239.00
B3016	205.00
HF/VHF Meters (5% accuracy)	100.00
SHURE	
444D Very Nice Mic!	$50.00
TEN-TEC	
546 Omni C	$975.00
580 Delta	679.00
525 Argosy	439.00
All accessories in stock	call

812-422-0231

MON-FRI 9AM-6PM • SAT 9AM-3PM

Write for our new and used equipment list

★★★★★★ A STAR IS BORN ★★★★★★

- ★ Ideal for Novices, SWL's and seasoned amateurs
- ★ Built-in code practice oscillator & speaker
- ★ 12 VDC Operation or 120 VAC with adapter provided
- ★ Optional serial/parallel ASCII output port
- ★ Copies Morse, Baudot & ASCII codes
- ★ Two optimized Morse ranges
- ★ Digital & Analog filtering with 16 db AGC
- ★ Automatic speed tracking 3 – 70 WPM

A code reader so advanced it costs you less! Call or write for brochure or order direct.

CODE★STAR™Kit . . . . . CS-K $169.95
CODE★STAR Wired . . . . . CSF $229.95
Optional ASCII Output Port Kit . . . . . CS-IK $ 59.95
Optional ASCII Output Port Kit Wired (Specify 110 or 300 Baud and 20mA or TTL level) . . . . . CSIF $ 79.95

Send check or money order. Use your VISA or MasterCard. Add $5.00 shipping and handling for continental U.S. Wisconsin residents add 4% State Sales Tax.

Microcraft Corporation P. O. Box 513G, Telephone: (414) 241-8144 Thiensville, Wisconsin 53092

↙50

Radio World

CENTRAL NEW YORK'S MOST COMPLETE HAM DEALER

Featuring Kenwood, Yaesu, Icom, Drake, Ten-Tec, Swan, Dentron, Alpha, Robot, MFJ, Tempo, Astron, KLM, Hy Grain, Mosley, Larsen, Cushcraft, Hustler, Mini Products, Bird, Mirage, Vibroplex, Bencher, Info-Tech, Universal Towers, Callbook, ARRL, Astatic, Shure, Collins, AEA. *We service everything we sell!*

Write or call for quote. **You Won't Be Disappointed.**

We are just a few minutes off the NYS Thruway (I-90) Exit 32

OUT OF STATE ORDER TOLL FREE 800-448-9338

ONEIDA COUNTY AIRPORT TERMINAL BUILDING ORISKANY, NEW YORK 13424 N.Y. Res. Call (315) 736-0184

↙307

Warren - K2IXN Bob - WA2MSH Al - WA2MSI

PORTA PEATER™

$99.00 up

M100 A

INSTANT REPEATER

- ★ 4 Channel PROM CW IDer
- ★ Works with any type radios
- ★ VOX or CDR operation
- ★ Complete Timer Functions
- ★ 250 volt switching capability
- ★ Built In Test Functions
- ★ An Instant Repeater
- ★ 20 Page Technical Manual

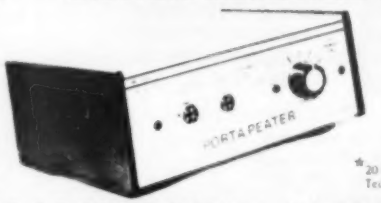

↙302

W-S ENGINEERING P.O. BOX 58, PINE HILL, N.J. 08021 (201-852-0269)

DIRECTION FINDING?

- ★ Doppler Direction Finding
- ★ No Receiver Mods
- ★ Mobile or Fixed
- ★ Kits or Assembled Units
- ★ 135-165 MHz Standard Range
- ★ Circular LED Display
- ★ Optional Digital Display
- ★ Optional Serial Interface
- ★ 12 VDC Operation
- ★ 90 Day Warranty

New Technology (patent pending) converts any VHF FM receiver into an advanced Doppler Direction Finder. Simply plug into receiver's antenna and external speaker jacks. Use any four omnidirectional antennas. See June 1981 issue of **73** for technical description. Kits from $270. Assembled units and antennas also available. Call or write for full details and prices.

DOPPLER SYSTEMS, 5540 E. Charter Oak, Scottsdale, AZ 85254 (602) 998-1151

↙425

. . . at last - everything at your fingertips ! ! !

Bring ORGANIZATION & CONVENIENCE to your HAM Station! Eliminate clutter and provide lots of space for everything you need - Tuners, VFO, CW Keyers, Filters, Telephone, Log Book, Etc...

$184.50

Radio Equipment NOT Included
F.O.B. Culver City
(CA Residents add 6% sales tax)

- *ANGLED REAR SHELF*
- *ALL PARTS FITTED*
- *STURDY CONSTRUCTION*
- *WALNUT or PECAN FINISH*

Floor space: 39"w by 30"d.
Also: 51"w by 30"d - $199.50

Dealers Inquiries Invited

A Finely Crafted Piece of Furniture With a REAL Purpose . . .

Call : (213) 837-4870 or Write for Information

S-F Amateur Radio Services ✓65

4384 Keystone Ave., Culver City, CA 90230

OVER 70 BRANDS IN STOCK · LAND-MOBILE RADIO · BIRD · DRAKE · HYGAIN · ARRL · ICOM · TEN-TEC · B&W · COE

AMATEUR RADIO · SHORTWAVE · SCANNERS

Full Service Shop • Spectrum Analysis • Antennas
New and Used Equipment • CW-SSB-FM. Etc. • Towers
FCC Study Guides • Code Tapes • Books • Accessories

SPECTRONICS

Specialists in Amateur Radio, Short-Wave Listening And Contemporary Electronic Gear.

BEARCAT • MORGAIN • MANY MORE.

HOURS
MON. TUES. WED. 9:30-6:00 PM
THURS. FRI. 9:30-8:00 PM
SAT. 9:30-3:00 PM
CLOSED SUNDAYS, HOLIDAYS

SPECTRONICS, INC. (312) 848-6777
1009 GARFIELD ST. OAK PARK, IL. 60304

UPDATE YOUR HAMSHACK

- *Beautifully styled
- *Sturdily constructed
- *Angled rear shelf
- *Completely sanded & drilled assembles with a screwdriver
- *Tuning controls at your fingertips for ease of operation — great for contests
- *Adds a professional touch to hamshack

VISA and Mastercard welcome
write for brochure

radio equipment not included
$200.00 F.O.B. Stow, Ohio
(In Ohio, add 5½% sales tax)

W-F PRODUCTS P.O. BOX 1578 STOW, OHIO
PHONE: (216) 678-9203 ✓128

AES® Specials!

Panasonic Camera & Monitor

WV-1400 B&W TV Camera
For CCTV, SSTV, etc. Sensitive 2/3" separate mesh vidicon (Type 20PE13A) pick-up tube. 525 lines/60 fields/30 frames, RS-170 or line locked sync system. 16mm, f1.6, C-mount lens, automatic light compensation for use under various light conditions. Video output: 1V p-p composite/75 Ohms. 3⅝"w × 3⅝"h × 8⅛"d, 3.7 lbs. 120vac/60Hz .... **SALE PRICE - $199.95**

TR-930 B&W TV Monitor
A compact, economical monitor for CCTV, SSTV, RTTY, Computers, etc. 9" diagonal screen with 700 lines resolution; produces sharp, detailed pictures. All controls conveniently located on front panel. Video input: 1.0V p-p., Hi-Z or 75 Ohms. 9"h × 8⅛"w × 9⅛"d, 11¼ lbs. 120vac/60 Hz ..... **SALE PRICE - $159.95**

Robot - SSTV

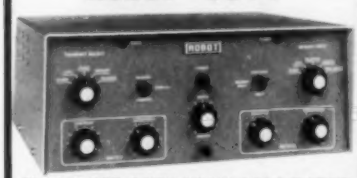

Model 400 SSTV SCAN CONVERTER
Regular $795 - ***Sale Price $679.95***
$100 Factory Rebate until May 31, 1982

Use your CREDIT CARD!

MasterCard · VISA

AMATEUR ELECTRONIC SUPPLY®
4828 W. Fond du Lac Avenue
Milwaukee, Wisconsin 53216
Phone: (414) 442-4200
Wisconsin WATS: 1-800-242-5195
Nationwide WATS: 1-800-558-0411
AES Branch Stores in: Clearwater, FL • Orlando, FL • Wickliffe, OH • Las Vegas, NV

✓See List of Advertisers on page 114

Orbit

ORBIT is the Official Journal for the Radio Amateur Satellite Corporation (AMSAT), P.O. Box 27, Washington, DC 20047. Please write for application.

For a **FREE SAMPLE COPY** please send $1 to cover First Class Postage and handling to: Orbit, 221 Long Swamp Road, Wolcott, CT 06716.

MOVING?

Let us know 8 weeks in advance so that you won't miss a single issue of 73 Magazine.
Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly. Write to:

73 magazine
Subscription Department
P.O. Box 931
Farmingdale NY 11737

☐ Address change only ☐ Payment enclosed
☐ Extend subscription
☐ Enter new subscription ☐ Bill me later
☐ 1 year $19.97 (Canada $22.97, Foreign $39.97/US funds)
Foreign air mail, please inquire.

If you have no label handy, print OLD address here.

AFFIX LABEL

Name _____ Call _____
Address _____
City _____ State _____ Zip _____

print NEW address here:

Name _____ Call _____
Address _____
City _____ State _____ Zip _____

The Electronic Breadboard

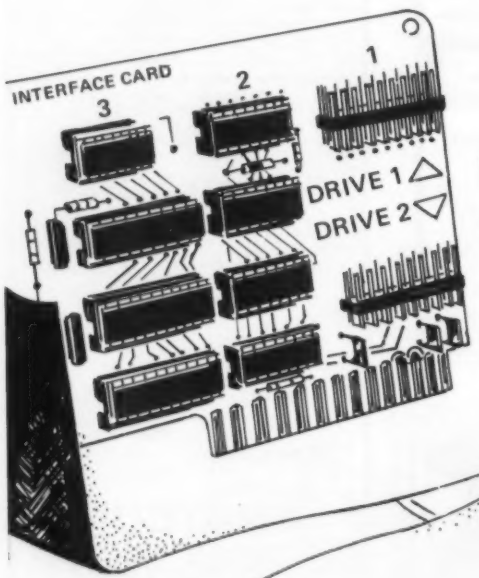

Computer Aided Design (CAD) is one of the newest of the applications of microcomputer technology. THE ELECTRONIC BREADBOARD permits the design and analysis of analog circuits. It can be used to evaluate voltages, currents, impedance and the frequency response of any circuit.

This package is ideal for audio component repairmen, ham radio technicians, hobbyists, electrical engineers, telecommunications engineers, audiophiles and students of electronics. Plug it in and slice away a lot of guesswork.

0287R-67 Model I & III level II 16K $49.95*

*Plus $2.50 shipping

Instant Software™
PETERBOROUGH, N.H. 03458

TO ORDER: See your local Instant Software dealer or call Toll-Free
1-800-258-5473 orders only
In New Hampshire 1-603-924-9471
Mon.-Fri. 8:00 am—4:30 pm E.S.T.

VISA

Better by the dozen.

1. **NEVER SAY DIE**—If you want controversy, Wayne Green W2NSD/1 will give it to you. His popular column ranges from travelogue to tirade and is guaranteed to entertain, inspire and enlighten you.

2. **DX**—This globe-trotting column keeps you informed about the news of the DX world from Kingman Reef to Bahrain.

3. **CONTESTS**—You get all the news on the contest world from Robert Baker WB2GFE. He'll give you information on upcoming events and results from recent contests.

4. **FUN**—Just for fun, John Edwards KI2U provides you with wacky puzzles, quizzes, and games that test your ham mettle.

5. **FCC**—If you're looking to the future, these outtakes from the Federal Register chronicle changes in policy and regulations that relate to amateur radio.

6. **RTTY LOOP**—To keep you abreast of radioteletype developments, Marc Leavey WA3AJR explains the new RTTY equipment, the increasing role of computers in RTTY, and other matters of interest to digital communications fans.

7. **REVIEWS**—Before you buy, save yourself some money . . . check *73*'s indepth evaluation of the latest gear.

8. **HAM HELP**—As a service to you, *73* prints your questions in our magazine. This helps you to obtain hard-to-get parts, schematics, and owner's manuals.

9. **SATELLITES**—From Phase III to TVRO, *73 Magazine* covers the news of the satellite world like no other radio amateur magazine.

10. **NEW PRODUCTS**—This brief look at the latest ham equipment on the market keeps you on top of new developments in amateur radio.

11. **AWARDS**—To find out what certificates are available where, read Bill Gosney KE7C's coverage of all the ham radio awards.

12. **CONSTRUCTION**—The builder's magazine . . . that's *73*. You get the best projects from the best authors every month.

Send me a dozen issues of

73 MAGAZINE
for the dozen reasons listed!

☐ 1 year, USA $19.97
☐ 1 year, CANADA, US funds $22.97
☐ 1 year, FOREIGN, Surface, US funds $39.97
☐ MC ☐ VISA ☐ AM. EXP. ☐ CHECK/MO

Name _____

Address _____

City _____ State _____ Zip _____

Card # _____ Exp. Date _____

Interbank # _____

Signature _____

Mail to:
73 Magazine Subscription Dept.
P.O. Box 931, Farmingdale, NY 11737 **32686**

73 MAGAZINE
FOR RADIO AMATEURS

Subscription Department
P.O. Box 931
Farmingdale, NY 11737

1-800-258-5473

For orders only please.
Foreign air mail, please inquire.

RADIO BOOKSHOP

Think Spring,

Think Antennas

VHF ANTENNA HANDBOOK—The new *VHF Antenna Handbook* details the theory, design, and construction of hundreds of different VHF and UHF antennas . . . a practical book written for the average amateur who takes joy in building, not full of complex formulas for the design engineer. Packed with fabulous antenna projects you can build. BK7368 $5.95.*

PRACTICAL ANTENNAS FOR THE RADIO AMATEUR—A manual describing how to equip a ham station with a suitable antenna. A wide range of antenna topics, systems, and accessories are presented giving the reader some food for thought and practical data for construction. Designed to aid the experienced ham and novice as well. Only BK1015 $9.95.*

73 DIPOLE AND LONG-WIRE ANTENNAS—by Edward M. Noll W3FQJ. This is the first collection of virtually every type of wire antenna used by amateurs. Includes dimensions, configurations, and detailed construction data for 73 different antenna types. Appendices describe the construction of noise bridges, line tuners, and data on measuring resonant frequency, velocity factor, and swr. BK1016 $5.50.*

ALL ABOUT CUBICAL QUAD ANTENNAS (2nd edition)—BK1196—The "Classic" on Quad design, theory, construction, and operation. New 2nd edition contains new feed and matching systems and new data. $5.95

BEAM ANTENNA HANDBOOK (New 5th edition)—BK1197—Yagi beam theory, construction and operation. Information on wire beams, SWR curves and matching systems. A "must" for serious DXers. $5.95

VHF HANDBOOK FOR RADIO AMATEURS—BK1198—Contains information on FM theory, operation and equipment, VHF antenna design and construction, satellite-EME, and the newest solid-state circuits. $6.95

THE RADIO AMATEUR ANTENNA HANDBOOK—BK1199—All about wire antennas, beams, tuners, baluns, coax, radials, SWR and towers. Clear and complete information. $6.95*

SIMPLE, LOW-COST WIRE ANTENNAS FOR RADIO AMATEURS—BK1200—All new data and everything you want to know about low-cost, multi-band antennas, inexpensive beams, "invisible" antennas for hams in "tough" locations. $6.95*

ALL ABOUT CUBICAL QUAD ANTENNAS (2nd edition)—BK1196—The "Classic" on Quad design, theory, construction, and operation. New 2nd edition contains new feed and matching systems and new data. $5.95*

Use the order card in this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop ● Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All orders add $1.50 handling first book, $1.00 each additional book, $10.00 per book foreign airmail. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address. (Prices subject to change on books not published by 73 Magazine.)

NEW From 73 MAGAZINE

THE 1982 EDITION
GENERAL LICENSE STUDY GUIDE

by Timothy M. Daniel N8RK

This is the complete guide to the General License. Learning rather than memorizing is the secret. This is not a question-and-answer guide that will gather dust when the FCC issues a new test. Instead, this book will be a helpful reference, useful long after a ham upgrades to General. Includes up-to-date FCC rules and an application form.
ORDER yours today and talk to the world.
SG7358 **$6.95**

*Use the order card on the Reader Service page of this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop•Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. Add $1.50 handling charge for the first book; $1.00 for each additional book. Questions regarding your order? Please write to Customer Service at the above address. Please allow 4-6 weeks for delivery.

FOR TOLL FREE ORDERING
CALL 1-800-258-5473

From 73 MAGAZINE

THE MOST UP-TO-DATE REPEATER ATLAS AVAILABLE!

WORLD Repeater ATLAS Repeater Repeater Repeater

INCLUDES:

- ***LISTINGS BY STATE AND COUNTRY***
- ***LISTINGS BY FREQUENCY***
- ***MAPS FOR EACH STATE***
- ***28 MHZ THROUGH 1296 MHZ***
- ***PERFECT FOR MOBILING***

•WORLD REPEATER ATLAS—BK7315—Completely updated, over 230 pages of repeater listings are indexed by location and frequency. More than 50 maps pinpoint 2000 repeater locations throughout the USA. Foreign listings include Europe, the Middle East, South America and Africa. $4.95.

IN STOCK AND READY TO SHIP

*Use the order card on the Reader Service page of this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop ● Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. Add $1.50 handling charge for the first book; $1.00 for each additional book. Questions regarding your order? Please write to Customer Service at the above address. Please allow 4-6 weeks for delivery.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

Radio Bookshop

NEW from 73

THE NEW WEATHER SATELLITE HANDBOOK

BY DR. RALPH E. TAGGART

Here is the completely updated and revised edition of the best-selling **Weather Satellite Handbook**—containing all the information on the most sophisticated and effective spacecraft now in orbit. Dr. Taggart has written this book to serve both the experienced amateur satellite enthusiast and the newcomer. The book is an introduction to satellite watching, providing all the information required to construct a complete and highly effective ground station. Not just ideas, but solid hardware designs and all the instructions necessary to operate the equipment are included. For the thousands of experimenters who are operating stations, the book details all procedures necessary to modify their equipment for the new series of spacecraft. Amateur weather satellite activity represents a unique blend of interests encompassing electronics, meteorology and astronautics. Join the privileged few in watching the spectacle of earth as seen from space on your own monitoring equipment. **Order BK7383 $8.95**

SAVE $2.95

WEATHER SATELLITE HANDBOOK (first edition)

By Dr. Ralph E. Taggart WB8DQT. Valuable information in this first edition *is not included* in Dr. Taggart's just published book, **The New Weather Satellite Handbook** (see above). Chapters such as "How to Build an Electric Timer for Satellite Tracking" and "Building an Automatic Control for the Satellite Receiving Station" will no longer be available when this edition is out of print. This is a good entry level text for those discovering the exciting new use of weather satellites. Regular price: $4.95. **SPECIAL PACKAGE PRICE--BOTH BOOKS FOR ONLY $10.95, SAVE $2.95!** (This offer available only while supplies last.) Order WS7300 and receive both editions of the Weather Satellite Handbook for only $10.95 (plus $1.00 shipping and handling charge).

*Use the order card in this magazine or itemize your order on a separate piece of paper and mail to: 73 Radio Bookshop ● Peterborough NH 03458. Be sure to include check or detailed credit card information. Add $1.50 first book, $1.00 each additional book, $10.00 per book foreign airmail. Note: Prices subject to change on books not published by 73 Magazine. Questions regarding your order? Please write to Customer Service at the above address. Please allow 4-6 weeks for delivery. No C.O.D. orders accepted. For Toll Free ordering call 1-800-258-5473.

MAKE MONEY . . . $ELL 73 MAGAZINE

Selling 73 Magazine, the ham radio magazine that offers quality and quantity, brings the ham into your store. Once through the door you can sell him anything.

Our dealers are telling us that "73" outsells them all . . . so call today and join the dealers who make money with 73 Magazine.

For information on selling 73 Magazine call 603-924-9471 and speak with Ginnie Boudrieau, our Bulk Sales Manager. Or write to her at:

73 MAGAZINE
80 Pine Street
Peterborough NH 03458

SYNTHESIZED SIGNAL GENERATOR



MADE IN USA

MODEL SG1000 $349.95 plus shipping

• Covers 100 to 185 MHz in 1 kHz steps with thumbwheel dial • Accuracy 1 part per 10 million at all frequencies • Internal FM adjustable from 0 to 100 kHz at a 1 kHz rate • Spurs and noise at least 60 dB below carrier • RF output adjustable from 5-500 mV at 50 ohms • Operates on 12 Vdc @ 1/2 Amp • Available for immediate delivery • $349.95 plus shipping • Add-on Accessories available to extend freq. range, add infinite resolution, voice and sub-audible tones, AM, precision 120 dB calibrated attenuator • Call for details • Dealers wanted worldwide.

VANGUARD LABS ↩311
196-23 Jamaica Ave., Hollis, NY 11423
Phone: (212) 468-2720

C.B. SPECIAL
(Repeat of a sell out)

CONVERT THESE TO 10 METER FM

New Hy-Gain 40 channel printed circuit boards assembly (Squelch pot, volume control and channel switch not included) Boards sold as is. Dimension 6" X6"

1-9 pcs $7.50 ea.
10-49 pcs $6.50 ea.
(While quantities last)

REMOTE 40 CHANNEL C.B.

Remotes have a metal frame. Speaker, plastic case, and control mic not included. Sold as is.

$14.95 ea

C.B. BARGAIN

C.B. boards missing parts or damaged. Can be used for spare parts. Buy several!!

$3.50 ea

Order information: Please add $4.00 for S/H via UPS. COD's accepted for orders totaling $50.00 or more. Florida residents add 4% sales tax. Minimum order $15.00. Foreign orders US funds only add 20% for S/H. MASTER CARD and VISA accepted.

Surplus Electronics Corp.
7294 NW 54th St.
Miami FL 33166 ↩69
P.H.# 305-887-8228

Subscription Problem?

73 Magazine does not keep subscription records on the premises, therefore calling us only adds time and doesn't solve the problem.

Please send a description of the problem and your most recent address label to:

73 Magazine
Subscription Dept.
PO Box 931
Farmingdale, NY 11737

Thank you and enjoy your subscription.

Take your favorite H.T. out for a drive tonight.

VISA or MASTERCARD for same day shipment.

For $69.95 you get the most efficient, dependable, fully guaranteed 35W 2 meter amp kit for your handy talkie money can buy.

Now you can save your batteries by operating your H.T. on low power and still get out like a mobile rig. The model 335A produces 35 watts out with an input of 3 watts, and 15 watts out with only 1 watt in. Compatible with IC-2AT, TR-2400, Yaesu, Wilson & Tempo! Other 2 meter models are available with outputs of 25W and 75W, in addition to a 100W amplifier kit for 430MHZ. ↩382

Communication Concepts Inc. 2648 N. Aragon Ave., Dayton, OH 45420 (513) 296-1411

PRESERVE 73 MAGAZINE BINDERS & FILE CASES

Keep your issues of 73 Magazine together, handy and protected in handsome and durable library files or binders. Both styles bound in red leatherette with the magazine logo stamped in gold.

Files: Each file holds 12 issues, spines visible for easy reference. $5.95 each, 3 for $17.00, 6 for $30.00

Binders: Each binder holds 12 issues and opens flat for easy reading. $7.50 each, 3 for $21.75, 6 for $42.00

(Postage paid in USA. Foreign orders include $2.50 per item)

Please state years: 1977 to 1983
Send check or money order to:
JESSE JONES BOX CORP.
P.O. Box 5120
Philadelphia, PA 19141
Allow 4 to 6 weeks for delivery

NEMAL ELECTRONICS
COAXIAL CABLE SALE

This Month's Specials

Same Day Shipping

RG8U mil spec 96% shield $27.95/100 ft. 31¢/ft.
RG214U dbl silver shield, 50 ohm $1.35/ft.
100 ft. RG8U with PL-259 on each end $19.95
BELDEN Coax in 100 ft. rolls
RG58U #9201 $11.95
RG8U #9208 $24.95
Grounding strap, heavy duty tabular braid
3/16 in. tinned copper 10¢/ft.
3/8 in. tinned copper 30¢/ft.

POLYETHYLENE DIELECTRIC

RG213 noncontaminating 95% shield mil spec. 36¢/ft.
RG174/U mil spec. 96% shield 10¢/ft.
RG11U 96% shield, 75-ohm mil spec. 25¢/ft.
RG8U 96% shield, mil spec. 31¢/ft.
RG6A/U double shield, 75-ohm 25¢/ft.
RG58A/U stranded mil spec. 12¢/ft.
RG58 mil spec. 96% shield 11¢/ft.

LOW LOSS FOAM DIELECTRIC

RG8X 95% shield (black, white or gray) $14.95/100 ft. 17¢/ft.
RG8U 80% shield 18¢/ft.
RG58U 80% shield 07¢/ft.
RG58U 95% shield 10¢/ft.
RG59U 100% foil shield, TV type $7/100 ft. 10¢/ft.
RG8U 97% shield 11 ga. (equiv. Belden 8214) 31¢/ft.
Rotor Cable 8-con. 2-18 ga, 6-22 ga 19¢/ft.

CONNECTORS MADE IN USA

Amphenol PI-259 79¢
PL-259 push-on adapter shell 10/$3.89
PL-259 & SO-239 10/$5.89
Double Male Connector $1.79
PL-258 Double Female Connector 98¢
1 ft. patch cord w/RCA type plugs each end 3/$1.00
Reducer UG-175 or 176 10/$1.99
UG-255 (PL-259 to BNC) $3.50
Elbow (M359) $1.79
F59A (TV type) 10/$2.15
UG 21D/U Amphenol Type N Male for RG8 $3.00
BNC UG88C/U, male $1.25
3/16 inch Mike Plug for Collins etc $1.25
UG273 BNC to PL-259 $3.00

FREE CATALOG
COD add $1.50—FLA. Res. add 4% Sales Tax

Connectors—shipping 10% add'l, 2.50 minimum
Cable—shipping $3.00 1st 100 ft., $2.00 each add'l 100 ft.

5685 SW 80th. Street Dept. RLO Miami, Fl. 33143 Call (305) 661-5534 ↩412

this publication is available in microform

University Microfilms International

300 North Zeeb Road
Dept. P.R.
Ann Arbor, MI 48106
U.S.A.

18 Bedford Row
Dept. P.R.
London, WC1R 4EJ
England

GO MOBILE WITH YOUR H.T.!

Model I—Icom IC-2A/T, Etc.
Model K-1 for TR-2500
—slides on bottom of radio

Guaranteed!

Model K—TR-2400;
—powered thru battery plug
Model N—FT-208R
Model T—Simple mod for Tempo

NOW FOR FT-208R & TR-2500

Model Y—FT-207R,
—fits into battery compartment

A unique battery eliminator HANDI-TEK Regulator allows constant hand-held operation from auto DC or base supply with no nicad drain and WITHOUT RADIO MODIFICATION! $24.95 PPD in USA. CA add $1.50 Sales Tax.

460

HANDI-TEK
P.O. BOX 2205, LA PUENTE, CA 91748

DIGITAL DISPLAY



NEW YAESU CONVERTED FRO FT101 FR101 TS520 TS900. PLUG INTO EXTERNAL VFO JACK AND GO. 5 ACTIVE DIG TO 10HZ. REAR PANEL 10HZ DEFEAT SWITCH. 3/8" RED LED. 1 3/8H. 4 1/2 W. 6 1/2.
SEND MOD. NO. + US MO $120 EXTERNAL VFO USED: ADD $5 FOR DOUBLE PLUG/JACK.
ALSO WORK ON FT620B FT221 R599 T599 HW101 SB102 ETC. WRITE FOR INSTALLATION INFO. WITH MOD. SER. NO. FT620B UNIT WITH KIT $125 INCLUDES ALL PARTS, INFO.
DUTY & POST PAID. 6 MOS. WARR.

GRAND SYSTEMS 20352 40A AVE
LANGLEY BC CANADA V3A2Y8
(604) 530-4551 132

SUPER LOW PRICES!

AZDEN PCS-3000 2-METER	$279.00
AZDEN PCS-300 2-METER HT	$285.00
SANTEC 144UP 2-METER HT	$289.00
SANTEC 440UP HANDHELD	$319.00
KENWOOD 2500 HANDHELD	$299.00
YAESU FT-208R 2-METER HT	$309.00
YAESU FT-708R 440 HT	$329.00
TEMPO S-15 2-METER HT	$249.00
TEMPO S-2 220 HT	$249.00

ALL KENWOOD & ICOM HF RIGS 12% OFF.
ALL LARSEN 2-METER ANTENNAS 15% OFF.
ALL YAESU & TEN-TEC HF RIGS 15% OFF.
ALL HYGAIN & HUSTLER ANT. 30% off.
ALL MFJ PRODUCTS 15% OFF LIST.
RADIOS, ANTENNAS & ACCESSORIES ARE IN NEW, FACTORY SEALED CARTONS. FULL MANUFACTURERS WARRANTY. PRICES CASH & SHIPPING. CREDIT CARDS ADD 3%.

SHAVER RADIO, INC.
1378 S. Bascom Ave. San Jose, Calif. 95128
408-998-1103 148

CB TO TEN METER CONVERSION KITS

KITS for AM—SSB—FM 40 Channel PLL chassis conversions
DETAILED INSTRUCTIONS for easy installation with minimum time and equipment
BAND COVERAGE flexibility provides up to 1 MHz coverage for most PLL chassis.
PRICES Low cost prices range from $8.00 to $50.00
All kits are in stock including several different FM kits.
FREE CATALOG Write or call today.

78 **INDEPENDENT**
CRYSTAL SUPPLY COMPANY
P.O. Box 183
Sandwich, Ma. 02563-0183
(617) 888-4302

THE PROFESSIONAL
TOUCH TONE ENCODER

An ultra high quality encoder for professional application. Absolute reliability and function makes the difference. There's a Pipo encoder for every system and application. Totally serviceable, easy to operate and install. *Call or write for free catalog and information!* (213) 852-1515 or P.O. Box 3435, Hollywood, CA 90028.

PATENTED • AT&T

Pipo Communications®
Emphasis is on Quality & Reliability 300

RED HOT SPECIALS!

AZDEN PCS-3000 2-meter Transceiver	$283.00
AZDEN PSC-300 Handheld Transceiver	283.00
KDK 2025A MK II w/TT mike	265.00
JANEL QSA-5 2-meter Preamp	36.50
BEARCAT 210XL Scanner	215.00
KANTRONICS Mini Codereader Pkg.	247.00
All MFJ ITEMS	12% off list price
TEN-TEC Argosy HF Transceiver	465.00
TEN-TEC Delta HF Transceiver	738.00
TEN-TEC Omni C HF Transceiver	1040.00
New SANTEC 144 2-meter Handheld	297.00
New SANTEC 440 Handheld	327.00
TOKYO Hy Power 2M Amp HL-32V	75.00
KANTRONICS F.D. II Codereader	360.00
AZDEN PCS 2800 10M FM	283.00
RINGO RANGER ARX 2B	33.00

Ben Franklin Electronics
115 E N Main Hillsboro KS 67063
316-947-2269 439

TR-2400 Automatic Band Scanner
for Kenwood TR-2400 stops and locks on busy, or stops and resumes when carrier drops. Controlled by keyboard, no switches to add. Installs easily inside rig, six simple connections, no modifications. Does not use space provided for PL.
Assembled—$24.95 Kit—$14.95

TR-9000 Memory Scanner
for Kenwood TR-9000 scans 5 memory channels. Stops on busy and resumes when carrier drops. Uses existing controls. No switches to add. Installs easily inside rig. See product review Sept. issue *73 Magazine*.
Assembled—$39.95

IC-280 Band Scanner—$29.95
Memory Scanner—$39.95 both for $59.90
* Scanners do not affect normal rig operation.
* Digital readouts display scanned frequency.
* All scanners are easy to install using complete and detailed installation instructions.
* All scanners ASSEMBLED & TESTED (except kit)
* Satisfaction Guaranteed!

Send check or money order to:

ISCAN

26148 W. Mary Ann Rd., Antioch, IL 60002

include $1.50 postage & handling
Illinois res. include 5¼% state tax 27

S-LINE OWNERS
ENHANCE YOUR INVESTMENT

with

TUBESTERS™

Plug-in, solid state tube replacements

- S-line performance—solid state!
- Heat dissipation reduced 60%
- Goodbye hard-to-find tubes
- Unlimited equipment life

TUBESTERS cost less than two tubes, and are guaranteed for so long as you own your S-line.

433

SKYTEC
Box 535
Talmage, CA 95481

Write or phone for specs and prices.
(707) 462-6882

SHERWOOD

R-4C+SHERWOOD CRYSTAL FILTERS
STILL THE FINEST COMBINATION

600 HZ LOW-LOSS 1st-IF CW FILTER. Improve early-stage selectivity. Eliminate high-pitched leakage around 2nd-IF filters. Improve ultimate rejection to 140 dB. Eliminate strong signals overloading 2nd mixer, causing intermod and desensitization. CF-600/8: $80.00. New PC board relay switch kit: $45.00.

1st-IF SSB FILTERS. 140 dB ult. rej. CF-2K/8: $150.00 pair.

6kHz 1st-IF FILTER. Reduces hi-pitched QRM. CF-6K/8: $80.00

16-POLE R-4C SSB! Plug-in filter. Unexcelled skirt selectivity. 1800 Hz at -6 dB, 2400 Hz at -60 dB. CF-2K/16: $135.00.

250, 500 and 1000 Hz 8-POLE 2nd-IF PLUG-IN FILTERS. CF-250/8, CF-500/8 and CF-1.0K/8: $80.00.

PC Board mod. and switching kits. Special AM filters/detector.

Filters also for R-4 (B), R-7, TR-7, TR-4, Signal/One, Atlas.

Add $3 shipping per order; $6 overseas air.

Europeans: Ingelmpex, Postfach 24 49, D-8070, Ingolstadt, W. Germany.

Sherwood Engineering Inc.
1268 South Ogden St. 147
Denver, Colo. 80210
(303) 722-2257

See List of Advertisers on page 114

BULLET ELECTRONICS

P.O. BOX 401244E GARLAND, TX 75040 214/278-3553 ✓12

7 Watt Audio Amp Kit $6.95

SMALL, SINGLE HYBRID IC AND COMPONENTS FIT ON A 2" x 3" PC BOARD (INCLUDED). RUNS ON 12VDC. GREAT FOR ANY PROJECT THAT NEEDS AN INEXPENSIVE AMP. LESS THAN 3% THD @ 5 WATTS. COMPATIBLE WITH SE-01 SOUND KIT.

Doomsday Alarm Kit $9.95

If you have trouble sleeping and you would like the rest of the neighborhood to share your misery then this little kit will be for you! There is no way to accurately describe the unearthly howls, screams and tones that come out of this kit. Four separate tone oscillators are mixed, cancelled and stepped at a varying rate. 10 Watts of crazy sounds. A great fun kit or a practical burglar alarm. Complete with PC board and all necessary components less speaker. For 6-12 VDC. ORDER DA-02

New! 3TZ Time Zone Clock Kit

Microprocessor ROM clock kit keeps local time (12 hour format), and 2 world time zones (24 hour format). Large .6" ORANGE readouts. 10 min. IO timer for HAMS. Comes complete with attractive plastic case and wallplug XF-MR

- 4 Digit Disp. min. vers.
- Quartz 4TAL Time Base
- 1 Time Zone (Selectable)
- Battery backup
- Feathertouch front panel switches
- Quality silkscreened and plated PC boards
- Seconds Reset Hold feature

$54.40

Overvoltage Protection Kit $6.95

Protect your expensive equipment from overvoltage conditions. Every computer should have one! **Works with any fused DC power source** from 10 to 20 volts up to 25 amps.

Sound Effects Kit $18.50

The **SE-01 Sound Effects Kits has** all you need to build a programmable sound effects machine except a battery and speaker. Only the SE-01 provides you with additional circuitry that includes a **Pulse Generator, Mux Oscillator and Comparator** to make more complex sounds a snap. **Includes TI78477**, (w/specs) assembly instructions and programming examples. You can easily create **Gunshots, Explosions, Steam Trains, Wind & Surf** and much more.

Complete Kit $18.50
With quality PC Board (Less battery & spkr.)
78477 Chip is included
Extra chips $3.15 ea.

ELECTRONIC MUSIC MAKER

THIS UNIQUE KIT CONTAINS A MICROPROCESSOR CHIP WITH ROM. IT HAS BEEN PROGRAMMED TO PLAY THE FIRST 6 TO 10 NOTES OF THE TUNES LISTED BELOW. CONSTRUCTION IS SIMPLE, WORKS WITH ANY 8 OR 16 OHM SPKR (NOT INCLUDED).

THE KIT WILL OPERATE ON 9VDC OR 12VAC WITH OPTIONAL TRANSFORMER. (CONVERTS TO 117VAC). ALL COMPONENTS & BOARD

Complete Kit $16.95 Transformer $1.35

Tunes: Toreador * Without Tell * Hallelujah Chorus * Star Spangled Banner * Yankee Doodle * America * Deutschland Lied * Wedding March * Beethoven's 5th and 9th * Mel's Bells * La Vom En Rose * Star Wars Theme * Clementine * Augustine * Jingle Bells * God Save The Queen * Colonel Bogey * Marseillaise * O Sole Mio * Santa Lucia * The End * Blue Danube * Brahms Lullaby * Westminster Chime * Simple Chime * Descending Octave Chime

Regulator Card Kit $14.95

This is the Regulator Card from our famous **20A Power Supply Kit**. Although we ran out of the transformers and heatsinks, many customers have been able to locate their own. The regulator card performs the actual voltage regulation and has adjustable fold back current limiting. Output voltage is **stable to 3000MV from 0 to 20 Amps and adjustable from 11 to 14 Volts.** Designed to drive 2 high current NPN transistors (2N3771, 2N5301 or equiv.) The unit assembles quickly. Included are all the on board components including a driver transistor and over-temp shutdown sensor. Designed to screw down to a standard 3" diameter computer grade filter cap. The quality plated PC card is 3-1/2" x 4 3/4".

REGULATOR CARD KIT	**$14.95**
HIGH CURRENT PARTS	
(2 - 2N3772 & 25A Bridge)	$5.00
51,000 MFD @ 40V Computer Grade	$3.50

Requires Transformer with 16 - 19 VAC Out @ The Current You Expect To Draw.

THE SUPER MUSIC MAKER KIT REVISION 2 - $24.95

Now you can play hundreds of songs using the Bullet **Super Music Maker**. The unit **features a single factory programmed microprocessor IC** that comes with 20 pre programmed short tunes. By adding the additional PROMS (2708's) the system can be expanded to play up to **1000 notes per PROM**. The kit comes with **all electronic components (less the PROM)**, and a drilled plated and screened PC Board which measures 4" x 4½". The **7 watt amplifier** section is on the same PC board and drives an 8 ohm speaker (not included). Since the unit works on **12 VDC** or **12 VAC** vehicle or portable operation is possible. **What do you get for $24.95?** Everything but a speaker, transformer, case, switches, and PROM. Additional 2708 PROM's (blank) containing popular tunes are available for **$9.95** each. Lists of available PROM albums are available on request.

DIP Sockets One 8 pos. One 5 pos. (Can be directly soldered to PC Bd. to access tunes)	2.50/Set
Rotary Switches Two 5 position (For remote wiring to PC Bd. to access tunes)	2.50/Set
Attractive Tan Plastic Case	6.50
Wallplug Transformer (For operation on 117VAC house voltage)	3.00

ORDERING INFORMATION:
Call or Write For Free Catalog

- COD MINIMUM $20.00 • ADD $2.50 FOR COD'S
- UPS DELIVERY ADDRESS MUST ACCOMPANY ALL COD ORDERS
- $1.00 HANDLING ON ORDERS UNDER $10.00
- VISA, MC CARDS OR CHECK
- ADD 6% FOR SHIPPING
- TEXAS RESIDENTS ADD 5% STATE SALES TAX
- ALL FOREIGN ORDERS ADD 25% FOR SHIPPING (CANADA 15%) NO FOREIGN COD'S
- CALL (214) 278-3553 TO PLACE CREDIT CARD OR COD ORDER

INVENTORY CLEARANCE

CA3080 TRANS COND AMP	.85
TLO-82 DUAL BI-FET AMP	.98
CD4566 CMOS - 50/60 CNTR	.98
MC3301 QUAD OP AMP (HSE #)	.44
FPT500 PHOTO TRANSISTOR	.44
TIP 110 NPN DARL. 2A IC	.88
TEMP CONTROLLED HOTPLATE	
5"x10" TEMPERED GLASS 110°F to 160°F	1.88
3850 (F8) MICRO P CHIP	2.85
10103 SENSITIVE GATE SCR	3/.88

Start the new year right...the saving way!

DUAL PHOTO RESISTOR 3.8" DIA	3/.44
AY 3-8910 SOUND EFFECTS	11.88
60 PAGE MANUAL FOR ABOVE	2.00
JUMBO RED LED ASST. STYLES	20/1.00

SUPER SPECIAL DEAL!
STANDARD C-60 CASSETTE NEW IN PLASTIC CASES. TOP QUALITY. ORIG. USED IN DIGITAL APP. FREQ. RESPONSE 300HZ - 10KHZ
1.39 ea. 3/3.50

RF MODULATORS

Small Size 3⅛ x 3 x 1¼ Only **49.95**

- CRYSTAL CONTROLLED FOR STABILITY
- IC CIRCUITRY FOR EXCELLENT RELIABILITY
- EXTERNALLY SWITCHED FOR CHANNELS 3 or 4

The VM-1000 RF Modulator is the same type and quality of those found in todays video tape recorders. It has convenient phono jacks for video and audio inputs and has a standard "F" type connector for RF output. Power is supplied by an AC to DC power pack which is included. Call NOW for more information and for quantity discounts.

JJT DISTRIBUTING ✓25
17210 Yukon Ave., Suite #1
Torrance, Calif. 90504
Call COD Orders to: (213) 515-6800

IT'S INCREDIBLE!

CODE QUICK

Master code or upgrade in a matter of days. **Code Quick** is a unique breakthrough which simplifies learning Morse Code. Instead of a confusing maze of dits and dahs, each letter will magically begin to call out its own name! Stop torturing yourself! Your amazing kit containing 5 power-packed cassettes, visual breakthrough cards and original manual is only **$39.95!** Send check or money order today to WHEELER APPLIED RESEARCH LAB, P.O. Box 3261, City of Industry, CA 91744. Ask for **Code Quick #103**, California residents add 6% sales tax.

One User Comments:
"First new idea in code study and the darn thing works! So much fun you don't realize how much you're learning."
M.S. Greneda, Miss.

Hundreds of satisfied customers!
You can't lose! Follow each simple step. You must succeed or return the kit for a total immediate refund!

SURGE SHUNT

protects solid state communications equipment from damage caused by high-voltage transients entering the antenna system

These transients usually are caused by atmospheric static discharges or nearby lightning strikes.

The new **Model 1549 Surge Shunt** can be used with both receivers and transceivers having up to 200 watts output. Convenient UHF type coaxial connections are supplied. Price is **$24.95**

The arrester "pill" element has a long life, but can be easily and economically replaced if necessary.

Credit-Card buyers may call toll free
1-800-543-5612

In Ohio, or for information call:
1-513-866-2421

DRAKE

R. L. DRAKE COMPANY
540 Richard Street, Miamisburg, Ohio 45342

INSTITUTIONAL AND DEALER INQUIRIES INVITED.

Your Ham Tube Headquarters!

TOLL 800-221-0860 FREE
TUBES

3-400Z	$85.00	6883B	6.75
3-500Z	$95.00	7360	9.15
4-400A	$80.00	7735A	29.50
4CX250B	$50.00	8122	79.50
572B	$38.00	8156	10.95
811A	$12.00	8643	$72.50
813	$35.00	8673	$72.50
8146B	$6.50	8874	180.00
8360	$4.95	8877(3CS1500A)	450.00
		8908	10.50

E.F. JOHNSON Sockets for 4CX250B & 4-400A ea. $9.95

SEMICONDUCTORS		RF CONNECTORS	
MRF 245/SD1416	$30.00	PL 259	10/$4.95
MRF 454	$18.95	PL 258	10/$8.95
MRF 455	$12.50	UG 175/176	10/$1.60
		UG 255/U	$2.50 ea.
MRF 644/SD1088	$19.95	UG 273/U	$2.25 ea.
2N3055	$ .95	M 358	$2.50 ea.
2N6084	$12.50	M 359	$1.75 ea.
		Type "N" twist-on (RG8/U)	$4.75

TOP BRAND Popular Receiving Tube Types
FACTORY BOXED 75/80% OFF LIST
FREE LIST Available
Includes full line of RF Power Transistors.
Minimum Order $25.
Allow $3.00 Minimum for UPS Charges
Write or phone for free catalog.
TUBES—BOUGHT, SOLD AND TRADED

CeCo Since 1922

Premium Prices Paid For EIMAC Tubes

COMMUNICATIONS, Inc.
2115 Avenue X
Brooklyn, NY 11235
Phone (212) 646-6300 ✓92

YAESU FT-207R OWNERS

AUTO SCAN MODULE AND BATTERY SAVER KIT

15 minutes to install; scan restarts when carrier drops off; busy switch controls automatic scan on-off; includes module and instructions.

Model AS-1. $25.00

WRITE FOR CLUB DISCOUNTS

Now a new improved

FT-207R BATTERY SAVER KIT MODEL BS-1 $14.95

- *No more dead batteries due to memory back-up
- *30% less power drain when squelched
- *Simple to install; step-by-step instructions and parts included
- *4 mA memory backup reduced to 500 μA.
- *45 mA receiver drain reduced to 30 mA.
- *Improved audio fidelity and loudness

ENGINEERING CONSULTING
P.O. Box 3966 ✓400
ANAHEIM, CALIFORNIA 92803

AMATEUR TELEVISION MAGAZINE

115

"FOR THE SPECIALIZED COMMUNICATION RADIO AMATEUR"

	Surface U.S./Canada Mexico	Surface All Foreign	Airmail Central S. America	Airmail All Other Foreign
½ year	$ 10.00	$ 13.00	$ 20.00	$ 23.00
1 year	$ 20.00	$ 26.00	$ 40.00	$ 46.00
2 year	$ 38.00	$ 50.00	$ 78.00	$ 90.00
3 year	$ 56.00	$ 74.00	$116.00	$134.00

ATV·SSTV·FAX·RTTY·Satellites·EME
Microwave and Computers

Published 12 times per year by Mike Stone WB9QCD
P.O. Box H, Lowden, Iowa 52255 0408

NEW AUTOPATCH

Now at last, an autopatch desiged for the sophisticated FM Amateur. **"Private Patch"** works through existing repeaters as well as simplex. Gives you access to your home phone within the coverage area of any selected repeater. **"Private Patch"** requires no modifications to your base FM transceiver. Connects only to MIC and speaker jacks. Conversation is very natural because **"Private Patch"** does not use the sampling technique. CW ID sends your call. Five digit owner programmable access code and operator/long distance inhibit protect your phone bill. Self contained AC supply. No tone encoders required. All CMOS digital logic, no analog timing used. Compare our standard features. Send for additional information. Available in spring.

AUTO CONNECT
Box 4155
Torrance, CA 90510

130

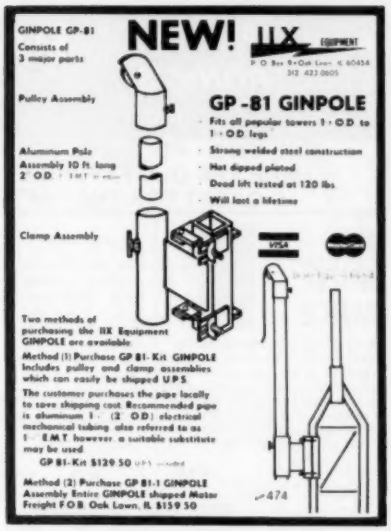
GINPOLE GP-81
Consists of 3 major parts
Pulley Assembly
Aluminum Pole Assembly 10 ft long 2" OD
Clamp Assembly
NEW!
IIX EQUIPMENT
GP-81 GINPOLE
Fits all popular towers 1-OD to 1-OD legs
Strong welded steel construction
Hot dipped plated
Dead lift tested at 120 lbs
Will last a lifetime
VISA
Two methods of purchasing the IIX Equipment GINPOLE are available
Method (1) Purchase GP 81-Kit GINPOLE Includes pulley and clamp assemblies which can easily be shipped UPS
The customer purchases the pipe locally to save shipping cost. Recommended pipe is aluminum 1-(2 OD) electrical mechanical tubing also referred to as 1-EMT however a suitable substitute may be used
GP 81-Kit $129.50
Method (2) Purchase GP 81-1 GINPOLE Assembly Entire GINPOLE shipped Motor Freight F.O.B. Oak Lawn, IL $159.50
474

AMP LETTER

(AMP LET TER) n. 1. An Amateur Radio publication devoted to the design, construction, and operation of Amateur Amplifiers. 2. A newsletter that can save you money on your next amplifier construction project. 3. A source of parts and information.

The AMP-LETTER is published and mailed First Class every three weeks (17 times/year). It is organized into five departments:

I Editor's Corner
II Letters
III Tech Topics & Tips
IV Feature Article
V AMP-LETTER TRADER

Have parts to sell? Run an ad in the AMP-LETTER TRADER. Subscriber rate is 10¢ per word.

The AMP-LETTER believes that homebrewing an amp can be fun, educational, and half as costly as buying a commercial amp.

A one year subscription to the AMP-LETTER is $18.00/year (17 issues). Mention "73" Magazine and you may subscribe at the special one time rate of $15.00/year.

DON'T MISS A SINGLE ISSUE OF THE AMP-LETTER

AMP-LETTER
RR2 Box 39A
Thompsonville, IL 62890

Place an ad, 10¢/word

Send $2.00 for a sample copy, or $15.00 for a full year of the AMP-LETTER.

97

NEW DX ANTENNAS

QUALITY - ECONOMY

WE MANUFACTURE:
MONOBAND YAGI BEAMS
TRI BAND YAGI BEAMS
CENTER INSULATORS - BALUNS
DUMMY LOADS - AND MORE!

All DX products are fully guaranteed. Send large S.A.S.E. for free catalog. Dealer inquiries are welcome.

DX Signal Co.
P.O. BOX 37, Lacon, IL 61540
Phone (309)246-2087

SAVE 90%

YES you can save up to 90% on a computer system of your own.

$150.00 buys a 4MHz Z80A with 64KB & a real Front Panel

$200.00 buys a Full Function 24x80 CRT with Keyboard

You can have your own computer and be running Fortran, Basic, Pascal, etc. If you get our

FREE BROCHURE
TODAY

DIGATEK CORP.
Suite 50A
2723 W. Butler Dr.
Phoenix AZ 85021

ROLL-YOUR-OWN TECHNOLOGY AND SAVE A BUNDLE

144

CERTIFIED INTERNATIONAL

NO HUGE AD--JUST SAVINGS FOR YOU
ON

CUSHCRAFT, HUSTLER, LARSEN, UNADILLA, BELDEN, COPPERWELD, SIGNALCRAFTER, PALOMAR, NYE VIKING, TRIONYX, TRAC, JANEL, BENCHER, VIBROPLEX, AMPHENOL, GOULD, DURACELL, WELLER AND OTHERS.

QSL'S CUSTOM MADE ALL CRYSTALS from $4.00

CB to 10 Meter Conversions
by CERTIFIED COMMUNICATIONS

your rig from $45: Now from us from $179

SEE US AT OVER 70 SHOWS A YEAR, CALL OR WRITE FOR QUOTE, CATALOG, INFORMATION, QSL SAMPLES (50 cents)

CALL COLLECT TO ORDER
Check the prices in this magazine and then call--on Cushcraft, Hustler and Larsen,
WE WILL NOT BE UNDERSOLD

SEE YOU AT GRAND RAPIDS, PRINCETON, SANTE FE PARK AND MIDLAND.

321

IT'S WORTH YOUR WHILE TO CALL OR WRITE

CERTIFIED INTERNATIONAL

NUTS & VOLTS

BUY • SELL • TRADE ELECTRONICS

Have Your Own
PERSONAL
ELECTRONIC SWAPMEET
Delivered Every Month
ONLY $5.00 IN U.S.
FOR 12 Issues OF
Nuts & Volts Magazine

Send To:
NUTS & VOLTS
P.O. BOX 1111-G
PLACENTIA, CA 92670
(714) 632-7721

137

DX-Notes

*2000+ DXCC Band/Mode Countries!
*SEVEN wide Worked/Confirmed Columns!
*Log the entire DX Callsign!
*YOU Designate the Modes and Bands!

PLUS *Buro! *3rd Party! *Reciprocal Licensing!
*Space to enter YOUR World Atlas page #
*IARU Continent! *ITU Zone! *CQ Zone!
*Unique "Rareness" Rating!
*Latitude! *Longitude!

PLUS Info computed for YOUR QTH!
*Time Zone Difference! *Propagation Factor!
*Distance in Kilometers! *Distance in Miles!
*EXACT Beam Headings - Including DX to You!

PLUS Complete Prefix and Name Guides!
1200+ Prefixes are cross-referenced!
400+ Countries are indexed alphabetically!

DX-Notes do the work - YOU do the DX-ing!

SEND Call, Name, Address, Time Zone, QTH Info (Latitude & Longitude OR Direction & Distance From a nearby town To Your QTH) and $12.50PPd

TO: Randall Sherman KH6MD (808) 877-7371 (18-02Z)
PO Box 158 " 879-4080 (04-17Z)
Kahului, Maui, Hawaii 96732 VISA MC

147

See List of Advertisers on page 114

RAMSEY ELECTRONIC'S Inc.

PARTS WAREHOUSE

We now have available a bunch of goodies too good to bypass. Items are limited so order today

2575 Baird Rd.
Penfield, NY 14526
716-586-3950

Call Your Phone Order in Today

TERMS: Satisfaction guaranteed or money refunded. C.O.D. add $2.00. Minimum order $6.00. Orders under $10.00 add $1.50. Add 5% for postage, insurance, handling. Overseas add 15%. N.Y. residents add 7% tax.

MINI KITS - YOU HAVE SEEN THESE BEFORE NOW HERE ARE OLD FAVORITE AND NEW ONES TOO. GREAT FOR THAT AFTERNOON HOBBY.

FM MINI MIKE

A super high performance FM wireless mike kit! Transmits a stable signal up to 300 yards with exceptional audio quality by means of its built in electret mike. Kit includes case, mike, on-off switch, antenna, battery and super instructions. This is the finest unit available.

FM-3 Kit **$14.95**
FM-3 Wired and Tested **19.95**

Color Organ

See music come alive! 3 different lights flicker with music. One light each for high, mid-range and lows. Each individually adjustable and drives up to 300 W. runs on 110 VAC.

Complete kit, ML-1 **$8.95**

Video Modulator Kit

Converts any TV to video monitor. Super stable, tunable over ch. 4-6. Runs on 5-15V, accepts std. video signal. Best unit on the market! Complete kit, VD-1 **$7.95**

Led Blinky Kit

A great attention getter which alternately flashes 2 jumbo LEDs. Use for name badges, buttons, warning panel lights, anything! Runs on 3 to 15 volts. Complete kit, BL-1 **$2.95**

Super Sleuth

A super sensitive amplifier which will pick up a pin drop at 15 feet! Great for monitoring baby's room or as general purpose amplifier. Full 2 W rms output, runs on 6 to 15 volts, uses 8-45 ohm speaker.
Complete kit, BN-9 **$5.95**

CPO-1

Runs on 3-12 Vdc 1 watt out, 1 KHZ good for CPO, Alarm, Audio Oscillator. Complete kit **$2.95**

FM Wireless Mike Kit

Transmits up to 300' to any FM broadcast radio, uses any type of mike. Runs on 3 to 9V. Type FM-2 has added sensitive mike preamp stage.

FM-1 kit **$3.95** FM-2 kit **$4.95**

Whisper Light Kit

An interesting kit, small mike picks up sounds and converts them to light. The louder the sound, the brighter the light. Includes mike, controls up to 300 W, runs on 110 VAC.
Complete kit, WL-1 **$6.95**

Tone Decoder

A complete tone decoder on a single PC board. Features: 400-5000 Hz adjustable range via 20 turn pot, voltage regulation, 567 IC. Useful for touch-tone burst detection, FSK, etc. Can also be used as a stable tone encoder. Runs on 5 to 12 volts.
Complete kit, TD-1 **$5.95**

Universal Timer Kit

Provides the basic parts and PC board required to provide a source of precision timing and pulse generation. Uses 555 timer IC and includes a range of parts for most timing needs.

UT-5 Kit **$5.95**

Mad Blaster Kit

Produces LOUD ear shattering and attention getting siren like sound. Can supply up to 15 watts of obnoxious audio. Runs on 6-15 VDC

MB-1 Kit **$4.95**

Siren Kit

Produces upward and downward wail characteristic of a police siren. 5 W peak audio output, runs on 3-15 volts, uses 3-45 ohm speaker.
Complete kit, SM-3 **$2.95**

60 Hz Time Base

Runs on 5-15 VDC. Low current (2 5ma) 1 min/month accuracy TB-7 Kit **$5.50**
TB-7 Assy **$8.95**

CLOCK KITS

Your old favorites are here again. Over 7,000 Sold to Date. Be one of the gang and order yours today!

Try your hand at building the finest looking clock on the market. Its satin finish anodized aluminum case looks great anywhere, while six .4" LED digits provide a highly readable display. This is a complete kit, no extras needed, and it only takes 1-2 hours to assemble. Your choice of case colors: silver, gold, black (specify).

Clock kit, 12/24 hour, DC-5 **$24.95**
Clock with 10 min. ID timer, 12/24 hour, DC-10 **$29.95**
Alarm clock, 12 hour only, DC-8 **$29.95**
12V DC car clock, DC-7 **$29.95**

For wired and tested clocks add $10.00 to kit price.
SPECIFY 12 OR 24 HOUR FORMAT

Car Clock

The UN-KIT, only 5 solder connections

Here's a super looking, rugged and accurate auto clock which is a snap to build and install. Clock movement is completely assembled — you only solder 3 wires and 2 switches, takes about 15 minutes! Display is bright green with automatic brightness control photocell — assures you of a highly readable display, day or night. Comes in a satin finish anodized aluminum case which can be attached 5 different ways using 2 sided tape. Choice of silver, black or gold case (specify).

DC-3 kit, 12 hour format **$22.95**
DC-3 wired and tested **$29.95**

Calendar Alarm Clock

The clock that's got it all: 6- 5" LEDs, 12/24 hour, snooze, 24 hour alarm, 4 year calendar, battery backup, and lots more. The super 7001 chip is used. Size: 5x4x2 inches. Complete kit, less case (not available)
DC-9 **$34.95**

Under Dash Car Clock

12/24 hour clock in a beautiful plastic case features: 6 jumbo RED LEDS, high accuracy (.001%), easy 3 wire hookup, display blanks with ignition, and super instructions. Optional dimmer automatically adjusts display to ambient light level.

DC-11 clock with mtg. bracket **$27.95 kit**
DM-1 dimmer adaptor **$3.50**
Add $10.00 Assy. and Test

Video Terminal

A completely self-contained, stand alone video terminal card. Requires only an ASCII keyboard and TV set to become a complete terminal unit. Features are: single 5V supply, TTL controlled sync and baud rates (to 9600), complete computer and keyboard control of cursor. Parity error control and display. Accepts and generates serial ASCII plus parallel keyboard input. The 6416 is 64 char. by 16 lines with scrolling, upper and lower case (optional) and has RS-232 and 20ma loop interfaces on board. Kit to include sockets and complete documentation.

RE 6416, terminal card kit (add $60.00 for wired unit) **$189.95**
Lower Case option **$13.95**
Power Supply **$14.95**
RF Modulator kit **$7.95**

PARTS PARADE

IC SPECIALS

LINEAR

301	$ .35
324	$1.50
380	$1.50
555	$ .45
556	$1.00
565	$1.00
566	$1.00
567	$1.25
741	10/$2.00
1458	$ .50
3900	$ .50
3914	$2.95
8038	$2.95

CMOS

4011	.50
4013	.50
4046	$1.85
4049	.50
4059	$9.00
4511	$2.00
4518	$1.35
5639	$1.75

TTL

74S00	$ .40
7447	$ .65
7475	$ .50
7490	$ .50
74196	$1.35

SPECIAL

11C90	$15.00
10116	$ 1.25
7208	$17.50
7207A	$ 5.50
7216D	$21.00
7107C	$12.50
5314	$ 2.95
5375AB/G	$ 2.95
7001	$ 6.50

FERRITE BEADS

With info and specs 15/$1.00
6 Hole Balun Beads 6/$1.00

READOUTS

FND 359 .4" C.C. $1.00
FND 507/510 .5"C.A. 1.00
MAN 72/HP7730 .33"C.A. 1.00
HP 7661 .43"C.A. 2.00

TRANSISTORS

2N3904 NPN C+F	15/$1.00
2N3906 PNP C+F	15/$1.00
2N4403 PNP C+F	15/$1.00
2N4410 NPN C+F	15/$1.00
2N4916 FET C+F	4/$1.00
2N5401 PNP C+F	5/$1.00
2N6028 C+F	4/$1.00
2N3771 NPN Silicon	$1.50
2N5179 UHF NPN	3/$2.00
Power Tab NPN 40W	3/$1.00
Power Tab PNP 40W	3/$1.00
MPF 102/2N5484	$.50
NPN 3904 Type T+R	50/$2.50
PNP 3906 Type T+R	50/$2.50
2N3055	$.60
2N2646 UJT	3/$2.00

Sockets

8 Pin	10/$2.00
14 Pin	10/$2.00
16 Pin	10/$2.00
24 Pin	4/$2.00
28 Pin	4/$2.00
40 Pin	3/$2.00

Diodes

5.1 V Zener	20/$1.00
1N914 Type	50/$1.00
1KV 2Amp	8/$1.00
100V 1Amp	15/$1.00

25 AMP 100V Bridge **$1.50 each**

Mini-Bridge 50V 1 AMP 2 for $1.00

Resistor Ass't

Assortment of Popular values - ¼ watt. Cut lead for PC mounting, ½" center, ½" leads, bag of 300 or more **$1.50**

Switches

Mini toggle SPDT **$1.00**
Red Pushbuttons N.O. **3/$1.00**

Earphones

3" leads, 8 ohm, good for small tone speakers, alarm clocks, etc.
5 for $1.00

Mini 8 ohm Speaker

Approx. 2¼" diam. Round type for radios, mike etc.
3 for $2.00

Slug Tuned Coils

Small 3/16" Hex. Slugs turned coil. 3 turns. 10 for $1.00

CAPACITORS

TANTALUM Dipped Epoxy		ALUMINUM Electrolytic		DISK CERAMIC	
1.5 uF 25V 3/$1.00		1000 uF 16V Radial	$.50	01 16V disk	20/$1.00
1.8 uF 25V 3/$1.00		500 uF 20V Axial	$.50	1 16V	15/$1.00
.22 uF 25V 3/$1.00		150 uF 16V Axial	5/$1.00	001 16V	20/$1.00
		10 uF 15V Radial	10/$1.00	100 pF	20/$1.00
				047 16V	20/$1.00

DC-DC Converter

+5 vdc input prod. -9 vdc @ 30ma
+9 vdc produces -15 vdc @ 35ma **$1.25**

25K 20 Turn Trim Pot **$1.00**
1K 20 Turn Trim Pot **$ .50**

Crystal Microphone

Small 1" diameter ¼" thick crystal mike cartridge **$.75**

Coax Connector

Chassis mount BNC type **$1.00**

Paris Bag

Asst. of chokes, disc caps, tant., resistors, transistors, diodes, MICA caps etc. sm. bag (100 pc) **$1.00** lg. bag (300 pc) **$2.50**

Leds

- your choice, please specify
Mini Red, Jumbo Red, High Intensity Red, Illuminator Red **8/$1**
Mini Yellow, Jumbo Yellow, Jumbo Green **6/$1**

Varactors

Motorola MV 2209 30 PF Nominal cap 20-60 PF - Tunable range - .50 each or 3/$1.00

Crystals

3.579545 MHZ	$1.50
10.00000 MHZ	$5.00
5.248800 MHZ	$5.00

AC Adapters

Good for clocks, nicad chargers, all 110 VAC plug one end.

8.5 vdc @ 20 mA	$1.00
16 vac @ 160mA	$2.50
12 vac @ 250mA	$3.00

Solid State Buzzers

small buzzer 450 Hz, 86 dB sound output on 5-12 vdc at 10-30 mA. TTL compatible **$1.50**

AC Outlet

Panel Mount with Leads **4/$1.00**

Ceramic IF Filters

Mini ceramic filters 7 kHz B.W. 455 kHz $1.50 ea.

Trimmer Caps

Sprague - 3-40 pf Stable Polypropylene .50 ea.

Mini RG-174 Coax

10 ft. for $1.00

9 Volt Battery Clips

Nice quality clips 5 for $1.00
¼" Rubber Grommets 10 for $1.00

Connectors

6 pin type gold contacts for mA-1003 car clock module price .75 ea.

Audio Prescaler

Make high resolution audio measurements, great for musical instrument tuning, PL tones, etc. Multiplies audio UP in frequency, selectable x10 or x100, gives .01 HZ resolution with 1 sec. gate time! High sensitivity of 25 mv, 1 meg input z and built-in filtering gives great performance. Runs on 9V battery, all CMOS.

PS-2 kit **$29.95**
PS-2 wired **$39.95**

600 MHz PRESCALER

Extend the range of your counter to 600 MHz. Works with all counters. Less than 150 mv sensitivity. specify - 10 or -100

Wired, tested, PS-1B **$59.95**
Kit, PS-1B **$44.95**

30 Watt 2 mtr PWR AMP

Simple Class C power amp features 8 times power gain. 1 W in for 8 out, 2 W in for 15 out, 4W in for 30 out. Max output of 35 W, incredible value, complete with all parts, less case and T-R relay.

PA-1, 30 W pwr amp kit **$22.95**
TR-1, RF sensed T-R relay kit **6.95**

MRF-238 transistor as used in PA-1 8-10db gain 150 mhz **$11.95**

Power Supply Kit

Complete triple regulated power supply provides variable 6 to 18 volts at 200 ma and +5 at 1 Amp. Excellent load regulation, good filtering and small size. Less transformers, requires 6.3 V @ 1 A and 24 VCT.
Complete kit, PS-3LT **$6.95**

RF actuated relay senses RF (1W) and closes DPDT relay. For RF sensed T-R relay
TR-1 Kit **$6.95**

OP-AMP Special

BI-FET LF 13741 - Direct pin for pin 741 compatible, but 500,000 MEG input z, super low 50 pa input current, low power drain.

50 for only $9.00 **10 for $2.00**

Regulators

78MG	$1.25	7812	$1.00
79MG	$1.25	7815	$1.00
723	$.50	7905	$1.25
309K	$1.15	7912	$1.25
7805	$1.00	7915	$1.25

Shrink Tubing Nuke

Nice precut pcs of shrink size 1" x ¼" shrink to ⅛". Great for splices. **50/$1.00**

Mini TO-92 Heat Sinks

Thermalloy Brand 5 for $1.00
TO-220 Heat Sinks 3 for $1.00

Opto Isolators - 4N28 type **$.50 ea.**
Opto Reflectors - Photo diode + LED **$1.00 ea.**

Molex Pins

Molex already precut in length of 7. Perfect for 14 pin sockets. 20 strips for $1.00

CDS Photocells

Resistance varies with light, 250 ohms to over 3 meg 3 for $1.00

DIAL - YOUR - DEAL
TRADE IN
TRADE YOUR EQUIPMENT ON
NEW or USED
CALL TOLL-FREE
1-800-325-3636
FOR THE BEST DEAL ON:
YAESU
ICOM
HAL
KENWOOD
SWAN
DRAKE
TEN-TEC
INFO-TECH
COLLINS
HAM RADIO CENTER
8340-42 Olive Blvd. • P.O. Box 28271 • St. Louis, MO 63132
MasterCard
VISA

MHz electronics

(602) 242-3037
(602) 242-8916
2111 W. CAMELBACK ROAD
PHOENIX, ARIZONA 85015

Introducing

TVRO CIRCUIT BOARDS

Satellite Receiver Boards—Now in Stock

DUAL CONVERSION BOARD.....**$25.00**
This board provides conversion from the 3.7-4.2 band first to 900 MHz where gain and bandpass filtering are provided and, second, to 70 MHz. The board contains both local oscillators, one fixed and the other variable, and the second mixer. Construction is greatly simplified by the use of Hybrid IC amplifiers for the gain stages.

SIX 47pF CHIP CAPACITORS
For use with dual conversion board.....**$6.00**

70 MHz IF BOARD.....**$25.00**
This circuit provides about 43dB gain with 50 ohm input and output impedance. It is designed to drive the HOWARD/COLEMAN TVRO Demodulator. The on-board bandpass filter can be tuned for bandwidths between 20 and 35 MHz with a passband ripple of less than ½ dB. Hybrid IC's are used for the gain stages.

SEVEN .01 pF CHIP CAPACITORS
For use with the 70 MHz IF board.....**$7.00**

DEMODULATOR BOARD.....**$40.00**
This circuit takes the 70 MHz center frequency satellite TV signals in the 10 to 200 millivolt range, detects them using a phase locked loop, de-emphasizes and filters the result and amplifies the result to produce standard NTSC video. Other outputs include the audio subcarrier, a DC voltage proportional to the strength of the 70 MHz signal, and AFC voltage centered at about 2 volts DC.

SINGLE AUDIO.....**$15.00**
This circuit recovers the audio signals from the 6.8 MHz frequency. The Miller 9051 coils are tuned to pass the 6.8 MHz subcarrier and the Miller 9052 coil tunes for recovery of the audio.

DUAL AUDIO.....**$25.00**
Duplicate of the single audio but also covers the 6.2 range.

DC CONTROL.....**$15.00**

SPECIAL SET OF FIVE BOARDS.....**$100.00**
INCLUDING DUAL AUDIO (2 single audio boards)

1900 to 2500 MHz MICROWAVE DOWNCONVERTER

MICROWAVE RECEIVER This receiver is tunable over a range of 1900 to 2500 MHz approximately, and is intended for amateur use. The local oscillator is voltage controlled, making the I.F. range approximately 54 to 88 MHz for standard TV set channels 2 thru 7.

P.C. BOARD with DATA 1 to 5 **$15.00** 6 to 11 **$13.00** 12 to 26 **$11.00** 27 - up **$9.00**

P.C. Board with all parts for assembly.....**$49.99**
P.C. Board with all parts for assembly plus 2N6603.....**$69.99**
P.C. Board with all chip caps soldered on...**$30.00**
P.C. Board assembled & tested.....**$69.99**
P.C. Board assembled & tested with 2N6603**$79.99**

HMR II DOWNCONVERTER with Power Supply, Antenna (Dish) & all Cables for installation. 180 Day Warranty.
1 to 5 **$150.00** 6 to 11 **$140.00** 12 - up **$125.00**

YAGI DOWNCONVERTER with Power Supply, Antenna (Yagi) & all Cables for installation. 90 Day Warranty.
1 to 5 **$150.00** 6 to 11 **$140.00** 12 - up **$125.00**

YAGI DOWNCONVERTER as above but Kit. (NO CABLES) With Box.
1 to 5 **$125.00** 6 to 11 **$115.00** 12 - up **$100.00**

HMR II DOWNCONVERTER as above but Kit. (NO CABLES) With PVC.
1 to 5 **$125.00** 6 to 11 **$115.00** 12 - up **$100.00**

SPECIAL NEW STOCK OF CARBIDE DRILL BITS—YOUR CHOICE $1.99

1.25mm	13/64	36	47	55	63
1.45mm	19	37	48	56	64
3.2mm	20	38	49	57	65
3.3mm	24	39	50	58	67
1/8	26	40	51	59	68
3/16	29	44	52	60	69
5/32	30	45	53	61	
7/32	31	46	54	62	

Start taking calls in curious places with the revolutionary, new Cordless *Escort*® Phone.

Special Purchase—The *Escort*® Cordless Telephone!

We are pleased to announce the Escort Mark III is now available at special pricing. We bought the manufacturer's entire inventory-- and we are passing the savings on to you!

The Escort Mark III was originally designed to retail for $199.95. Now, we suggest a retail price of $169.95 to $189.95. Or, you can move them out at $149.95. In any event, you'll like the profit margins.

QUANTITY	*DEALER PRICE*	*GROSS PROFIT AT $149.95*
1—2 units	69.75 each	53%
3—5 units	64.50 each	57%
6—11 units	62.50 each	58%
12—23 units	60.75 each	59%

On all orders of 12 or more, we pay the freight! This is your opportunity to stock up for the Christmas buying season. These are ideal gift items, that will really move out!

ESCORT MARK III SPECIFICATIONS

VHF DUPLEXERS

This duplexer was made for RF Harris Mobile Phones and Two Way Radios. These duplexers can be used in any mobile phone or two way radio system, along with having the capabilities to be modified for UHF use. The physical dimensions are 3 3/5" Long, 4 2/5" Wide, and 1 1/10" Deep. The approximate weight is 18 oz./1 lb. 2 oz.. PRICE **$74.99**

- Operates as a regular telephone on touch-tone or rotary dial systems
- Range up to 300 feet
- Ni-Cad rechargeable batteries included in telephone
- Charger built into base transmitter
- Simple plug-in installation!
- High-performance antenna
- Full duplex, answer and dial out
- Full FCC approval

Exactly As Shown

HOW WE CUT THE CORD.
The new Cordless Phone works on a simple, highly sophisticated principle. A small base station plugs into your regular phone jack, and an electrical wall outlet. The base station then transmits any in- or out-going call to the handheld receiver, anywhere up to 300 feet.

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

"FILTERS"

Collins Mechanical Filter #526-9724-010 Model F455Z32F
455KHz at 3.2KHz Wide. $15.00

Atlas Crystal Filters

5.52-2.7/8	5.52MHz/2.7KHz wide 8 pole	
5.595-2.7/8/U	5.595MHz/2.7KHz wide 8 pole upper sideband	
5.595-.500/4/CW	5.595MHz/.500KHz wide 4 pole CW	
5.595-2.7/LSB	5.595MHz/2.7KHz wide 8 pole lower sideband	
5.595-2.7/USB	5.595MHz/2.7KHz wide 8 pole upper sideband	
5.645-2.7/8	5.645MHz/2.7KHz wide 8 pole	Your Choice
9.0SB/CW	9.0MHz/ 8 pole sideband and CW	$12.99

Kokusai Electric Co. Mechanical Filter #MF-455-ZL-21H
455KHz at Center Frequency of 453.5Kc Carrier Frequency of 455Kc 2.36Kc Bandwidth $15.00

Crystal Filters

Nikko	FX-07800C	7.8MHz	10.00
TEW	FEC-103-2	10.6935	10.00
Tyco/CD	001019880	10.7MHz 2 pole 15KHz Bw. Motorola #48D84396K01 Thru #48D84396K05	4.00
Motorola	4884863B01	11.7MHz 2 pole 15KHz Bandwidth	5.00
PTI	5350C	12MHz 2 pole 15KHz Bandwidth	5.00
PTI	5426C	21.4MHz 2 pole 15KHz Bandwidth	5.00
CD	A10300	45MHz 2 pole 15KHz Bandwidth (For Motorola Communications equipment)	5.00

Ceramic Filters

Murata	BFB455B	455KHz	$ 2.40
	CFM455E	455KHz +- 5.5KHz	6.65
	CFM455D	455KHz +- 7KHz	6.65
	CFR455E	455KHz +- 5.5KHz	8.00
	CFU455E	455KHz +- 1.5KHz	2.90
	CFU455G	455KHz +- 1KHz	2.90
	CFW455D	455KHz +- 1KHz	2.90
	CFW455H	455KHz +- 3KHz	4.35
	SFB455D	455KHz	2.40
	SFE10.7	10.7MHz	2.67
	SFG10.7MA	10.7MHz	10.00
Clevite	TO-01A	455KHz	5.00
	TO-02A	455KHz	5.00
Nippon	LF-B4/CFU455I	455KHz +- 1KHz	5.80
	LF-B6/CFU455H	455KHz +- 1KHz	5.80
	LF-C18	455KHz	10.00
Tokin	CF455A/BFU455K	455KHz +- 2KHz	4.80
Matsushira	EFC-L455K	455KHz	7.00

ROTRON MUFFIN FANS Model Mark 4/MU2A1
These fans are new factory boxed 115vac at 14watts 50/60cps. Impedance Protected-F
CFM is 88 at 50cps and 105 at 60cps. $ 7.99

SPECTRA PHYSICS INC. Model 088 HeNe Laser Tubes.
Power output 1.6mw. Beam Dia. .75mm. Beam Dir. 2.7mr. 8Kv starting voltage
68K ohm 1watt ballast 1000vdc +-100vdc 3.7ma. TUBES ARE NEW $59.99

"AMPLIFIERS"

AVANTEK LOW NOISE AMPLIFIERS

Models	UTC2-102M	AP-20-T	AL-45-0-1	AK-1000M
Frequency Range	30 to 200MC	200 to 400MC	450 to 800MC	500 to 1000MC
Noise Figure	1.5dB	6.5dB	7dB	2.5dB
Voltage	+15vdc	+24vdc	-6vdc @ +12vdc	+12vdc @ -12vdc
Gain	29dB	30dB	30dB	25dB
Power Output	1dB Gain +7dBm	1dB Gain +20dBm	1dB Gain -5dBm	1dB Gain +8dBm
Price	$49.99	$49.99	$49.99	$69.99

Mini Circuits Double Balanced Mixers

Model RAY-3
Very High Level (+23dBm LO) 70KHz to 200MHz LO,RF,DC to 200MHz IF
Conversion Loss,dB One Octave From Band Edge 6Typ./7.5Max. Total Range 6.5Typ./8Max. Isolation,dB Lower Band Edge To One Decade Higher (LO-RF/LO-IF) 55Typ./45Min. Mid. Range (LO-RF/LO-IF) 40Typ./30Min. Upper Band Edge To One Octave Lower (LO-RF/LO-IF) 30Typ./25Min.
Price $24.99

Model TSM-3
Standard Level (+7dBm LO) .1MHz to 400MHz LO,RF,DC to 400MHz IF
Conversion Loss,dB One Octave From Band Edge 5.3Typ./7.5Max. Total Range 6.5Typ./8.5Max. Isolation,dB Lower Band Edge To One Decade Higher (LO-RF/LO-IF) 60Typ./50Min. Mid. Range (LO-RF/LO-IF) 50Typ./35Min. Upper Band Edge To One Octave Lower (LO-RF/LO-IF) 35TYP./25Min.
Price $11.99

Hewlett Packard Linear Power Microwave RF Transistor HXTR5401/35831E

Collector Base Brakedown Voltage at Ic=100ua	35volts min.
Collector Emitter Brakedown Voltage at Ic=500ua	30volts min.
Collector Cutoff Current at Vcb=15v	100ua max.
Forward Current Transfer Ratio at Vce=15v,Ic=15ma	15min,40typ,125max
Transducer Power Gain at Vce=18v,Ice=60ma,F=2GHz.	3dBmin,4dBtyp
Maximum Available Gain at Vce=18v,Ic=60ma,F=1GHz/F=2GHz	14dB typ,8dB typ
Price $29.99	

Motorola RF Power Amplifier Modules

Model	MHW612A	MHW613A	MHW710	MHW720
Frequency Range	146 to 147MHz	150 to 174MHz	400 to 512MHz	400 to 470MHz
Voltage	12.5vdc	12.5vdc	12.5vdc	12.5vdc
Output Power	20watts	30watts	13watts	20watts
Minimum Gain	20dB	20dB	19.4dB	21dB
Harmonics	-30dB	-30dB	40dB	40dB
RF Input Power	400mw	500mw	250mw	250mw
Price	$57.50	$59.80	$57.50	$69.00

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

"TRANSISTORS"

WATKINS JOHNSON WJ-M62 3.7 to 4.2GHz Communication Band Double Balanced Mixer $100.00

SSB Conversion Loss	4.9dB Typ. 6dB Max.	fR 3.7 to 4.2GHz	
	5.5dB Typ. 6.5dB Max.	fI DC to 1125MHz fL fR	
		fI 880MHz fL fR	
SSB Noise Fiqure		fR 3.7 to 4.2GHz	
	4.9dB Typ. 6dB Max.	fI 30 to 1125MHz fL fR	
	5.5dB Typ. 6.5dB Max.	fI 880MHz fL fR	
Isolation			
fL at R	30dB Min. 40dB Typ.	fL 2.8 to 5.35GHz	
fL at I	25dB Min. 30dB Typ.	fL 4.5 to 5.35GHz	
	20dB Min. 30dB Typ.	fL 3.6 to 4.5GHz	
	15dB Min. 25dB Typ.	fL 2.8 to 3.6GHz	
Conversion Compression	1dB Max.	fR Level +2dBm	
Flatness	.2dB Peak to Peak Over any 40MHz Segment of fR=3.7 to 4.2GHz		
Third Order Input Intercept	+11dBm	fR1=4GHz fR2=4.01GHz Both at -5dBm fL=4.5GHz	
Group Time Delay	.5ns Typ. .75ns Max.	fR3.7 to 4.2GHz fL 3480MHz	@ +13dBm
VSWR	L-Port 1.25:1 Typ.	2.0:1	fL 2.8 to 5.35GHz
	R-Port 1.25:1 Typ.	2.0:1	fR 3.7 to 4.2GHz fL fR
	1.4 :1 Typ.	2.0:1	fR 3.7 to 4.2GHz fL fR
	I-Port 1.5 :1 Typ.	2.0:1	fI=100MHz
	1.3 :1 Typ.	2.0:1	fI=500MHz
	1.8 :1 Typ.	2.5:1	fI=1125MHz

SGS/ATES RF Transistors			Motorola RF Transistor	
Type.	BFQ85	BFW92	MRF901	2N6603
Collector Base V	20v	25v	25v	25v
Collector Emitter V	15v	15v	15v	15v
Emitter Base V	3v	2.5v	3v	3v
Collector Current	40ma	25ma	30ma	30ma
Power Dissipation	200mw	190mw	375mw	400mw
HFE	40min. 200max.	20min. 150max.	30min. 200max.	30min. 200max.
FT	4GHZ min. 5GHz max.	1.6GHz Typ.	4.5GHz typ.	2GHz min.
Noise Fiqure	1GHz 3dB Max.	500MHz 4dB Typ.	1GHz 2dB Typ.	2GHz 2.9dB Typ.
Price	$1.50	$1.50	$2.00	$10.00

National Semiconductor Variable Voltage Regulator Sale !!!!!!!!!

LM317K	LM350K	LM723G/L	LM7805/06/08/12/15/18/24
1.2 to 37vdc	1.2 to 33vdc	2 to 37vdc	5, 6, 8,12,15,18,24vdc
1.5Amps	3Amps	150ma.	1Amp
TO-3	TO-3	TO-100/TO-116	TO-220/TO-3
$4.50	$5.75	$1.00 $1.25	$1.17 $2.00

P & B Solid State Relays Type ECT1DB72
5VDC Turn On 120VAC Contact 7Amps
20Amps on 10"x10"x.062" Alum.Heatsink with
Silicon Grease $5.00

*May Be Other Brand Equivalent

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

"MIXERS"

WATKINS JOHNSON WJ-M6 Double Balanced Mixer

LO and RF 0.2 to 300MHz	IF DC to 300MHz	$21.00
Conversion Loss (SSB)	6.5dB Max. 1 to 50MHz 8.5dB Max. .2 to 300MHz	WITH DATA SHEET
Noise Figure (SSB)	same as above 8.5dB Max. 50 to 300MHz	
Conversion Compression	.3dB Typ.	

NEC (NIPPON ELECTRIC CO. LTD. NE57835/2SC2150 Microwave Transistor

NF Min F=2GHz	dB 2.4 Typ.	MAG F=2GHz	dB 12 Typ.	$5.30
F=3GHz	dB 3.4 Typ.	F=3GHz	dB 9 Typ.	
F=4GHz	dB 4.3 Typ.	F=4GHz	dB 6.5 Typ.	

Ft Gain Bandwidth Product at Vce=8v, Ic=10ma. GHz 4 Min. 6 Typ.
Vcbo 25v Vceo 11v Vebo 3v Ic 50ma. Pt. 250mw

UNELCO RF Power and Linear Amplifier Capacitors

These are the famous capacitors used by all the RF Power and Linear Amplifier manufacutures and described in the Motorola RF Data Book.

10pf	22pf	30pf	40pf	100pf	250pf	1 to 10pcs. .60¢ each
13pf	25pf	32pf	43pf	120pf	820pf	11 to 50pcs. .50¢ each
14pf	27pf	33pf	62pf	180pf		51 to 100pcs. .40¢ each
20pf	27.5pf	34pf	80pf	200pf		

NIPPON ELECTRIC COMPANY TUNNEL DIODES $7.50

		MODEL 1S2199	1S2200
Peak Pt. Current ma.	Ip	9min. 10Typ. 11max.	9min. 10Typ. 11max.
Valley Pt. Current ma.	Iv	1.2Typ. 1.5max.	1.2Typ. 1.5max.
Peak Pt. Voltage mv.	Vp	95Typ. 120max.	75Typ. 90max.
Projected Peak Pt. Voltage mv.	Vpp Vf=Ip	480min. 550Typ. 630max.	440min. 520Typ. 600max.
Series Res. Ohms	rS	2.5Typ. 4max.	2Typ. 3max.
Terminal Cap. pf.	Ct	1.7Typ. 2max.	5Typ. 8max.
Valley Pt. Voltage mv.	VV	370Typ.	350Typ.

FAIRCHILD / DUMONT Oscilloscope Probes Model 4290B

Input Impedance 10 meg., Input Capacity 6.5 to 12pf., Division Ration (Volts/Div Factor) 10:1, Cable Length 4Ft. , Frequency Range Over 100MHz.
These Probes will work on all Tektronix, Hewlett Packard, and other Oscilloscopes.

PRICE $45.00

MOTOROLA RF DATA BOOK

List all Motorola RF Transistors / RF Power Amplifiers, Varactor Diodes and much much more.

PRICE $7.50

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

"SOCKETS AND CHIMNEYS"

EIMAC TUBE SOCKETS AND CHIMNEYS

SK110	Socket	$ POR	SK626	Chimney	$ 7.70
SK406	Chimney	35.00	SK630	Socket	45.00
SK416	Chimney	22.00	SK636B	Chimney	26.40
SK500	Socket	330.00	SK640	Socket	27.50
SK506	Chimney	47.00	SK646	Chimney	55.00
SK600	Socket	39.50	SK711A	Socket	192.50
SK602	Socket	56.00	SK740	Socket	66.00
SK606	Chimney	8.80	SK770	Socket	66.00
SK607	Socket	43.00	SK800A	Socket	150.00
SK610	Socket	44.00	SK806	Chimney	30.80
SK620	Socket	45.00	SK900	Socket	253.00
SK620A	Socket	50.50	SK906	Chimney	44.00

JOHNSON TUBE SOCKETS

124-115-2/SK620A	Socket	$ 30.00	124-113	Bypass Cap.	$ 10.00
124-116/SK630A	Socket	40.00	122-0275-001	Socket (For 4-250A,4-400A,3-400Z, 3-500Z)	10.00 2/$15.00

CHIP CAPACITORS

.8pf	10pf	100pf*	430pf
1pf	12pf	110pf	470pf
1.1pf	15pf	120pf	510pf
1.4pf	18pf	130pf	560pf
1.5pf	20pf	150pf	620pf
1.8pf	22pf	160pf	680pf
2.2pf	24pf	180pf	820pf
2.7pf	27pf	200pf	1000pf/.001uf*
3.3pf	33pf	220pf*	1800pf/.0018uf
3.6pf	39pf	240pf	2700pf/.0027uf
3.9pf	47pf	270pf	10,000pf/.01uf
4.7pf	51pf	300pf	12,000pf/.012uf
5.6pf	56pf	330pf	15,000pf/.015uf
6.8pf	68pf	360pf	18,000pf/.018uf
8.2pf	82pf	390pf	

PRICES: 1 to 10 - .99¢ 101 to 1000 .60¢ * IS A SPECIAL PRICE: 10 for $7.50
11 to 50 - .90¢ 1001 & UP .35¢ 100 for $65.00
51 to 100 - .80¢ 1000 for $350.00

WATKINS JOHNSON WJ-V907: Voltage Controlled Microwave Oscillator $110.00

Frequency range 3.6 to 4.2GHz, Power ouput, Min. 10dBm typical, 8dBm Guaranteed. Spurious output suppression Harmonic (nf_0), min. 20dB typical, In-Band Non-Harmonic, min. 60dB typical, Residual FM, pk to pk, Max. 5KHz, pushing factor, Max. 8KHz/V, Pulling figure (1.5:1 VSWR), Max. 60MHz, Tuning voltage range +1 to +15volts, Tuning current, Max. -0.1mA, modulation sensitivity range, Max. 120 to 30MHz/V, Input capacitance, Max. 100pf, Oscillator Bias +15 +-0.05 volts @ 55mA, Max.

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

"TUBES"

TUBES	PRICE
2E26	$ 4.69
2K28	100.00
3B28	5.00
3-500Z	102.00
3-1000Z/8164	300.00
3CX1000A/8283	200.00
3X2500A3	200.00
4-65A/8165	45.00
4-125A/4D21	58.00
4-250A/5D22	68.00
4-400A/8438	71.00
4-400C/6775	80.00
4-1000A/8166	300.00
4CS250R	69.00
4X150A/7034	30.00
4X150D/7035	40.00
4X150G	50.00
4X250B	30.00
4CX250B/7203	45.00
4CX250F/7204	45.00
4CX250FG/8621	55.00
4CX250K/8245	100.00
4CX250R/7580W	69.00
4CX300A	99.00
4CX350A/8321	100.00
4CX350FJ/8904	100.00
4X500A	100.00
4CX600J	300.00
4CX1000A/8168	300.00
4CX1500B/8660	300.00
4CX3000A/8169	300.00
4CX5000A/8170	400.00
4CX10000D/8171	500.00
4CX15000A/8281	700.00
4E27/A/5-123A/B	40.00
4PR60A	100.00
4PR60B/8252	175.00
KT88	15.00
DX362	35.00
DX415	35.00
572B/T160L	44.00
811	10.00
811A	13.00
812A	15.00
813	38.00
4624	100.00
4665	350.00
5551A	100.00
5563A	77.00
5675	15.00

TUBES	PRICE
5721	$200.00
5768	85.00
5836	100.00
5837	100.00
5861/EC55	110.00
5876A	15.00
5881/6L6	5.00
5894/A	45.00
5894B	55.00
6080	10.00
6083/AX9909	89.00
6098/6AK6	14.00
6115/A	100.00
6146	6.00
6146A	6.50
6146B/8298A	7.50
6146W	14.00
6159	11.00
6161	70.00
6291	125.00
6293	20.00
6360	4.00
6524	53.00
6550	7.00
6562/6794A	25.00
6693	110.00
6816	58.00
6832	22.00
6883/8032A/8552	7.00
6884	46.00
6897	110.00
6900	35.00
6907	55.00
6939	15.00
7094	75.00
7117	17.00
7211	60.00
7289/3CX100A5	34.00
7360	11.00
7377	67.00
7486	75.00
7650	250.00
7843	58.00
7868	4.00
7984	12.00
8072	55.00
8121	50.00
8122	85.00
8236	30.00
8295/PL172	300.00

TUBES	PRICE
8462	$100.00
8505A	73.50
8533W	92.00
8560A	55.00
8560AS	57.00
8608	34.00
8624	67.20
8637	38.00
8647	123.00
8737/5894B	55.10
8807	1000.00
8873	260.00
8874	260.00
8875	260.00
8877	533.00
8908	12.00
8916	1500.00
8930/X651Z	45.00
8950	10.00
6BK4C	5.00
6DQ5	4.00
6FW5	5.00
6GE5	5.00
6GJ5	5.00
6HS5	5.00
6JB5/6HE5	5.00
6JB6A	5.00
6JM6	5.00
6JN6	5.00
6JS6B	5.00
6JT6A	5.00
6KD6	5.00
6K66/EL505	5.50
6KM6	5.00
6KN6	5.00
6LF6	6.00
6LQ6	6.00
6LU8	5.00
6LX6	5.00
6ME6	5.00
12JB6A	6.00

"WE ARE ALSO LOOKING FOR TUBES NEW/USED ECT."

WE BUY SELL OR TRADE

NOTICE ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE !!

Toll Free Number
800-528-0180
(For orders only)

MHz electronics

TEKTRONIX OSCILLOSCOPES	PRICE
MODEL 453 Portable 50 MHz Dual Trace.	$1200.00
MODEL 453A Portable 60 MHz Dual Trace.	$1400.00
MODEL 454 Portable 150 MHz Dual Trace.	$1800.00
MODEL 454A Portable 150 MHz Dual Trace.	$2000.00
MODEL 455 Portable 50 MHz Dual Trace.	$1800.00
MODEL 475 Portable 200 MHz Dual Trace.	$2640.00
MODEL 475A Portable 250 MHz Dual Trace.	$2940.00
MODEL 7514 Storage Oscilloscope with a 7A15A and a 7A15AN-11 Amplifier and a 7B50 Time Base.	$3500.00
MODEL 577D1 Storage Curve Tracer with a 177 adapter.	$3233.00
MODEL 577D2 Curve Tracer with a 177 adapter.	$2796.00
Tektronix Lab Cart Model 3	$ 316.00
MODEL 547 50 MHz Bench Scope.	
With a 1A1 Dual Trace.	$ 722.50
With a 1A2 Dual Trace.	$ 637.50
With a 1A4 Quad Trace.	$ 872.50
With a 1A5 Differential.	$ 722.50
With a 1A6 Differential.	$ 612.50
or with 1 of each above.	$1667.50
MODEL 545 30 MHz Bench Scope with a CA Dual Trace.	$ 412.50
MODEL 545A 30 MHz Bench Scope with a CA Dual Trace.	$ 437.50
MODEL 544 50 MHz Bench Scope with a CA Dual Trace.	$ 650.50
MODEL 543A 33 MHz Bench Scope with a CA Dual Trace.	$ 475.50
HEWLETT PACKARD OSCILLOSCOPES	**PRICE**
MODEL 180A Main Frame.	$ 675.00
MODEL 180E Main Frame.	$ 750.00
MODEL 181A Main Frame.	$1000.00
MODEL 182A Main Frame.	$ 900.00
MODEL 183A Main Frame.	$1000.00
MODEL 180 SERIES PLUG-INS	
1801A Dual Trace 50 MHz.	$ 495.00
1803A Differential.	$ 775.00
1804A Quad Trace 50 MHz	$ 795.00
1807A Dual Trace 50 MHz	$ 375.00
1815A TDR/Sampler with a 1816A DC to 4 GHz.	$1500.00
1821A Time Base & Delay Generator.	$ 495.00
1822A Time Base & Delay Generator.	$ 525.00
1831A Direct Access 600 MHz.*	$ 200.00
1840A Time Base & Delay Generator.*	$ 450.00
1841A Time Base & Delay Generator.* *For 183A Only. !!!!!!!!	$ 675.00
TELEQUIPMENT MODEL D83 Oscilloscope Dual Trace Portable 50 MHz. With a V4 and S2A Plug-In	$1200.00
DUMONT MODEL 1062 Oscilloscope Dual Trace 65 MHz portable.	$ 750.00
TEKTRONIX	
MODEL RM565 Dual Beam Oscilloscope 10 MHz with a 3A6 Dual Trace and a 3A72 Dual Trace.	$1107.50
MODEL 549 Storage Oscilloscope Bench 50 MHz with a CA Dual Trace	$1000.00
MODEL 647A Oscilloscope Bench 100 MHz with a 10A2 Dual Trace and a 11B2A Time Base.	$1200.00

ORDERING INSTRUCTIONS

DEFECTIVE MATERIAL: All claims for defective material must be made within sixty (60) days after receipt of parcel. All claims must include the defective material (for testing purposes), our invoice number, and the date of purchase. All returns must be packed properly or it will void all warranties.

DELIVERY: Orders are normally shipped within 48 hours after receipt of customer's order. If a part has to be backordered the customer is notified. Our normal shipping method is via First Class Mail or UPS depending on size and weight of the package. On test equipment it is by Air only, FOB shipping point.

FOREIGN ORDERS: All foreign orders must be prepaid with cashier's check or money order made out in U.S. Funds. We are sorry but C.O.D. is not available to foreign countries and Letters of Credit are not an acceptable form of payment either. Further information is available on request.

HOURS: Monday thru Saturday: 8:30 a.m. to 5:00 p.m.

INSURANCE: Please include 25¢ for each additional $100.00 over $100.00, United Parcel only.

ORDER FORMS: New order forms are included with each order for your convenience. Additional forms are available on request.

POSTAGE: Minimum shipping and handling in the US, Canada, and Mexico is $2.50 all other countries is $5.00. On foreign orders include 20% shipping and handling.

PREPAID ORDERS: Order must be accompanied by a check.

PRICES: Prices are subject to change without notice.

RESTOCK CHARGE: If parts are returned to MHZ Electronics due to customer error, customer will be held responsible for all extra fees, will be charged a 15% restocking fee, with the remainder in credit only. All returns must have approval.

SALES TAX: Arizona must add 5% sales tax, unless a signed Arizona resale tax card is currently on file with MHZ Electronics. All orders placed by persons outside of Arizona, but delivered to persons in Arizona are subject to the 5% sales tax.

SHORTAGE OR DAMAGE: All claims for shortages or damages must be made within 5 days after receipt of parcel. Claims must include our invoice number and the date of purchase. Customers which do not notify us within this time period will be held responsible for the entire order as we will consider the order complete.

OUR 800 NUMBER IS STRICTLY FOR ORDERS ONLY
NO INFORMATION WILL BE GIVEN. 1-800-528-0180.

FAIRCHILD VHF AND UHF PRESCALER CHIPS

		PRICE
95H90DC	350MC Prescaler divide by 10/11	$ 8.50
95H91DC	350MC Prescaler divide by 5/6	8.50
11C90DC	650MC Prescaler divide by 10/11	15.50
11C91DC	650MC Prescaler divide by 5/6	15.50
11C06DC	UHF Prescaler 750MC D Type Flip Flop	12.30
11C05DC	1GHz Counter Divide by 4 (Regular price $75.00)	50.00
11C01FC	High Speed Dual 5/4 Input NO/NOR Gate	15.40
82S90	Presettable High Speed Decade/Binary Counter used with the 11C90/91 or the 95H90/91 Prescaler can divide by 100. (Signetics)	5.00
11C24DC	This chip is the same as a Motorola MC4024/4324 Dual TTL Voltage Control Multivibrator.	3.37
11C44DC	This chip is the same as a Motorola MC4044/4344 Phase Frequency Detector.	3.37

GENERAL ELECTRIC CO. GUNN DIODE MODEL Y-2167

Freq. Gap (GHZ) 12 to 18, Output (Min.) 100mW, Duty (%) CW, Typ. Bias (Vdc) 8.0, Type. Oper. (MAdc) 550, Max. Thres. (mAdc) 1000, Max. Bias (Vdc) 10.0. **$39.99**

VARIAN GALLIUM ARSENIDE GUNN DIODES MODEL VSX-9201S5

Freq. Coverage 8 to 12.4GHz, Output (Min.) 100mW, Bias Voltage (Max.) 14vdc, Bias current (mAdc) Operating 550 Typ. 750 Max., Threshold 850 Tup. 1000 Max. **$39.99**

VARI-L Co. Inc. MODEL SS-43 AM MODULATOR

Freq. Range 60 10 150MC, Insertion Loss 13dB Nominal, Signal Port Imp. 50ohms Nominal, Signal Port RF Power + 10dBm Max., Modulation Port BW DC to 1KHZ, Modulation Port Bias 1ma. Nominal. **$24.99**

AVANTEK CASCADABLE MODULAR AMPLIFIERS

	Model UTO-504	UTO-511
Frequency Range	5 to 500 MHz	5 to 500 MHz
Gain	6dB	15dB
Noise Figure	11dB	2.3dB to 3dB
Power Output	+ 17dB	– 2dB to – 3dB
Gain Flatness	1dB	1dB
Input Power Vdc	+ 24	+ 15
mA	100	10
PRICE	$70.00	$75.00

HEWLETT PACKARD MIXERS MODELS

	10514A	10514B
Frequency Range	2MHz to 500MC	2MHz to 500MC
Input/Output Frequency L & R	200KHz to 500MC	200KHz to 500MC
X	DC to 500MC	DC to 500MC
Mixer Conversion Loss (A)	7dB	7dB
(B)	9dB	9dB
Noise Performance (SSB) (A)	7dB	7dB
(B)	9dB	9dB
PRICE	$49.99	$39.99

FREQUENCY SOURCES, INC MODEL MS-74X MICROWAVE SIGNAL SOURCE

MS-74X: Mechanically Tunable Frequency Range (MHz) 10630 to 11230 (10.63 to 11.23GHz) Minimum Output Power (mW) 10, Overall Multiplier Ratio 108, Internal Crystal Oscillator Frequency Range (MHz) 98.4 to 104.0, Maximum Input Current (mA) 400.

The signal source are designed for applications where high stability and low noise are of prime concern. these sources utilize fundamental transistor oscillators with high Q coaxial cavities, followed by broadband stable step recovery diode multipliers. This design allows single screw mechanical adjustment of frequency over standard communications bands. Broadband sampling circuits are used to phase lock the oscillator to a high stability reference which may be either an internal self-contained crystal oscillator, external primary standard or VHF synthesizer. This unique technique allows for optimization of both FM noise and long term stability. List Price is $1158.00 (THESE ARE NEW) **Our Price—$289.**

HEWLETT PACKARD 1N5712 MICROWAVE DIODE

This diode will replace the MBD101, 1N5711, 5082-2800, 5082-2835 ect. This will work like a champ in all those Down Converter projects. **$1.50 or 10/$10.00**

MOTOROLA MHW1172R LOW DISTORTION WIDEBAND AMPLIFIER MODULE.

Frequency Range: 40 to 300 MHz., Power Gain at 50MHz 16.6min. to 17.4max., Gain Flatness ±0.1 Typ. ±0.2 Max. dB., DC Supply Voltage – 28vdc, RF Voltage Input + 70dBmV **PRICE $29.99**

GENERAL ELECTRIC AA NICADS

Model #41B905HD11-G1
Pack of 6 for $5.00 or 60 Cells, 10 Packs for $45.00
These may be broken down to individual cells.

ORDERING INSTRUCTIONS

TERMS: DOMESTIC: Prepaid, C.O.D. or Credit Card
FOREIGN: Prepaid only, U.S. Funds—money order or cashier's check only.

C.O.D.: Acceptable by telephone or mail. Payment from customer will be by cash, money order or cashier's check. We are sorry but we cannot accept personal checks for C.O.D.'s.

CONFIRMING ORDERS: We would prefer that confirming orders not be sent after a telephone order has been placed. If company policy necessitates a confirming order, please mark "CONFIRMING" boldly on the order. If problems or duplicate shipments occur due to an order which is not properly marked, customers will be held responsible for any charges incurred, plus a 15% restock charge on returned parts.

CREDIT CARDS: **WE ACCEPT MASTERCARD VISA AND AMERICAN EXPRESS.**

DATA SHEETS: When we have data sheets in stock on devices we do supply them with the order.

master charge THE INTERBANK CARD

VISA

AMERICAN EXPRESS Cards Welcome

MHz electronics

(602) 242-3037
(602) 242-8916
2111 W. CAMELBACK ROAD
PHOENIX, ARIZONA 85015

Toll Free Number
800-528-0180
(For orders only)

See List of Advertisers on page 114

FULL LINE ALL PARTS & COMPUTER PRODUCTS

Quest ELECTRONICS

P.O. Box 4430M
Santa Clara, CA 95054
Will calls: 2322 Walsh Ave.
(408) 988-1640

60

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

Phone orders only (800) 538-8196

7400TTL		LM317T	1.65	CD4017	1.05	8T26	1.69	**WAVE-FIFO**		DE08	1.35
74S00	19	LM317K	3.75	CD4018	84	8T28	1.95	AY-5-1013	3.65	DA10P	2.10
74S03	19	LM318	1.49	CD4019	45	8T97	69	AY-5-1014	6.00	DA10S	3.00
74S04	23	LM320H-5	1.35	CD4020	85	8T98	99	3341	6.95	Complete Set	9.50
74S05	19	LM320K-12	1.35	CD4021	85	**MOS MEMORY RAM**		**PROM**		Stopwatch Kit	25.95
74S10	19	LM320K-15	1.35	CD4022	1.10	2101-1	1.95	1702A	4.00	Auto Clock Kit	17.95
74S40	55	LM320T-5	.85	CD4023	28	2102-1	1.95	2704	17.50	Digital Clock Kit	19.75
74S51	19	LM320T-12	.85	CD4025	28	2102L-4	1.25	2708	7.00	**RESISTORS ¼ watt 5%**	**1001 IC MASTER CLOSEOUT $99.95**
74S74	39	LM320T-15	.85	CD4026	1.65	2102HL-2L	1.75	2716	9.00	10 per type	.03
74S74A	49	LM323K	6.95	CD4027	49	2114L-4	4.95	2716 5 Volt	5.50	100 per type	.015
74S86	69	LM324	.69	CD4028	69	2114L-45	4.95	2716 5 Volt	39.69	1000 per type	.012
74S74	69	LM324N	.69	CD4029	89	2114L-200ns	2.50	2732	16.50	5000 per type	.0095
74S86	69	LM339	.69	CD4030	69	2114L-300ns	2.50	2758	7.49	350 piece pack,	
74S95	99	LM340K-5	1.35	CD4033	1.49	2114L-450ns	2.50	2758	7.49	5 per type	8.95
74S112	49	LM340K-8	1.35	CD4035	69	2114L-300ns	2.50	2758	7.49	½ watt 5% per type	.03
74S113	49	LM340K-12	1.35	CD4040	1.10	2114L-450ns	2.50	2758	7.49		
74S138	1.70	LM340K-15	1.35	CD4042	79	4116-200ns	2.50	2758	7.49	**DIP SWITCHES**	
74S139	99	LM340K-24	1.35	CD4043	89	8-4116-200ns	15.40	MB7123	2.95	4-position	.65
74S140	69	LM340T-5	.75	CD4044	89	MM5280	2.00	MB7123	3.00	5-position	.90
74S151	1.00	LM340T-8	.75	CD4046	95	MM5321	9.95	MB2512B	3.75	6-position	.90
74S153	99	LM340T-12	.75	CD4049	45	MM5330	5.94	MB2513B	4.75	7-position	.95
74S133	55	LM340T-15	.75	CD4050	55	MM5369	8.95	MB2512B	4.75	8-position	.95
74S138	49	LM340T-18	.75	CD4051	99	PS101	8.95	MB2513B	5.75	9-position	.95
74S40A	40	LM340T-24	.75	CD4066	1.42	4200B	11.50	MB2513B	8.75	10-position	.95
74S160	1.20	LM350	3.50	CD4068	71	4103	2.00	MB5313T	8.75	**KEYBOARDS**	
74S161	1.20	LM377	2.25	CD4069	39	416	10.00	D88577	2.95	56 key ASCII keyboard kit	$74.95
74S174	1.25	LM380N	1.00	CD4069	35	TMM2016	16.95	9223	2.99	Fully assembled	84.50
74S175	99	LM381N	1.60	CD4070	39	HM6116	16.50	**CONNECTORS**		Enclosure Plastic	19.95
74S181	2.75	LM382	1.50	CD4071	39			30 pin edge	2.50	Metal Enclosure	69.95
74S188	69	LM709H	.69	CD4072	39	**CLOCKS**		44 pin edge	4.00		
74S189	1.95	LM723CN	.75	CD4073	39	MB8111	4.95	50 pin edge	4.00	**LEDS**	
74S194	89	LM739N	.69	CD4075	39	MM5312	3.95	100 pin edge	3.95	Red T013	.10
74S195	69	LM741CN	.35	CD4076	65	MM5314	3.95	100 pin edge w/e	4.05	Green, Yellow T013	.20
74S240	1.15	LM741N	.35	CD4077	39	MM5316	3.95			Jumbo Red	.33
74S241	.79	LM747HN	.75	CD4078	39	MM5837	4.95	**IC SOCKETS**		Green, Orange, Yellow Jumbo	.75
74S244	1.15	LM748CN	.35	CD4081	39	MM5840	14.40	Solder Tail Low Profile		Cliplite LED Mounting Clips	4.00
74S251	79	LM1458	.75	CD4082	39	MM5865	3.95	(spec. red, amber, green, yellow, clear)			
74S253	1.20	LM1830N	1.75	CD4116	.47	CT7001	8.95	PIN 14P 16P 18P 24P 28P 40P			
74S258	65	LM1304	1.10	CD4490	6.50	CT7011	8.95	8 11 12 20			
74S260	65	LM1305	1.27	CD4507	.99	MM5016AA/N	4.95	14 14 24 28			
74S280	65	LM1307	1.10	CD4555	1.05	MM5375AA/N	4.50	16 16 28 40			
74S373	1.49	LM1458	.75	CD4556	.99	MM5375AG/N	4.50	18 18 30 48			
74S374	1.49	LM1488	1.05	CD4584	1.10	7202	16.50	20 20 40 49			
74LS00 TTL		LM1812	8.25	CD4515	2.75	7205	10.95				
74LS00	25	LM1889	1.60	CD4518	1.10	7208	10.95	**WIRE WRAP LEVEL 3**		**SPECIAL PRODUCTS**	
74LS02	25	LM2111	1.75	CD4518	1.10	7216	10.95	Pin Pin		2.5 MHz Freq. Counter Kit	37.95
74LS04	25	LM2900	1.25	CD4520	1.10			14 55 .63		30 MHz Freq. Counter Kit	47.75
74LS08	25	LM3900N	.69	CD4527	.51	**MICROPROCESSORS**		16 57 .68	1.00		
74LS10	25	LM3909	.69	CD4528	.51	6502	6.95	18 57 .68	1.00		
74LS11	25	LM3911N	1.25	CD4543	.99	6503	6.95	24 57 .68	1.00	**AC TRANSFORMERS**	
74LS20	25	LM3914N	3.50	CD4553	6.99	6504	6.95	7 level 16 pin wire	.20	**FRAME**	**WALL PLUG**
74LS21	25	LM3915N	3.50	CD4555	.55	6505	6.95			6V 500 ma	94.00 12V 2 amp 87.95
74LS27	25	LM3916N	3.50	CD4556	.55	6507	6.95			6.3V CT 600 ma	4.60 12V 250 ma 2.95
74LS30	25	MC1458N	.55	CD4585	2.45	6522	6.95			12V 250 ma	1.65 12V CT 250 ma 3.75
74LS32	25	MC1488	1.05	CD4585	2.45	6532	6.95			12.6V CT 600 ma	4.95 12V 500 ma 4.60
74LS37	25	ME5558	.69	CD4585	3.00	6800	5.75	**CRYSTALS**		12.6V CT 2 amps	5.95 12V 1 amp 5.95
74LS38	25	ME5559	.69	CD4585	.55	6802	11.95	1 MHz	4.50	12.6V CT 4 amp	8.60 12V 2 amp 7.95
74LS42	25	ME5560	1.50	CD4585	.55	6803	4.95	2 MHz	3.95	24V CT 5 amp	10.00 6, 9, 12 VDC
74LS47	25	ME5561	1.50	CD4585	.55	6809	9.95	3 MHz	3.95	24V CT 1000 ma	3.95 300 ma 8.95
74LS48	25	ME5562	1.50	CD4585	.55	6809E	11.95	4 MHz	3.95	24V CT 600 ma	4.50 9 VDC 500 ma 3.75
74LS51	25	ME5563	4.75	74C14	.79	6820	3.50	5 MHz	3.95		
74LS54	25	7BL01	.69	74C20	.39	6821	3.50	10 MHz	3.95	**Constant Voltage Transformers**	12V, 11 amp
74LS55	25	7BL02	.69	74C30	.39	6828	6.00	20 MHz	3.95	5V, 23 amp, 24V, 11 amp	15.95
74LS73	69	7BM05	.69	74C42	1.10	6844	6.00	32 MHz	4.50		
74LS74	69	7BM06	.69	74C48	1.50	6845	6.00	32768 Hz	4.00		
74LS75	69	7T1466	.69	74C73	.79	6847	6.00	1.8432 MHz	4.00		
74LS83	69	7S491CN	.69	74C76	.69	6850	3.50	2.0000 MHz	4.00		
74LS107A	39	7S492CN	.69	74C86	.79	6852	3.50	3.5795 MHz	3.95		
74LS112A	45	7S493CN	.69	74C89	1.25	6854	3.50	3.9100 MHz	3.95		
74LS113A	45	7S494CN	.69	74C90	1.25	6860	5.00	4.0000 MHz	3.95		
74LS123	65			74C154	3.25	6875	6.00	4.4768 MHz	3.95		
74LS132	65	**A to D CONVERTER**		74C157	1.10	6880	3.50	4.9152 MHz	3.95		
74LS133	49	8038	4.50	74C175	1.19	280A DART	18.75	5.0688 MHz	3.95		
74LS136	49	8052BCN	12.00	74C192	.99	280A DMA	27.50	5.185 MHz	3.95		
74LS138	79	8701CN	12.00	74C193	.99	280A DMA	27.50	5.1840 MHz	3.95		
74LS139	75	8750CJ	13.95	74C899	6.95	280 S10-0	23.05	5.5536 MHz	3.95		
74LS152	79	8741CN	12.00	74C906	1.75	280A S10-0	23.05	6.000 MHz	3.95		
74LS153	65	8400CJ/F	7.49	74C914	1.95	280 S10-1	15.60	14.31810 MHz	3.95		
74LS154	1.10	8741103	9.95	74C922	3.50	280A S10-1	15.60	18.432 MHz	3.95		
74LS155	1.03	ICL7103	14.95	74C923	3.50	280 S10-2	23.05	22.1184 MHz	3.95		
74LS221	1.10			74C925	6.75	280A S10-2	28.05	**KEYBOARD ENCODERS**			
74LS240	1.15	**CMOS**		74C926	6.75	280B CTC	18.75	AY-5-2376	17.95		
74LS257B	69	CD4000	.25	74C927	6.95	2655 PIO	17.95	AY-5-3600PPS	17.95		
		CD4001	.25			2716	9.00	74C922	5.49		
LINEAR		CD4002	.25	**INTERFACE**		8214	3.75	MM5740	5.49		
CA3045	99	CD4006	.99	8095	.65	8216	1.69	MM5741	5.49		
CA3046	99	CD4007	.25	8096	.65	8224	1.69	MM5740	5.49		
CA3059	1.69	CD4008	.65	8097	.65	8226	1.69	MM5740	5.49		
CA3081	1.69	CD4009	.45	8098	.65	8228	4.95	MM5740	5.49		
CA3082	1.69	CD4010	.45	8T09	1.75	8253	6.95	MM5740	5.49		
CA3089	3.49	CD4011	.25	8T10	1.75	8255	6.95	MM5740	5.49		
LM301AN,AH	.34	CD4011	.25	8T12	4.50	8257	6.95				
LM308H	.99	CD4012	.25	8T13	4.50	8259	6.95				
LM307N	.35	CD4013	.45	8T20	4.50	8275	6.95				
LM308N	.65	CD4014	.65	8T23	4.50	8279	6.95				
LM311N	.64	CD4015	.65	8T25	2.25	8T97	5.95				

4116 200ns Dynamic RAM 8/$15.40

ELECTRONIC SYSTEMS KITS

Apple Peripheral Kits

SERIAL I/O INTERFACE 0 to 30,000 baud, D.T.R., Input & output from monitor or basic, or use Apple as intelligent terminal, Bd only (P/N 2) **$14.95**, Kit (P/N 2A) **$51.25**, Assembled (P/N 2C) **$62.95**.

PROTOTYPING BOARD (P/N 7907) **$21.95**.

PARALLEL TRIAC OUTPUT BOARD 8 triacs, each can switch 110V, 6A loads. Bd only (P/N 210) **$19.20**, Kit (P/N 210A) **$119.55**.

OPTO-ISOLATED INPUT BOARD 8 inputs, can be driven from TTL logic. Bd only (P/N 120) **$15.85**, Kit (P/N 120A) **$69.95**.

Interface Kits

SERIAL/PARALLEL INTERFACE Bidirectional, Baud rates from 110 to 19.2K, sw selectable polarity of input and output strobe, 5 to 8 data bits, 1 or 2 stop bits, pa.ity odd or even or none, all characters contain a start bit, +5 & −12V required.Bd only (P/N 101) **$11.95**, Kit (P/N 101A) **$42.89**.

RS-232/TTL INTERFACE Bidirectional, requires ±12V, Kit (P/N 232A) **$9.95**.

RS-232/20mA INTERFACE Bidirectional, 2 passive opto-isolated circuits, Kit (P/N 7901A) **$14.95**.

PROM Eraser

Will erase 25 PROMs in 15 minutes. Ultraviolet, assembled. 25 PROM capacity **$37.50** (with timer **$69.50**). 6 PROM capacity OSHA/UL version **$78.50** (with timer **$108.50**).

NiCad Battery Fixer/Charger Kit

Opens shorted cells that won't hold a charge and then charges them up, all in one kit w/full parts and instructions. No PC board. **$8.95**

Z80 Microcomputer

16 bit I/O, 2 MHz clock, 2K RAM, ROM Breadboard space. Excellent for control. Bare Board **$28.50**. Full Kit **$99.00**. Monitor **$20.00**. Power Supply Kit **$35.00**. Tiny Basic **$30.00**.

Modem Kit $60.00

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included. Bd. only $17.00. Article in June *Radio Electronics*.

60 Hz Crystal Time Base Kit $4.40

Converts digital clocks from AC line frequency to crystal time base. Outstanding accuracy.

Video Modulator Kit $9.95

Convert TV set into a high quality monitor w/o affecting usage. Comp. kit w/full instruc.

Multi-volt Computer Power Supply

8v 5 amp, ±18v .5 amp, 5v 1.5 amp, −5v .5 amp, 12v .5 amp, −12v option. ±5v, ±12v are regulated. Basic Kit **$35.95**. Kit with chassis and all hardware **$51.95**. Add $5.00 shipping. Kit of hardware **$16.00**. Woodgrain case **$16.00**. $1.50 shipping.

Type-N-Talk by Votrax

Text to speech synthesizer with unlimited vocabulary, built-in text to speech algorithm, 70 to 100 bits per second speech synthesizer, RS232C interface **$359.00**. Speech IC **$79.95**.

1802 16K Dynamic RAM Kit $149.00

Expandable to 64K. Hidden refresh w/clocks up to 4 MHz w/no wait states. Addl. 16K RAM **$25.00**.

S-100 4-slot expansion $ 9.95
Super Monitor VI.I Source Listing $15.00



RCA Cosmac 1802 Super Elf Computer $106.95

The Super Elf is a small single board computer that does many **big** things. It's an excellent computer for training and for learning programming with its machine language and yet it's easily **expanded** with **additional memory, Full Basic, ASCII Keyboards, video character generation, etc.**

ROM monitor; State and Mode displays; Single step; Optional address displays; Power Supply; Audio Amplifier and Speaker; Fully socketed for all IC's; Full documentation.

The **Super Elf** includes a **ROM** monitor for program loading, editing and execution with **SINGLE STEP for program debugging** which is not included in others at the same price. With **SINGLE STEP** you can see the microprocessor chip operating with the **unique Quest** address and data bus displays **before, during** and **after** executing instructions. Also, CPU mode and instruction cycle are decoded and displayed on 8 LED indicators.

An RCA 1861 **video graphics** chip allows you to connect to your own TV with an inexpensive video modulator to do graphics and games. There is a **speaker system** included for writing your own music or using many music programs already written. The speaker amplifier may also be used to drive relays for control purposes.

A 24 key **HEX keyboard** includes 16 HEX keys plus **load, reset, run, wait, input, memory protect, monitor select** and **single step**. Large, on board displays provide output and optional **high and low address**. There is a 44 pin standard connector slot for PC cards and a 50 pin connector slot for the Quest Super Expansion Board. Power supply and sockets for **all** IC's are included plus a detailed 127 pg. instruction manual which now includes over 40 pgs. of software info, including a series of lessons to help get you started and a music program and graphics target game. Many schools and universities are using the Super Elf as a course of study. OEM's use it for training and R&D.

Remember, other computers only offer Super Elf features at additional cost or not at all. **Compare before you buy. Super Elf Kit $106.95, High address option $8.95, Low address option $9.95. Custom Cabinet** with drilled and labelled plexiglass front panel **$24.95.** All metal Expansion Cabinet, painted and silk screened, with room for 5S-100 boards and power supply **$57.00. NiCad Battery Memory Saver Kit $8.95.** All kits and options also completely assembled and tested.

Questdata, a software publication for 1802 computer users is available by subscription for $12.00 per 12 issues. Single issues $1.50. Issues 1-12 bound $16.50.

Moews Video Graphics **$3.50,** Games and Music **$3.00,** Chip 8 Interpreter **$5.50,** Starship 4K cassette **$14.95.** Exciting and challenging space game. Complete manual included.

Quest Super Basic V5.0

A new enhanced version of **Super Basic** now available. Quest was the first company worldwide to ship a full size Basic for 1802 Systems. A complete function **Super Basic** by **Ron Cenker** including floating point capability with scientific notation (number range ± $.17E^{38}$), 32 bit integer ±2 billion; multi dim arrays, string arrays; string manipulation; cassette I/O; save and load, basic, data and machine language programs; and over 75 statements, functions and operations.

New improved faster version including **renumber** and essentially **unlimited variables.** Also, an exclusive user expandable command library.

Serial and Parallel I/O routines included.

Super Basic on Cassette $55.00.

Free 14 page brochure of complete Super Elf system.

Super Expansion Board with Cassette Interface $89.95

This is truly an astounding value! This board has been designed to allow **you** to decide how you want it optioned. **The Super Expansion Board comes with 4K of low power RAM** fully addressable anywhere in 64K with built-in memory protect and a **cassette interface**. Provisions have been made for all other options on the same board and it fits neatly into the hardwood cabinet alongside the **Super Elf**. The board includes slots for up to 6K of **EPROM** (2708, 2758, 2716 or TI 2716) and is **fully socketed.** EPROM can be used for the monitor and Tiny Basic or other purposes.

A 1K Super ROM Monitor $19.95 is available as an on board option in 2708 EPROM which has been preprogrammed with a program loader/editor and error checking multi file cassette read/write software, (relocatable cassette file) another exclusive from Quest. It includes register save and readout, block move capability and video graphics driver with blinking cursor. Break points can be used with the register save feature to isolate program bugs quickly, then follow with single step. If you have the **Super Expansion Board** and **Super Monitor** the monitor is up and running at the push of a button.

Other on board options include **Parallel Input and Output Ports** with **full handshake**. They allow easy connection of an ASCII keyboard to the input port. **RS 232 and 20 ma Current Loop** for teletype or other device are on board and if you need more memory there are two **S-100** slots for static RAM or video boards. Also a 1K Super Monitor version 2 with video driver for full capability display with Tiny Basic and a video interface board. **Parallel I/O Ports $9.85, RS 232 $4.50, TTY 20 ma I/F $1.95, S-100 $4.50.** A **50 pin connector set** with ribbon cable is available at **$18.95** for easy connection between the **Super Elf** and the **Super Expansion Board.**

Power Supply Kit for the complete system (see Multi-volt Power Supply below).

Rockwell AIM 65 Computer

6502 based single board with full ASCII keyboard and 20 column thermal printer. 20 char. alphanumeric display ROM monitor, fully expandable. **$419.00.** 4K version **$449.00.** 4K Assembler **$35.00.** 8K Basic Interpreter **$85.00.**

Special small power supply 5V 2A 24V .5A assem. in frame **$59.00.** Molded plastic enclosure to fit both AIM 65 and power supply **$52.50.** AIM 65 1K in cabinet with power supply, switch, fuse, cord assem. **$559.00.** 4K **$579.00. A65 4S-5000 AIM 65/4S w/16K RAM and monitor $1295.00.** RAM Board Kit (16K, **$195**) (32K, **$215**). VD640 Video Interface Kit **$119.00.** A&T **$149.00.** Complete AIM 65 in thin briefcase with power supply **$518.00.** Special Package Price: 4K AIM, 8K Basic, power supply, cabinet **$629.00**

AIM 65/KIM/SYM/Super Elf 44 pin expansion board; board with 3 connectors **$22.95.**



Super Color S-100 Video Kit $129.95

Expandable to 256 x 192 high resolution color graphics. 6847 with all display modes computer controlled. Memory mapped. 1K RAM expandable to 6K. S-100 bus 1802, 8080, 8085, Z80, etc. **Dealers: Send for excellent pricing/margin program.**

Elf II Adapter Kit $24.95

Plugs into Elf II providing Super Elf 44 and 50 pin plus S-100 bus expansion. (With Super Expansion). High and low address displays, state and mode LED's optional **$18.00.**

TERMS: $5.00 min. order U.S. Funds. Calif. residents add 6% tax.
$10.00 min. VISA and MasterCard accepted. $1.00 insurance optional.
Shipping: Add 5%; orders under $25.00—10%.

Prices subject to change

FREE: Send for your copy of our NEW 1982 QUEST CATALOG. Include 88¢ stamp.

ramsey the first name in Counters !



9 DIGITS 600 MHz $129.95 WIRED

The CT-90 is the most versatile, feature packed counter available for less than $300.00! Advanced design features include; three selectable gate times, nine digits, gate indicator and a unique display hold function which holds the displayed count after the input signal is removed! Also, a 10mHz TCXO time base is used which enables easy zero beat calibration checks against WWV. Optionally; an internal nicad battery pack, external time base input and Micro-power high stability crystal oven time base are available. The CT-90, performance you can count on!

PRICES:

CT-90 wired, 1 year warranty	$129.95
CT-90 Kit, 90 day parts warranty	109.95
AC-1 AC adapter	3.95
BP-1 Nicad pack + AC Adapter/Charger	12.95
OV-1, Micro-power Oven time base	49.95
External time base input	14.95

SPECIFICATIONS:

Range:	20 Hz to 600 MHz
Sensitivity:	Less than 10 MV to 150 MHz Less than 50 MV to 500 MHz
Resolution:	0.1 Hz (10 MHz range) 1.0 Hz (60 MHz range) 10.0 Hz (600 MHz range)
Display:	9 digits 0.4" LED
Time base:	Standard-10.000 mHz, 1.0 ppm 20-40°C. Optional Micro-power oven-0.1 ppm 20-40°C
Power:	8-15 VAC @ 250 ma

7 DIGITS 525 MHz $99.95 WIRED

SPECIFICATIONS:

Range:	20 Hz to 525 MHz
Sensitivity:	Less than 50 MV to 150 MHz Less than 150 MV to 500 MHz
Resolution:	1.0 Hz (5 MHz range) 10.0 Hz (50 MHz range) 100.0 Hz (500 MHz range)
Display:	7 digits 0.4" LED
Time base:	1.0 ppm TCXO 20-40°C
Power:	12 VAC @ 250 ma

The CT-70 breaks the price barrier on lab quality frequency counters. Deluxe features such as; three frequency ranges - each with pre-amplification, dual selectable gate times, and gate activity indication make measurements a snap. The wide frequency range enables you to accurately measure signals from audio thru UHF with 1.0 ppm accuracy - that's .0001%! The CT-70 is the answer to all your measurement needs, in the field, lab or ham shack.

PRICES:

CT-70 wired, 1 year warranty	$99.95
CT-70 Kit, 90 day parts warranty	84.95
AC-1 AC adapter	3.95
BP-1 Nicad pack + AC adapter/charger	12.95

7 DIGITS 500 MHz $79.95 WIRED

PRICES:

MINI-100 wired, 1 year warranty	$79.95
AC-Z Ac adapter for MINI-100	3.95
BP-Z Nicad pack and AC adapter/charger	12.95

Here's a handy, general purpose counter that provides most counter functions at an unbelievable price. The MINI-100 doesn't have the full frequency range or input impedance qualities found in higher price units, but for basic RF signal measurements, it can't be beat! Accurate measurements can be made from 1 MHz all the way up to 500 MHz with excellent sensitivity throughout the range, and the two gate times let you select the resolution desired. Add the nicad pack option and the MINI-100 makes an ideal addition to your tool box for "in-the-field" frequency checks and repairs.

SPECIFICATIONS:

Range:	1 MHz to 500 MHz
Sensitivity:	Less than 25 MV
Resolution:	100 Hz (slow gate) 1.0 KHz (fast gate)
Display:	7 digits, 0.4" LED
Time base:	2.0 ppm 20-40°C
Power:	5 VDC @ 200 ma

8 DIGITS 600 MHz $159.95 WIRED

NEW READ RECEIVER FREQUENCY

SPECIFICATIONS:

Range:	20 Hz to 600 MHz
Sensitivity:	Less than 25 mv to 150 MHz Less than 150 mv to 600 MHz
Resolution:	1.0 Hz (60 MHz range) 10.0 Hz (600 MHz range)
Display:	8 digits 0.4" LED
Time base:	2.0 ppm 20-40°C
Power:	110 VAC or 12 VDC

The CT-50 is a versatile lab bench counter that will measure up to 600 MHz with 8 digit precision. And, one of its best features is the Receive Frequency Adapter, which turns the CT-50 into a digital readout for any receiver. The adapter is easily programmed for any receiver and a simple connection to the receiver's VFO is all that is required for use. Adding the receiver adapter in no way limits the operation of the CT-50, the adapter can be conveniently switched on or off. The CT-50, a counter that can work double-duty!

PRICES:

CT-50 wired, 1 year warranty	$159.95
CT-50 Kit, 90 day parts warranty	119.95
RA-1, receiver adapter kit	14.95
RA-1 wired and pre-programmed (send copy of receiver schematic)	29.95

DIGITAL MULTIMETER $99.95 WIRED

PRICES:

DM-700 wired, 1 year warranty	$99.95
DM-700 Kit, 90 day parts warranty	79.95
AC-1, AC adaptor	3.95
BP-3, Nicad pack +AC adapter/charger	19.95
MP-1, Probe kit	2.95

The DM-700 offers professional quality performance at a hobbyist price. Features include; 26 different ranges and 5 functions, all arranged in a convenient, easy to use format. Measurements are displayed on a large 3½ digit, ½ inch LED readout with automatic decimal placement, automatic polarity, overrange indication and overload protection up to 1250 volts on all ranges, making it virtually goof-proof! The DM-700 looks great, a handsome, jet black, rugged ABS case with convenient retractable tilt bail makes it an ideal addition to any shop.

SPECIFICATIONS:

DC/AC volts:	100uV to 1 KV, 5 ranges
DC/AC current:	0.1uA to 2.0 Amps, 5 ranges
Resistance:	0.1 ohms to 20 Megohms, 6 ranges
Input impedance:	10 Megohms, DC/AC volts
Accuracy:	0.1% basic DC volts
Power:	4 'C' cells

AUDIO SCALER

For high resolution audio measurements, multiplies UP in frequency.

- Great for PL tones
- Multiplies by 10 or 100
- 0.01 Hz resolution!

$29.95 Kit $39.95 Wired

ACCESSORIES

Telescopic whip antenna - BNC plug	$ 7.95
High impedance probe, light loading	15.95
Low pass probe, for audio measurements	15.95
Direct probe, general purpose usage	12.95
Tilt bail, for CT 70, 90, MINI-100	3.95
Color burst calibration unit, calibrates counter against color TV signal	14.95

COUNTER PREAMP

For measuring extremely weak signals from 10 to 1,000 MHz. Small size, powered by plug transformer-included.

- Flat 25 db gain
- BNC Connectors
- Great for sniffing RF with pick-up loop

$34.95 Kit $44.95 Wired

ramsey electronics, inc. VISA MasterCard
2575 Baird Rd. Penfield, NY 14526 ✓ 62

PHONE ORDERS
CALL 716-586-3950

TERMS: Satisfaction guaranteed or your money back. Add $1.50 for shipping, insurance (up to max. amount $100). Overseas add 15%. COD add $2. Orders under $10 add $1.50. NY residents add 7% tax.

✓ See List of Advertisers on page 114

...COMMUNICATIONS CENTER...

1-800-228-4097

Phone Hours: 8 AM — 5 PM CDT Mon-Sat

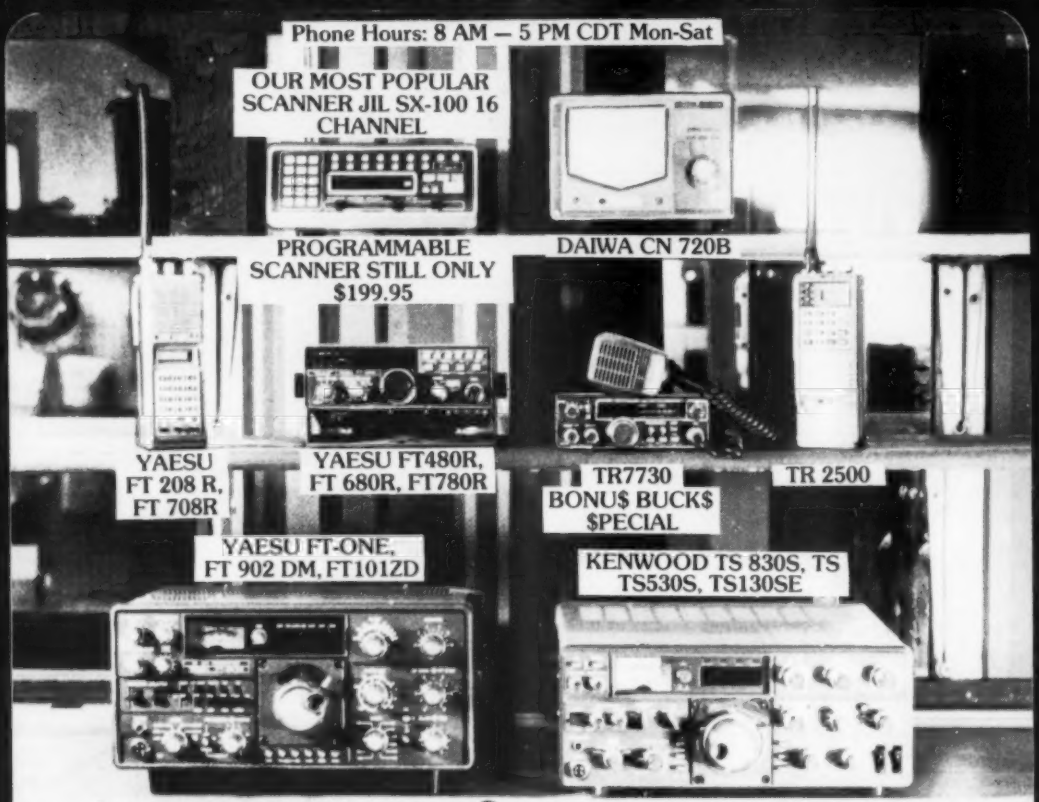
OUR MOST POPULAR SCANNER JIL SX-100 16 CHANNEL
PROGRAMMABLE SCANNER STILL ONLY $199.95
DAIWA CN 720B
YAESU FT 208 R, FT 708R
YAESU FT480R, FT 680R, FT780R
TR7730 BONU$ BUCK$ $PECIAL
TR 2500
YAESU FT-ONE, FT 902 DM, FT101ZD
KENWOOD TS 830S, TS TS530S, TS130SE

Communications Center is proud to offer name brand amateur gear at discount prices backed by knowledgable sales & service personnel. We also stock a wide line of reconditioned used gear. Call today for your cash quote or trade.

BIG POWER ON TWO METERS. 500 WATTS!! LIST $599.00
DENTRON CLIPPERTON V
INTRODUCTORY SPECIAL
$489.95

MIRAGE B 108
B-1016, B 3016, D 1010
CALL FOR SPECIAL



...YOUR ELECTRONICS CENTER...

1840 "O" Street Lincoln, Nebraska 68508
In Nebraska Call (402) 476-7331

WE TRADE

master charge

VISA

28

• FM • SSB • CW • ATV • OSCAR
• LINKS • REPEATERS • TRANSMITTERS
• RECEIVERS • PREAMPS • CONVERTERS
• TRANSCEIVERS • POWER SUPPLIES • PA'S

QUALITY VHF/UHF KITS AT AFFORDABLE PRICES

-NEW-



FM-5 PC Board Kit – **ONLY $159.95**
complete with controls, heatsink, etc.

★ **SPECIAL OFFER** Free cabinet kit, complete with speaker, knobs, connectors, hardware. A $59.95 value, yours free with purchase of kit. Hurry! Offer limited. ★

SAVE A BUNDLE ON VHF FM TRANSCEIVERS!
10 watts, 5 Channels, for 6M, 2M, or 220

HIGH QUALITY FM MODULES FOR REPEATERS, LINKS, TELEMETRY, ETC.

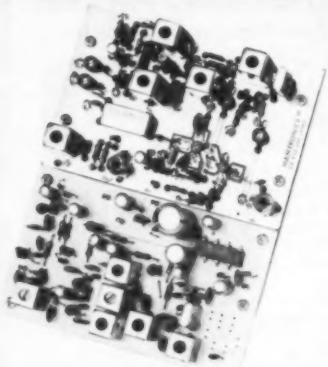



- **R76 VHF FM RECEIVER** for 10M, 6M, 2M, 220, or commercial bands. Fantastic selectivity options. Kits from $84.95 to $109.95
- **R450 UHF FM RECEIVER** for 380-520 MHz bands. Kits in selectivity options from $94.95
- **R110 VHF AM RECEIVER** Kit for vhf aircraft band or ham bands. Only $84.95.
- **COR KITS** With audio mixer and speaker amplifier. Only $29.95.
- **CWID KITS** 158 bits, field programmable, clean audio. Only $59.95.
- **A16 RF TIGHT BOX** Deep drawn alum. case with tight cover and no seams. 7 x 8 x 2 inches. Only $18.00.
- **SCANNER CONVERTERS** Copy 72-76, 135-144, 240-270, 400-420, or 806-894 MHz bands on any scanner. Wired/tested Only $79.95.
- **T51 VHF FM EXCITER** for 10M, 6M, 2M, 220 MHz or adjacent bands. 2 Watts continuous. Kits only $54.95.
- **T451 UHF FM EXCITER** 2 to 3 Watts on 450 ham band or adjacent. Kits only $64.95.
- **VHF & UHF LINEAR AMPLIFIERS.** Use on either FM or SSB. Power levels from 10 to 45 Watts to go with exciters & xmtg converters. Kits from $69.95.

VHF & UHF TRANSMITTING CONVERTERS

For SSB, CW, ATV, FM, etc. Available for 6M, 2M, 220, 440 with many IF input ranges. Converter board kit only at $79.95 (VHF) or $99.95 (UHF) or kits complete with PA and cabinet as shown.

VHF & UHF RECEIVING CONVERTERS

20 Models cover every practical rf and if range to listen to SSB, FM, ATV, etc. on 6M, 2M, 220, 440, and 110 aircraft band. Even convert weather down to 2M! Kits from $39.95 and wired units.

VHF & UHF RECEIVER PREAMPS. Low noise.

VHF Kits from 27 to 300 MHz. UHF Kits from 300 to 650 MHz. Broadband Kits: 20-650 MHz. Prices start at $14.95 (VHF) and $18.95 (UHF). All preamps and converters have noise figure 2dB or less.

- **Call or Write for FREE CATALOG**
  (Send $1.00 or 4 IRC's for overseas MAILING)
- **Order by phone or mail ● Add $2 S & H per order**
  (Electronic answering service evenings & weekends)
  Use VISA, MASTERCARD, Check, or UPS COD.

hamtronics, inc.
65-R MOUL RD. • HILTON NY 14468
Phone: 716-392-9430 ⌐33

Hamtronics® is a registered trademark

SPECIALISTS · CUSHCRAFT · DRAKE · HAM KEY · HUSTLER · HY-GAIN · ICOM · KANTRONICS · LARSEN · MFJ · MORGAIN · PANASONIC · RAMSEY · SHURE · SONY · TELEX · TEN TEC · TRAC · TRANSCOM · VAN GORDON · VOCOM

ANTENNA SPECIALISTS · AVANTI · ARRL PUBS · AMECO · BASH · BENCHER · B&W · BIRD · CALLBOOK · COMMUNICATIONS

SONY ICF2001

DIGITAL DIRECT ACCESS SHORT WAVE RECEIVER

- 150KHz -30 MHz + FM BROADCAST
- PLL SYNTHESIZED WITH SCANNING & MEMORY
- AC ADAPTOR INCLUDED
- 1 YEAR SONY U.S.A. FACTORY LIMITED WARRANTY
- AM/CW/SSB
- SURPRISINGLY AFFORDABLE

CALL AND ORDER YOURS TODAY

OUR BEST-SELLING MULTI-BAND!

MORGAIN

AS LOW AS $94.50

Add $5.00 for shipping (Cont'l U.S.A.)

- One half the length of conventional half-wave dipoles
- Multi-band, Multi-frequency.
- Maximum efficiency — no traps, loading coils, or stubs.
- Fully assembled and pre-tuned — no measuring, no cutting.
- All weather rated — 1 KW AM, 2.5 KW CW or PEP SSB.
- Proven performance — more than 10,000 have been delivered.
- Permit use of the full capabilities of today's 5-band xcvrs.
- One feedline for operation on all bands.

80-40HD/A 80/40 Mtr bands (69).... **99.00**
75/40HD/A 75/40 Mtr bands (66).... **94.50**
75-10HD/A 75/40/20/15/10 Mtr (66). . **126.95**
80-10HD/A 80/40/20/15/10 Mtr (69). . **132.00**



$59.95 plus $3.00 shipping (Cont'l U.S.)

Eavesdropper

SHORT WAVE BROADCAST RECEIVING ANTENNA

- AUTOMATIC BANDSWITCHING!
- COMPLETELY WEATHERPROOF!
- COMPLETE, NO ASSEMBLY NEEDED!
- 80, 49, 41, 31, 25, 19, 16, 13 & 11M BANDS!

All the world's shortwave broadcast bands are yours with the Eavesdropper All-Band antenna. Individually tuned traps make the Eavesdropper work like seven separate antennas, each tuned to a different international broadcast band. Also covers 11, and 60M bands as well. Its 100 foot, 72 ohm balanced feedline provides an exact match to the antenna on every band. Comes completely assembled, and ready to install with 50 ft. of 450 lb. test nylon rope. Overall length: 42'10". Wire: #14 copper. Bandswitching: Automatic. Impedance to rcvr: 50-75 ohms balanced.

Only $59.95

AMECO ALL-BAND PREAMP!

Our Most Popular Preamplifier

MODEL PLF-2

$52.95

plus $3.00 shipping

MODEL PLF-2...Improves weak signals as much as image and spurious rejection of most receivers. Direct switching to rec. or preamp. Includes pwr. supp. 117 VAC wired & tested. **$52.95**

MODEL PLF-2E...240 VAC 50-60 Hz operation. **$57.95**

MODEL PT-2...For transceiver use. Continuously tunable from 6 to 160 meters. Features dual-gate FET transistor amplifier for improved receiver sensitivity and low noise figure. Requires no transceiver modifications and can handle up to 250W transceiver output, 117 VAC 60 Hz. . . . **$79.95**

MODEL PT-2E...240 VAC 50-60 Hz operation **$84.95**

TRANSCOM

PROGRAMMABLE SUB AUDIBLE TONE ENCODER FOR ICOM HANDHELDS.

NEW!

$29.95

Plus $2.00 shipping and handling

- ONLY 1.1" X 55" X .2"
- PRESET OUTPUT LEVEL FOR IC2A
- LOW TONE DISTORTION LESS THAN 1% THD
- TONE STABILITY ± .2% Hz FROM -20C TO +70C
- 1 YEAR LIMITED FACTORY WARRANTY
- 5VDC POWERED

ICOM

WE'VE SOLD FM GEAR FOR 14 YEARS & IN OUR OPINION ICOM IS... "SIMPLY THE BEST"

IC2A, IC2AT

OUR MOST POPULAR HAND HELD & THE BEST VALUE AVAILABLE

- COMPACT
- QUALITY CONSTRUCTION
- VERSATILE
- AFFORDABLE
- WIDE RANGE OF ACCESSORIES AVAILABLE

NEW!

IC3AT (220 MHz)
IC4AT (440 MHz)

IC25A

A LITTLE PACKAGE WITH A LOT OF BIG FEATURES...

- 25W OUTPUT
- MEMORIES
- ENCODING MIC
- SCANNING

CALL FOR PRICE & AVAILABILITY

TO ORDER: CALL OR WRITE. MASTER CARD, VISA, MONEY ORDERS, PERSONAL CHECKS TAKE 3 WEEKS TO CLEAR, ACCEPTED. **INTERNATIONAL ORDERS WELCOME,** PLEASE REQUEST PRO FORMA INVOICE.

HOURS: MON. THRU WED. 9:30-6:00, THURS-FRI. 9:30-8:00, SAT. 9:30-3:00

STOP BY AND VISIT WHEN IN THE CHICAGOLAND AREA!!

SPECTRONICS, INC.

1009 GARFIELD ST. OAK PARK, IL. 60304

PHONE (312) 848-6777

UTIC MINI STEREO AM/FM RECEIVER WITH HEADPHONES

For Joggers, Cyclists, Skaters & Sports Events!

FEATURES: Lightweight headphones. Left/right balance control. Full fidelity stereo sound. Additional black soft carrying case & shoulder strap. Belt clip (hands free). Operates on 3 AA cell batteries (not incl.). Compact size: 3⅞" x 4⅞" x 1". Wt. 6 oz.

Model 2830 List Price $89.95 ..... **$34.95**

SPEAKERS

Part #	1	10
A0201	1.25	.99

2¼" Round — 8 Ohm .25 Watt (4" Leads) Size: 2⅛" x ⅝"

Part #	1	10
SF-25016	1.39	1.25

2½" Square — 16 Ohm .25 Watt (4 mount. holes) Large Ceramic Magnet Size: 2⅝" x 2⅝" x ¾"

National Semiconductor RAM SALE

STATIC RAMS

MM2114N-2 4K (200NS) ..... **$2.49 each**
(6 EACH $16.95/tot) (100 EACH $195.95/tot)

MM2114N-2L 4K (200NS) Low Power ..... **$2.95 each**
(6 EACH $19.95/tot) (100 EACH $225.00/tot)

MM2147N 4K (70NS) ..... **$4.95 each**
(6 EACH $34.95/tot) (100 EACH $419.95/tot)

MM6116P-4 16K (200NS) ..... **$14.95 each**
(6 EACH $99.95/tot) (100 EACH $1195.00/tot)

DYNAMIC RAMS

MM4164N-20 64K (200NS) ..... **$14.95 each**
(6 EACH $99.95/tot) (100 EACH $1195.00/tot)

MM5290N-2 16K (150NS) 4116 ..... **$2.95 each**
(6 EACH $19.95/tot) (100 EACH $225.00/tot)

MM5290N-4 16K (250NS) 4116 ..... **$1.95 each**
(6 EACH $14.95/tot) (100 each $175.00/tot)

EPROM Erasing Lamp



- Erases 2708, 2716, 1702A, 5203U, 5204Q, etc.
- Erases up to 4 chips within 20 minutes.
- Maintains constant exposure distance of one inch.
- Special conductive foam liner eliminates static build-up.
- Built-in safety lock to prevent UV exposure.
- Compact — only 7-5/8" x 2-7/8" x 2"
- Complete with holding tray for 4 chips.

UVS-11EL Replacement Bulb **$16.95**

UVS-11E **$79.95**

JOYSTICKS

JS-5K 5K Linear Taper Pots **$5.25**
JS-100K 100K Linear Taper Pots **$4.95**
JVC-40 40K (2) Video Controller in case **$4.95**

MUFFIN® FAN

The dependable, low cost, largest selling fan for commercial cooling applications.

- 105cfm free air delivery
- 4.68" sq. x 1.50" depth. Weight - 17 oz.
- acoustical rating as low as RC-38
- more than 10 yrs. cont. duty at 10°C
- impedance protected
- for ambients to 70°C
- UL yellow card recognized & CSA approved

MU2A1 ..... **$9.95 ea.**

JE215 Adjustable Dual Power Supply

NEW!

General Description: The JE215 is a Dual Power Supply with independent adjustable positive and negative output voltages. A separate adjustment for each of the supplies provides the user unlimited applications for IC current voltage requirements. The supply can also be used as a general all-purpose variable power supply.

FEATURES:
- Adjustable regulated power supplies, pos. and neg. 1.2VDC to 15VDC.
- Power Output (each supply): 5VDC @ 900mA, 10VDC@ 750mA, 12VDC @ 500mA, and 15VDC @ 175mA.
- Two, 3-terminal adj. IC regulators with thermal overload protection.
- Heat sink regulator cooling
- LED "on" indicator
- Printed Board Construction
- 120VAC Input
- Size: 3-1/2" w x 6-1/16"L x 2"H

JE215 Adj. Dual Power Supply Kit (as shown) .. $24.95

(Picture not shown but similar in construction to above)
JE200 Reg. Power Supply Kit (5VDC, 1 amp) ... $14.95
JE205 Adapter Brd. (to JE200) : 5, -9 & +12V. $12.95
JE210 Var. Pwr. Sply. Kit, 5-15VDC, to 1.5amp. $19.95

MICROPROCESSOR COMPONENTS

8080A/8080A SUPPORT DEVICES

INS8080A	CPU	4.95
DP8212	8-Bit Input/Output	3.75
DP8214	Priority Interrupt Control	5.95
DP8216	Bi-Directional Bus Driver	3.49
DP8224	Clock Generator/Driver	3.95
DP8226	Bus Driver	3.49
DP8228	System Controller/Bus Driver	4.95
DP8238	System Controller	5.95
INS8250	I/O Expander for 48 Series	9.95
INS8350	Asynchronous Comm. Element	35.95
DP8251	Prog. Comm. I/O (USART)	6.75
DP8253	Prog. Interval Timer	8.95
DP8255	Prog. Peripheral I/O (PPI)	5.95
DP8257	Prog. DMA Control	9.95
DP8259	Prog. Interrupt Control	9.95
DP8228	Prog. CRT Controller	25.95
DP8279	Prog. Keyboard/Display Interface	9.95
DP8303	System Timing Element	6.95
DP8304	8-Bit Bi-Directional Receiver	3.95
DP8307	8-Bit Bi-Directional Receiver	3.95
DP8308	8-Bit Bi-Directional Receiver	3.95
DP8310	Octal Latched Peripheral Driver	5.25
DP8311	Octal Latched Peripheral Driver	5.25

6800/6800 SUPPORT DEVICES

MC6800	MPU	7.95
MC6802CP	MPU with Clock and RAM	14.95
MC6810API	128x8 Static RAM	4.75
MC6821	Peripheral Inter. Adapt (MC6820)	7.49
MC6828	Priority Interrupt Controller	17.25
MC6830L8	1024x8-Bit ROM (MC6A30-8)	14.95
MC6850	Asynchronous Comm. Adapter	6.75
MC6852	Synchronous Serial Data Adapter	6.75
MC6860	0-600bps Digital MODEM	19.95
MC6861	2400bps Modem/Mux	39.95
MC6880A	Quad 3-State Bus Trans. (MC8T26)	2.25

MICROPROCESSOR CHIPS

Z80 (780C)	CPU (MK3880N) (3MHz)	11.95
Z80A (780-1)	CPU (MK3880N-4) (4MHz)	13.95
Z80PIO	MPU	29.95
2650	MPU	39.95
IDM2901ADC	CPU—4-Bit Slice (Com. Temp.Grade)	29.95
MC5801	MPU w/Clock (8041 Bytes Memory)	15.95
INS8128N-5	MPU—9-Bit (9MHz)	7.95
INS4004N-4	CPU—Syl.Chip 4-Bit (1Kbytes RAM)	9.95
INS8004N-4	CPU (1K Bytes RAM)	24.95
INS8700N	CPU—4# Bytes RAM	24.95
INS8073N	CPU w/Basic Micro Interpreter	29.95
P8080	CPU	9.95
TMS9900JL	MPU—16-Bit	39.95

1173AN-1 39 Tone Musical MPU Chip 8.95

SHIFT REGISTERS

MM5504H	Dual 25-Bit Dynamic	.50
MM5004H	Dual 50-Bit Dynamic	.50
MM5005H	Dual 100-Bit Static	.50
MM5104H	Dual 64-Bit Accumulator	.50
MM1402N	256-Bit Dynamic	2.25
MM5016N	1024-Bit Dynamic/Accumulator	1.95
MM5002N	1024/512-Bit Dynamic	1.95
MM5024N	Octal 64-Bit	5.95
MM5025N	Octal 80-Bit	5.95
2504V (1602A)	100-Bit Dynamic	1.25
2518N	Hex 32-Bit Static	3.95
2527V	Dual 132-Bit Static	2.95
2533V	512-Bit Dynamic	.79
1302PC	P/To (Dual 60)	6.75

DATA ACQUISITION

DC10	Mostek DC/DC Convert. +5V to 9V	$2.95
MC3810P	Floppy Disc Read AMP System	4.95
MC1408L7	7-Bit D/A Converter (DAC88/LCN)	4.95
MC1408L8	8-Bit D/A Converter (DAC88/LCN)	5.75
AF130-1CN	Super Active Filter 2.5%	9.95
AF131-1CJ	Touch Tone Low Band Filter	10.95
AF132-1CJ	Touch Tone High Band Filter	10.95
LM301AH	Super Gain Op Amp	1.35
LM334Z	Constant Current Source	1.49
LM335Z	Temperature Transducer	1.49
LF356H	JFET Input Op Amp	1.10
LF398H	Sample & Hold Amplifiers	5.95
LM369H	Temp. Comp. Prec. Ref. (2ppm/°C)	5.00
ADC0804LCN	8-Bit A/D Converter (1 LSB)	4.95
DAC0808LCN	8-Bit D/A Converter (8 bit, 1/2 L.)	2.25

DATA ACQUISITION (CONTINUED)

ADC0808CCN	8-Bit A/D Converter (8-Ch. Multi.)	5.25
ADC0811CCN	8-Bit A/D Converter (8-Ch. Multi.)	10.95
DAC1020LCN	20-Bit D/A Conv. Micro. Comp. (0.05%)	13.95
DAC1220LCN	20-Bit D/A Conv. Micro. Comp. (0.20%)	9.95
DAC1000LCN	10-Bit D/A Converter (0.05% Lin.)	8.49
DAC1021LCN	10-Bit D/A Converter (0.20% Lin.)	5.95
DAC1221LCN	12-Bit D/A Converter (0.20% Lin.)	9.95
CD4051N	8-Channel Multiplexer	1.35
AY-5-1013	30K BAUD UART	6.95

RAM'S

1101	256x1 Static	1.49
1103	1024x1 Dynamic	.99
2101 (5101)	256x4 Static	3.95
2102	1024x1 Static	1.49
2111-02	256x4 Static	1.50
2112 (5111)	256x4 Static	3.95
2107	4096x1 Static MOS	4.75
2114	1024x4 Static 450ns	2.25
2114L	1024x4 Static 450ns Low Power	2.49
2114-2	1024x4 Static 200ns	2.95
2114L-2	1024x4 Static 200ns Low Power	2.75
2125B	256x1 Static	6.95
4096H-4 (UPD450)	16K Dynamic 350ns (MM4096H-4)	2.95
4366N-3	64K Dynamic 350ns	14.75
MM2167N	4096x1 Fast 70ns	4.95
5257	256x4 Static	7.95
MM5261	1024x1 Dynamic Fully Decoded	.79
MM5262	2Kx1 Dynamic	.49
MM5290/2107	16Kx1 Dynamic	2.95
MM5290N-2 (4116)	16K Dynamic 150ns (UPD416C-2)	2.95
MM5298J-3A	8K Dyn. 200ns (Power is of MM5290.)	1.95
HM6130-4	1Kx7 (Hi-Cl) Static 200ns	10.75
82525	64 Bit RAM (16x4NC)	3.49
UPD43A/MM4027	4K Dynamic 16-pin	4.95
TMS4044-40/4L	4Kx1 Dynamic	9.95
TM4044N	2048x4 Static	9.95

PROMS/EPROMS

1702A	2K UV Erasable PROM	5.95
2708	8K EPROM	7.95
TMS2716	16K EPROM (-5V, +5V, +12V)	9.95
2716 Intel (SMJ)	16K EPROM (Single +5V)	9.95
2732 Intel TI	32K EPROM	17.95
2758	8K EPROM (400ns) (Single +5V)	7.49
2758Q	8K EPROM (Hitachi) HN462758	49.95
5303	256x8 PROM	14.95
82S23 (74S288)	32x8 PROM (Open Collector)	3.95
82S115	4096 Bipolar PROM	14.95
82S123 (74S288)	32x8 Tri-State Bipolar PROM	3.95
82S185	8K PROM	16.95

— Over 30 More PROMS Listed in Our Catalog —

ROM'S

2513 (2160)	Character Generator (Lobber Case)	5.95
2513 (3601)	Character Generator (Lower Case)	9.95

NMOS READ ONLY MEMORIES

MCM6670P	128x8x7 ASCII Shifted w/Drivers	13.50
MCM6676P	192x5x7 Math Symbol & Pictures	13.50
MCM6678P	128x7x7 Alpha, Control Char. Gen.	13.50

MICROPROCESSOR MANUALS

M-Z80	User Manual	7.50
M-CDP1802	User Manual	7.50
M-3000	User Manual	5.00

SPECIAL FUNCTION

DS8925CN	Dual MOS Clock Driver (SMJ)	3.50
DS8926CN	Dual MOS Clock Driver (SMJ)	1.95
INS1771N-1	Floppy Disc Controller	29.95
INS8334N	Communication Chip	19.95
MM5369N	Microprocessor Real Time Clock	8.49
MM5311N	Microprocessor Compatible Clock	11.95
COP402N	Microcontroller with 64-Digit RAM and Direct LED Drive	6.95
COP402MVN	Microcontroller with 64-Digit RAM & 4-Bit LED Drive w/N Buss Int.	7.49
COP410N	28-Sec/VAC Fluor. Driver (28-pin pkg.)	3.25

TELEPHONE/KEYBOARD CHIPS

AY-5-9100	Push Button Telephone Dialer	14.95
AY-5-9200	Repertory Dialer	14.95
AY-5-2376	CMOS Clock Generator	4.95
AY-5-2376	Keyboard Encoder (66 keys)	11.95
HD0165-5	Keyboard Encoder (35 keys)	7.95
HD7811	Keyboard Encoder (35 keys)	9.49
HC923	Keyboard Encoder (20 keys)	5.75
MM5740N	Push Button Pulse Dialer	7.95
MM5740N-5	16-Volt Key Serial Keyboard Encoder	8.95

2400-10

EECO Rocker DIP Switch — "Mini-Dip™" 2400 Series
THE MOST UNIQUE DIP SWITCH AVAILABLE!

Mini-DIP is designed to retrofit all major brands of Dip switches. Unique features include toshiba rod design to prevent accidental actuation and gold self-wiping contact. One-piece housing and press-fit terminals prevent contamination. 2-10 station Form 'A' and 1-5 station Form 'C'.
• Terminals on .100 x .300 (2.54 x 7.62) centers • PCB or dip socket insertions • Positive cleaning/wiping action with gold contact • Total seal and bottom seal

Part No.	Pos.	Configuration	Socket	Price
2400-2	2	12	8 pin	.79 - 10/ 6.95
2400-3	3	123	8 pin	.89 - 10/ 7.95
2400-4	4	1234	8 pin	.99 - 10/ 8.95
2400-4BCD	4	ABCD	8 pin	.99 - 10/ 8.95
2400-5C	5	C54321	14 pin	1.09 - 10/ 9.95
2400-6	6	123456	16 pin	1.19 - 10/10.95
2400-7	7	1234567	14 pin	1.19 - 10/10.95
2400-8	8	12345678	16 pin	1.29 - 10/11.95
2400-9	9	123456789	18 pin	1.39 - 10/12.95
2400-10	10	0123456789	20 pin	1.49 - 10/13.95

GRAB BAG SPECIALS

GB180 **100 pieces Robot/Slot Car Gears, Shafts, Wheels, Motors** **$9.95**

CAPACITORS

Part No.	Description	Price
GB100	100 each Ceramic Disc (150pf—5mfd)	$2.00
GB101	50 each Mylar	4.00
GB102	50 each Electrolytic	4.00
GB103	50 each Tantalum (Solid or Dipped)	4.00
GB170	40 each Dipped Mica (10pf-1000pf @ 100-500V)	4.00

INTEGRATED CIRCUITS

GB108	10 each TTL Se-es - marked (7400, 74107, 74123, etc.)	$4.00
GB109	5 each TTL Se-es - marked (74001, 207, 741, 203, etc.)	4.00
GB148	20 each Exar — marked (XR220, 1310, 4136, etc.)	4.00
GB109	5 each Fairchild — marked (2510, 2518, 2522, 2533, etc.)	4.00
GB157	20 each DTL Se-es - marked (CA3130, 932, 930, 946, etc.)	2.00
GB108	5 each Linear Active Reg. types (TO-3 case) (7805, 08, 12, 15, 18, 24, etc.) Linear marked	4.00
GB108	5 each Linear Active Reg. types (TO-3 case) (7905, 08, 12, 15, 18, 24, etc.) Linear marked	4.00
GB170	25 each Assorted TO-5 TTL Series	5.00
GB172	10 each 1Watt Positive Volt. Reg. (TO-5 case) (78M05, 8, 12, 15, 20, 24, etc.) Linear marked	5.00

LEDS — LAMPS — READOUTS

GB110	100 each Assorted LEDs (colors & sizes)	$2.00
GB111	40 each Int'l 2 Neon Type Lamps	2.00
GB112	20 ea. Numeric Readouts, (cathodes, cloks, Anodes, LEDS to Panaplex — new, used and rejects	2.00
GB102	50 each 7 Segment Displays (various colors and sizes)	5.00

POTENTIOMETERS

GB113	30 each Miniature Trimmers (100 ohm-1 Meg)	$4.00
GB134	10 each 3/8" square single turn PC Mount (untested — 10 ohm to 500 ohm) marked	3.00
GB135	10 each 3/8" square single turn PC Mount (untested — 1K to 50K) marked	3.00
GB136	10 each 3/8" square single turn PC Mount (untested — 100K to 1 Meg) marked	3.00
GB133	100 ea. 3/8" sq. single turn Trim & Spin (untested — assorted values — 100 ohm-5 Meg)	5.00

DIODES

GB171	50 each Assorted Semiconductor (1N34, 4005, IN2155)	$2.00
GB107	100 each Silicon (1N914/4148/4448)	2.00
GB164	200 each marked, unmarked rectifiers & zeners	2.00
GB175	100 ea. 1 amp. 3 amp (switcher/bridge) silicon rectifiers	2.00

RESISTORS

Part No.	Description	Price
GB115	500 each 1/4 watt resistor assortment	$2.00
GB116	500 each 1/2 watt resistor assortment	2.00
GB110	20 ea. Wire Wound 5,10,20W (1-10Ω ohm)	4.00
GB104	100 each 1 and 2 watt metal oxide resistors	4.00
GB175	500 each 1/4, 1/2, 1 watt marked/unmarked resistors	4.00

SWITCHES

GB120	25 each Miniature slide	$2.00
GB121	20 ea. Pushbutton (1 pole and repeat — class cuts)	5.00
GB122	40 each toggle, rocker, pushbutton	10.00
GB123	20 each Dip Switches (various)	5.00

HARDWARE

GB139	40 each Trimming Strips (color coded from 10 to 6 terminals)	$2.00
GB140	100 each Spacers, standoff, insulators (metal, nylon, screw and hex types)	2.00
GB001	200 each Washers and Gaskets (nylon and teflon)	2.00
GB002	50 ea. Grommets, cord strain reliefs	2.00
GB004	200 each Solder lugs (small)	2.00
GB005	100 each Lugs — Large (some insulated)	2.00
GB140	100 each Grommets, cord strain reliefs (various sizes)	2.00
GB147	500 each Hardware mix (nuts, bolts, screws, lugs)	5.00
GB148	40 Threaded rods and spacers (assort. (1-2" long)	2.00
GB167	300 pcs. sheet metal and metal tapping screws	2.00
GB168	100 each Screws, nuts, clip mounters, etc.	2.00
GB169	100 pcs. hex angle and harness clips (3-5")	2.00
GB170	100 pcs. Rubber feet, guns, shafts, wheels, motors	5.00

MISCELLANEOUS

GB119	20 each Hex Skts. — assorted sizes	$3.00
GB125	20 each assorted Knobs (some hardware)	2.00
GB126	50 each Opto-Isolators — UL 1 Series (untested)	2.00
GB131	20 each Transistor Sockets (TO-5, TO-18, TO-92)	2.00
GB132	20 each Tinned Cans — iron and type	4.00
GB133	20 each Photo Transistors (opto)	4.00
GB141	1 each Tape Drive — 8V motor with capstan (tape head and 3 speeds taped, no cartridge)	2.00
GB124	20 each 6" shrink tubing, ass. sizes and colors	4.00
GB128	20 each Diodes, zeners, rectifiers (miscellaneous assortment)	2.00
GB129	2 each Speakers, 2½" 8 ohm, 1/4 watt	1.00
GB155	200 each mixed resistors, capacitors (assorted values)	2.00
GB160	100 each Printed Circuit Board (various sizes)	2.00
GB163	20 ea. Sockets (dual, IC and transistor)	4.00
GB177	250 each 1" Boom tubing, ass. colors and sizes	2.00

$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6% Sales Tax
Postage — Add 5% plus $1.50 Insurance
Send S.A.S.E. for Monthly Sale Flyer!

Spec Sheets — 25c
Send 88c Postage for your FREE 1982 JAMECO CATALOG
Prices Subject to Change

NEW! 1982 CATALOG

Mail Order Electronics Worldwide

Jameco ELECTRONICS

NEW! Telex Number Telex 176043

1355 SHOREWAY ROAD, BELMONT, CA 94002
PHONE ORDERS WELCOME — (415) 592-8097

6/82 ☞38

BOOKS

National Semiconductor — Interall — Intel

20001	National CMOS Data Book (640 pages) 74C, CD4000, and A/D Converters	6.95
20002	National Interface Data Book (704 pages) DP, DS8000, DS3000, DS75000, etc.	6.95
20003	National Linear Data Book (1376 pages) LM, LF, ADC, DAC, LH Series	11.95
20004	National Series 80 — Board Level Computer (224 pages)	4.95
20005	National TTL Logic Data Book (624 pages) 7400,LS,L,H,S, and DM8000 Series	6.95

30006 Above (3) 30001,3,5 es set $24.95/lot

010400	Intel Component Data Catalog	4.95
	Full data sheets for Intel's products incl. memory devices, microproc., peripherals & indust./mil. products (1328 pages)	
205810	Intel Peripheral Design Handbook	9.95
	Full data sheets, appl. notes for Intel peripheral device components (644 pages)	

AC and DC Wall Transformers

With Universal Plug and 9V Battery Snap

Selective voltages: 6,9,12VDC. Polarity selection (+/-). six-foot line from adapter to plugs on six-inch line from adapter to battery snap. 120V/60Hz. 300mA.

Part No.	Input	Output	Price
AC 250	117V/60Hz	12VAC 250mA	$3.95
AC 500	117V/60Hz	12VAC 500mA	$4.95
AC1000	117V/60Hz	12VAC 1 amp	$6.95
AC1700	117V/60Hz	9VAC 1.7 amp	$3.95
DC 600	120V/60Hz	9VDC 400mA (batt. charger)	$1.95
DC6912 (above)	120V/60Hz	6,9,12VDC 300mA	$9.95
DY9200	117V/60Hz	9VDC 200mA	$3.25
DC9300	120V/60Hz	9VDC 500mA	$3.95
DC1200	120V/60Hz	12VDC 300mA	$2.95

CONNECTORS

DB25P	D-Subminiature Plug	$2.95
DB25S	D-Subminiature Socket	$3.50
D20418-2	Screw Lock Hdwr. (2) DB25S/P	2/$.99
DBS1226	Cover for DB25P/S	$1.75
22/44SE	P.C. Edge (22/44 Pin)	$2.95
UG88/U	BNC Plug	$1.79
UG89/U	BNC Jack	$3.79
UG175/U	UHF Adapter	$ .49
SO239	UHF Panel Recp.	$1.29
PL258	UHF Adapter	$1.60
PL259	UHF Plug	$1.60
UG260/U	BNC Plug	$1.79
UG1094/U	BNC Bulkhead Recp.	$1.29

TRS-80 16K Conversion Kit

Expand your 4K TRS-80 System to 16K
Kit comes complete with:

- **8 ea. MM5290 (UPD416/4116) 16K Dyn. Ram (*ea)**
- **Documentation for conversion**

TRS-16K2 *150ns 19.95
TRS-16K3 *200ns 16.95
TRS-16K4 *250ns 14.95

KEYBOARDS



Datanectics 74-Key Keyboard

Uses EA 20134 Chip (Electronic Arrays). Size: 16⅛"L x 5½"W x 1-3/8"H. White, black, blue, grey key caps. (No Data Sheet) —

Part No. KB354 ..... **$29.95 ea.**

Micro Switch 69-Key Keyboard

Uses AMI SW20350K Chip. Size: 16-3/8"L x 5⅛"W x 1-5/8"H Metal Frame. Light & dark grey key caps (No Data Sheet)

Part No. KB69SD12-2 ..... **$19.95 ea.**

Boschert Multi-Voltage Power Supply

5VDC, 12VDC and 24VDC

FEATURES: Voltages*: 5VDC @ 25amps, 12VDC @ 4amps, & 24VDC @ 4amps. Reg. Load: +5V out ±1%, +12 & 24V out ±5% (20-100% load). Overvolt. & overcurrent protection. 115 or 230VAC input. Wt. 4 lbs. Size: 4.90" x 2.98" x 15.60".
***Total average output shall not exceed 200 watts.**

General Description: The "Boschert" Power Supply was originally designed for application with ITT Advance Terminal Controller (ATC). This open frame switching power supply provides user with high current requirements common in use with computer systems. Its compact size provides versatility for mounting into electronic enclosures. Each supply has 8 threaded fasteners (item not type) for mounting. Specification requirements to be used with ATC enclosure.

Part No. 200-3010 ..... **$69.95 each**
— MANY OTHERS AVAILABLE • WRITE FOR INFORMATION —

JE600 Hexadecimal Encoder Kit

FULL 8-BIT LATCHED OUTPUT 19-KEY KEYBOARD

The JE600 Encoder Keyboard Kit provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8-bit microprocessor or 8-bit memory circuits. Three additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with 9 LED readouts. Also included is a key entry strobe. Features: Full 8-bit latched output for microprocessor use. Three user-define keys with one being bistable operation. Debounce circuit provided for all 19 keys. 9 LED readouts to verify entries. Easy interfacing with standard 16-pin IC connector. Only +5VDC required for operation. Size: 3⅛"H x 8¾"W x 8⅛"D

JE600/DTE-HK (After assembled as pictured above) **$99.95**
JE600 Kit 19-Key Hexadec. Keyboard, PC Board & Cmpnts. (no case) .. **$59.95**
K19 19-Key Keyboard (Keyboard only) **$14.95**
DTE-HK (case only — 3⅛"Hx8¾"Wx8⅛"D) **$44.95**

☞See List of Advertisers on page 114

DEALER DIRECTORY

Phoenix AZ

The Southwest's most progressive communications company stocking Kenwood, Icom, Yaesu, MFJ, B&W, Astron, Larsen, Cushcraft, Hy-Gain, Bearcat, and more. Would like to serve you! **Power Communications Corp., 1640 West Camelback Rd., Phoenix AZ 85015, 241-Watt.**

Culver City CA

Jun's Electronics, 3919 Sepulveda Blvd., Culver City CA 90230, 390-5003. Trades 463-1886 San Diego, 827-5732 (Reno NV).

Fontana CA

Complete lines ICOM, DenTron, Ten-Tec, Mirage, Cubic, Lunar, over 4000 electronic products for hobbyist, technician, experimenter. Also CB radio, landmobile. **Fontana Electronics, 8628 Sierra Ave., Fontana CA 92335, 822-7710.**

San Diego CA

We buy and sell Surplus Army Navy Electronic, also Terminated Material. What do you want to sell? Write for catalogue. **Electronic-town, Inc., 440-7th Avenue, PO Box 2045, San Diego CA 92112, 232-9379.**

San Jose CA
SAN FRANCISCO BAY AREA

Homebrewers' haven; tons of new and used Ham/Computer gear and components. Serving Hams since 1958. We specialize in ICOM, KLM, Mirage, Comptronix. We ship worldwide. **Tele-Com Electronics, 15460 Union Avenue, San Jose CA 95124, 377-4479.**

San Jose CA

Bay area's newest Amateur Radio store. New & used Amateur Radio sales & service. We feature Kenwood, ICOM, Azden, Yaesu, Ten-Tec, Santec & many more. **Shaver Radio, Inc., 1378 So. Bascom Ave., San Jose CA 95128, 998-1103.**

Smyrna GA

For your Kenwood, Yaesu, ICOM, Drake and other amateur needs, come to see us. **Britt's Two-Way Radio, 2560 N. Atlanta Rd., Smyrna GA 30080, 432-8006.**

Preston ID

Ron WB7BYZ, has the Largest Stock of Amateur Gear in the Intermountain West and the Best Prices. Call me for all your ham needs. **Ross Distributing, 78 So. State, Preston ID 83263, 852-0830.**

Terre Haute IN

Your ham headquarters located in the heart of the midwest. **Hoosier Electronics, Inc., #9 Meadows Center, P.O. Box 3300, Terre Haute IN 47803, 238-1456.**

Littleton MA

The ham store of N.E. you can rely on. Kenwood, ICOM, Wilson, Yaesu, DenTron, KLM amps, B&W switches & wattmeters. Whistler radar detectors, Bearcat, Regency, antennas by Larsen, Wilson, Hustler, GAM. **TEL-COM Inc. Communications & Electronics, 675 Great Rd., Rt. 119, Littleton MA 01460, 486-3040.**

Ann Arbor MI

See us for products like Ten-Tec, R. L. Drake, Dentron and many more. Open Monday through Saturday, 0830 to 1730. WB8VGR, WB8UXO, WD8OKN and W8RP behind the counter. **Purchase Radio Supply, 327 E. Hoover Ave., Ann Arbor MI 48104. 668-8696.**

Hudson NH

New England's Distributor and Authorized Service Center for all Major Amateur Lines. **Tufts Radio Electronics, Inc., 61 Lowell Road, Hudson NH 03051, 883-5005.**

Somerset NJ

New Jersey's only factory-authorized ICOM and YAESU distributor. Large inventory of new and used specials. Most major brands in stock. Complete service and facilities. **Radios Unlimited, 1760 Easton Avenue, P.O. Box 347, Somerset NJ 08873; 469-4599.**

Syracuse-Central NY

HAM-BONE RADIO SAVES US LOT OF $$$ on all Icom, Ten-Tec, Hygain & Kantronics Gear. Fast, Dependable Service Before & After the Sale! Service is Our Main Business! Need Cash-Ham-Bone will sell your gear for 10% commission. 3306 Erie Blvd. E., Syracuse 13214, 446-2266.

Philadelphia PA/
Camden NJ

Waveguide & Coaxial Microwave Components & Equipment. Laboratory Grade Test Instruments, Power Supplies, Buy, Sell & Trade all popular makes—HP, GR, FXR, ESI, Sorensen, Singer, etc. **Lectronic Research Labs, 1423 Ferry Ave., Camden NJ 08104, 541-4200.**

Amsterdam NY
UPSTATE NEW YORK

Kenwood, ICOM, Drake, plus many other lines, Amateur Dealer for over 35 years. **Adirondack Radio Supply, Inc., 185 West Main Street, Amsterdam NY 12010, 842-8350.**

Syracuse-Rome-Utica NY

Featuring: Kenwood, Yaseu, ICOM, Drake, Ten-Tec, Swan, DenTron, Alpha, Robot, MFJ, Tempo, Astron, KLM, Hy Gain, Mosley, Larsen, Cushcraft, Hustler, Mini Products. You won't be disappointed with equipment/service. **Radio World, Oneida County Airport-Terminal Building, Oriskany NY 13424, 337-0203.**

Columbus OH

The biggest and best Ham Store in the midwest featuring quality Kenwood products with working displays. We sell only the best. Authorized Kenwood Service. **Universal Amateur Radio Inc., 1250 Aida Dr., Reynoldsburg (Columbus) OH 43068, 866-4267.**

Bend OR

Satellite TV. Known brands. Call today for more information and inquire about our dealer program. **WESPERCOM, P.O. Box 7226, Bend OR 97708, 389-0096.**

Scranton PA

ICOM, Bird, CushCraft, Beckman, Fluke, Larsen, Hustler, Antenna Specialists, Astron, Avanti, Belden, W2AU/W2VS, CDE, AEA, Vibroplex, Ham-Key, CES, Amphenol, Sony, Fanon/Courier, B&W, Ameco, Shure. **LaRue Electronics, 1112 Grandview St., Scranton PA 18509, 343-2124.**

Dallas TX

Dealer in Used Computer Hardware & Electronic Parts. Special on Daisy Wheel Printers, Xerox Word Processing Equipment, Dual Card Printers and Display Systems. Catalog $1.00. **Rondure Company (The Computer Room) Dept. 73, 2323 Butler St., Dallas, TX 75235, 630-4621.**

San Antonio TX

Amateur, Commercial 2-say. Selling Antenna Specialists, Avanti, Azden, Bird, Hy-gain, Standard, Vibroplex, Midland, Henry, CushCraft, Dielectric, Hustler, ICOM, MFJ, Nye, Shure, Cubic, Tempo, Ten-Tec and others. **Appliance & Equipment Co., Inc. 2317 Vance Jackson Road, San Antonio TX 78213, 938-3350.**

Vienna VA

The Washington metropolitan area's leading supplier of the latest in Amateur Radio and Test Equipment. On your next trip to the Nation's Capital, stop by and see us. **Electronic Equipment Bank, Inc., 516 Mill St. N.E., Vienna VA 22180, 938-3350.**

DEALERS

Your company name and message can contain up to 25 words for as little as $150 yearly (prepaid), or $15 per month (prepaid quarterly). No mention of mail-order business or area code permitted. Directory text and payment must reach us 60 days in advance of publication. For example, advertising for the August '82 issue must be in our hands by June 1st. Mail to 73 Magazine, Peterborough NH 03458. ATTN: Nancy Ciampa.

PROPAGATION

J. H. Nelson
4 Plymouth Dr.
Whiting NJ 08759

EASTERN UNITED STATES TO:

GMT:	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA	14	14	14	7	7	7	7	7	7A	14	14	14
ARGENTINA	21	21	14A	14	14	7	14	21	21	21	21A	21A
AUSTRALIA	21	14A	14	14	7	7B	7	7	7B	7B	14	14A
CANAL ZONE	21	14A	14	14	14	7	14	14	21	21	21	21
ENGLAND	14	7A	7	7	7	14	14	14A	21	14A	14A	14
HAWAII	14A	14	14	14	7	7	7	14	14	14	14	14
INDIA	14	14	7B	7B	7B	7B	14	14	14	14	14	14
JAPAN	14	14	14	7B	7B	7B	7B	7B	14	14	14	14
MEXICO	14	14	14	14	7	7	14	14	14	14	21	21
PHILIPPINES	14	14	14B	7B	7B	7B	7B	14	14	14	14	14
PUERTO RICO	21	14	14	14	7	7	14	14	21	21	21	21
SOUTH AFRICA	14	7B	7B	14	14	14	21	21	21A	21A	14	14
U. S. S. R.	14	7A	7	7	7	14	14	14	14	14	14	14
WEST COAST	14A	14	14	7A	7	7	7	14	14	14A	14A	21

CENTRAL UNITED STATES TO:

ALASKA	14	14	14	14	7	7	7	7	7A	14	14	14
ARGENTINA	21	21	14A	14	14	7	14	21	21	21	21A	21A
AUSTRALIA	21	21	14	14	14	14	7	7	7B	7B	14	14A
CANAL ZONE	21	14A	14	14	14	7	14	14	21	21	21	21
ENGLAND	14	7	7	7	7	7	7	14	14	14	14A	14
HAWAII	14A	14A	14	14	7A	7	7	14	14	14	14	14
INDIA	14	14	14	7B	7B	7B	7B	7B	14	14	14	14
JAPAN	14	14	14	14	7B	7B	7B	7B	14	14	14	14
MEXICO	14	14	14	14	7	7	7	14	14	14	21	21
PHILIPPINES	14	14	14	14B	7B	7B	7B	7B	14	14	14	14
PUERTO RICO	21	14	14	14	7	7	14	14	14A	21	21	21
SOUTH AFRICA	14	7B	7B	7B	7B	14B	14	14	14	14	14	14
U. S. S. R.	14	7A	7	7	7	7	7	14	14	14	14	14

WESTERN UNITED STATES TO:

ALASKA	14	14	14	7A	7	7	7	7	7A	14	14	14
ARGENTINA	21	21	14A	14	14	7	14	21	21	21	21A	21A
AUSTRALIA	21A	21A	21	14A	14A	14	14	7	7B	7B	14A	21
CANAL ZONE	21	14A	14	14	14	7	7	14	14	21	21	21
ENGLAND	14	7	7	7	7	7	14B	14	14	14	14	14
HAWAII	21A	21A	21	14A	14	14	14	14	14	14A	21	21
INDIA	14	14	14	14	7B	7B	7B	7B	14	14	14	14
JAPAN	14	14	14	14	14	14B	7	7	14	14	14	14
MEXICO	14	14	14	14	7	7	7	14	14	14	21	21
PHILIPPINES	14A	14	14	14	14B	14B	7B	7B	14	14	14	14A
PUERTO RICO	21	14A	14	14	7	7	14	14	14	14A	21	21
SOUTH AFRICA	14	7B	7B	7B	7B	7B	14B	14	14	14	14	14
U. S. S. R.	14	7A	7	7	7	7	7	7B	14	14	14	14
EAST COAST	14A	14	14	7A	7	7	7	14	14	14A	14A	21

First letter = day waves Second = night waves
A = Next higher frequency may also be useful
B = Difficult circuit this period F = Fair G = Good
P = Poor * = Chance of solar flares; # = of aurora

JUNE

SUN	MON	TUE	WED	THU	FRI	SAT
		1 G/F	2 G/F	3 G/G	4 G/G	5 G/G
6 G/G	7 G/F	8 G/G	9 G/G	10 G/G	11 G/G	12 G/G
13 G/G	14 G/G	15 G/G*	16 F/F*	17 F/P	18 F/F	19 G/G
20 G/G	21 G/G	22 G/F	23 G/G	24 G/G	25 G/F	26 G/G
27 G/G	28 G/F	29 G/G	30 G/G			

Reader Service for facing page ↗83→

FT-230R: QUITE A SIGHT! (AND EASY TO SEE, TOO!!)

Sporting an all-new Liquid Crystal Display, the FT-230R is Yaesu's high-performance answer to your call for a very affordable 2 meter mobile rig with an easy-to-read frequency display! The FT-230R combines microprocessor convenience, a sensitive receiver, a powerful yet clean transmitter strip, and the new dimension of LCD frequency readout. See your Authorized Yaesu Dealer today — and go home with your new FT-230R!

SALE SUBJECT FCC CERTIFICATION

- LCD five-digit frequency readout with night light for high visibility day or night.
- Two VFOs for quick QSY across the band.
- Ten memory slots for storage and recall of favorite channels.
- Selectable synthesizer steps (5 kHz or 10 kHz) in dial or scanning mode.
- Priority channel for checking a favorite frequency for activity while monitoring another.
- Unique VFO/Memory Split mode for covering unusual repeater splits.
- Up/Down band scan plus memory scan for busy or clear channel. Scanning microphone included in purchase price.
- Full 25 watts of RF power output from extremely compact package.
- Built-in automatic or manual tone burst.
- Optional synthesized CTCSS Encode and Encode/Decode boards available.
- Lithium memory backup battery with estimated lifetime of five years.
- Optional YM-49 Speaker/Microphone and YM-50 DTMF Encoding Microphone provide maximum operating versatility.

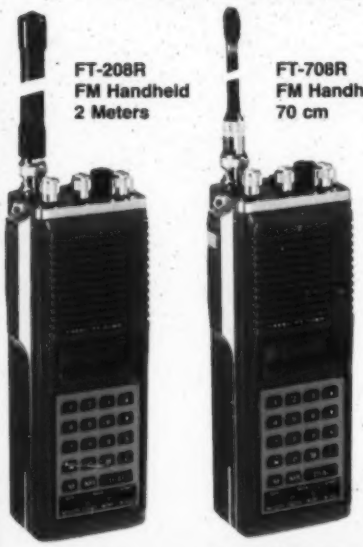

FT-208R
FM Handheld
2 Meters

FT-708R
FM Handheld
70 cm

And don't forget! Yaesu has a complete line of VHF and UHF handheld and battery portable transceivers using LCD display!!!

FT-290R - 2 Meters
SSB/CW/FM Portable

FT-690R - 6 Meters
USB/CW/AM/FM Portable

YAESU
The radio.

Price and Specifications Subject To Change Without Notice or Obligation

482

YAESU ELECTRONICS CORP. 6851 Walthall Way, Paramount, CA 90723 • (213) 633-4007
Eastern Service Ctr., 9812 Princeton-Glendale Rd., Cincinnati, OH 45246 • (513) 874-3100

NEW

"DX-traordinary."

Superior dynamic range, auto. antenna tuner, QSK, dual NB, 2 VFO's, general coverage receiver.

TS-930S

The TS-930S is a superlative, high performance, all-solid state, HF transceiver keyed to the exacting requirements of the DX and contest operator. It covers all Amateur bands from 160 through 10 meters, and incorporates a 150 kHz to 30 MHz general coverage receiver having an excellent dynamic range.

Among its other important features are, SSB slope tuning, CW VBT, IF notch filter, CW pitch control, dual digital VFO's, CW full break-in, automatic antenna tuner, and a higher voltage operated solid state final amplifier. It is available with or without the AT-930 automatic antenna tuner built-in.

TS-930S FEATURES:

- **160-10 Meters, with 150 kHz - 30 MHz general coverage receiver.**
  Covers all Amateur frequencies from 160-10 meters, including new WARC, 30, 17, and 12 meter bands, on SSB, CW, FSK, and AM. Features 150 kHz - 30 MHz general coverage receiver. Separate Amateur band access keys allow speedy band selection. UP/DOWN bandswitch changes in 1-MHz steps. A new, innovative, quadruple conversion, digital PLL synthesized circuit provides superior frequency accuracy and stability, plus greatly enhanced selectivity.
- **Excellent receiver dynamic range.**
  Receiver two-tone dynamic range, 100 dB typical (20 meters, 500 Hz CW bandwidth, at sensitivity of 0.25 μv, S/N 10 dB), provides the ultimate in rejection of IM distortion.
- **All solid state, 28 volt operated final amplifier.**
  The final amplifier operates on 28 VDC for lowest IM distortion. Power input rated at 250 W on SSB, CW, and FSK, and at 80 W on AM. Final amplifier protection circuit with cooling fan, SWR/Power meter built-in.
- **Automatic antenna tuner, built-in.**
  Available with AT-930 antenna tuner built-in, or as an option. Covers Amateur bands 80-10 meters, including the new WARC bands. Tuning range automatically pre-selected with band selection to minimize tuning time. "AUTO-THRU" switch on front panel.
- **CW full break-in.**
  CW full break-in circuit uses CMOS logic IC plus reed relay for maximum flexibility, coupled with smooth, quiet operation. Switchable to semi-break-in.
- **Dual digital VFO's.**
  10-Hz step dual digital VFO's include band information. Each VFO tunes continuously from band to band. A large, heavy, flywheel type knob is used for improved tuning ease. T.F. Set switch allows fast transmit frequency setting for split-frequency operations. A=B switch for equalizing one VFO frequency to the other. VFO "Lock" switch provided. RIT control for ±9.9 kHz receive frequency shift.
- **Eight memory channels.**
  Stores both frequency and band information. VFO-MEMO switch allows use of each memory as an independent VFO, (the original memory frequency can be recalled at will), or as a fixed frequency. Internal Battery memory back-up, estimated 1 year life. (Batteries not Kenwood supplied).
- **Dual mode noise blanker ("pulse" or "woodpecker").**
  NB-1, with threshold control, for pulse-type noise. NB-2 for longer duration "woodpecker" type noise.
- **SSB IF slope tuning.**
  Allows independent adjustment of the low and/or high frequency slopes of the IF passband, for best interference rejection.
- **CW VBT and pitch controls.**
  CW VBT (Variable Bandwidth Tuning) control tunes out interfering signals. CW pitch controls shifts IF passband and simultaneously changes the pitch of the beat frequency. A "Narrow/Wide" filter selector switch is provided.
- **IF notch filter.**
  100-kHz IF notch circuit gives deep, sharp, notch, better than -40 dB.
- **Audio filter built-in.**
  Tuneable, peak-type audio filter for CW.
- **AC power supply built-in.**
  120, 220, or 240 VAC, switch selected (operates on AC only).
- **Fluorescent tube digital display.**
  Fluorescent tube digital display has analog type sub-scale with 20-kHz steps. Separate 2 digit display indicates RIT frequency shift.
- **RF speech processor.**
  RF clipper type processor provides higher average "talk-power," plus improved intelligibility. Separate "IN" and "OUT" front panel level controls.
- **One year warranty.**
  The TS-930S carries a one year limited warranty on parts and labor.

Other features:

- SSB monitor circuit, 3 step RF attenuator, VOX, and 100-kHz marker.

Optional accessories:

- AT-930 automatic antenna tuner.
- SP-930 external speaker with selectable audio filters.
- YG-455C-1 (500 Hz) or YG-455CN-1 (250 Hz) plug-in CW filters for 455-kHz IF.
- YK-88C-1 (500 Hz) CW plug-in filter for 8.83-MHz IF.
- YK-88A-1 (6 kHz) AM plug-in filter for 8.83-MHz IF.
- MC-60 (S-8) deluxe desk microphone with UP/DOWN switch.
- TL-922A linear amplifier.
- SM-220 station monitor.
- HC-10 digital world clock.
- HS-6, HS-5, HS-4 headphones.

More information on the TS-930S is available from all authorized dealers of Trio-Kenwood Communications
1111 West Walnut Street,
Compton, California 90220

KENWOOD
...pacesetter in amateur radio

Specifications and prices are subject to change without notice or obligation.